

Sapwood in board face

DB . 28/02/08


Cow Tag <p style="text-align: center; font-size: 1.2em;">633</p>	Function Code <p style="text-align: center; font-size: 1.2em;">F 60.0</p>
---	--

Brief Description: [timber element, p/s, condition, fragments]
Part of floor. large crack in middle.

Notable Features: [tool marks, scribed lines, decoration, repairs] POINTS TO LOOK OUT FOR WHEN RECORDING

Type 4 on forward (vague)

inboard: calibration difficult (even with leap fogging)

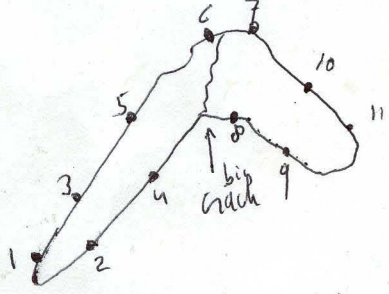

Δ between 1, 2, 3 \Rightarrow X: 0,681 Y: 0,727

Δ between 7, 8, 11 \Rightarrow X: 0,330 Y: 0,439

Sapwood on x-face not drawn with Faro arm (initially forgotten) but reconstructed with poly lines, using lines already drawn on x-face surface and by looking at the sapwood on the x-face of the timber.

Masked in anti-fingerprint on upper ends of arms


T.1	T.2	T.3	T.4	T.5	T.6	T.7	T.8
			✓				

Wood Science: [rings, ARW, knots, sapwood, conversion]

Core of tree

C + 50 H + 15 S + Be

ARW = 160/65

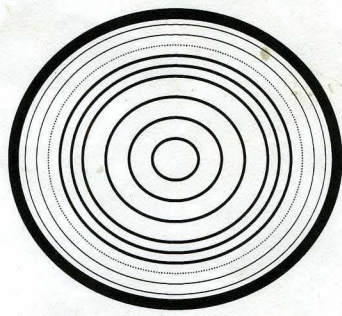

Recommended action: [samples, additional photos, moulding, queries and problems]

↓ photos of these please plus some general photos

Cleaned: <i>LB, MS 29 March 07</i>	Recorded: <i>DV 17/4/07</i>	Photos: <i>28/02/08 JV</i>
--	--------------------------------	-------------------------------

Checked: [corrections needed]	Initials & Date: <i>NN 5/2/8</i>
-------------------------------	-------------------------------------

Corrections Done [desktop, Faro Arm?]:	Initials & Date:
--	------------------