MANOR HOUSE, I EAST GREEN, HEIGHINGTON, NEAR DARLINGTON, COUNTY DURHAM TREE-RING ANALYSIS OF TIMBERS

SCIENTIFIC DATING REPORT

Alison Arnold and Robert Howard





INTERVENTION AND ANALYSIS

This report has been prepared for use on the internet and the images within it have been down-sampled to optimise downloading and printing speeds.

Please note that as a result of this down-sampling the images are not of the highest quality and some of the fine detail may be lost. Any person wishing to obtain a high resolution copy of this report should refer to the ordering information on the following page. Research Report Series 11-2012

MANOR HOUSE, I EAST GREEN, HEIGHINGTON, NEAR DARLINGTON, COUNTY DURHAM

TREE-RING ANALYSIS OF TIMBERS

Alison Arnold and Robert Howard

NGR: NZ 2505 2235

© English Heritage

ISSN 2046-9799 (Print) ISSN 2046-9802 (Online)

The Research Report Series incorporates reports by the expert teams within the Investigation & Analysis Division of the Heritage Protection Department of English Heritage, alongside contributions from other parts of the organisation. It replaces the former Centre for Archaeology Reports Series, the Archaeological Investigation Report Series, the Architectural Investigation Report Series, and the Research Department Report Series.

Many of the Research Reports are of an interim nature and serve to make available the results of specialist investigations in advance of full publication. They are not usually subject to external refereeing, and their conclusions may sometimes have to be modified in the light of information not available at the time of the investigation. Where no final project report is available, readers must consult the author before citing these reports in any publication. Opinions expressed in Research Reports are those of the author(s) and are not necessarily those of English Heritage.

Requests for further hard copies, after the initial print run, can be made by emailing: Res.reports@english-heritage.org.uk or by writing to: English Heritage, Fort Cumberland, Fort Cumberland Road, Eastney, Portsmouth PO4 9LD Please note that a charge will be made to cover printing and postage.

SUMMARY

Dendrochronological analysis of 12 samples from the front range and rear stair wing roofs of the Manor House, Heighington, produced a single site chronology, HEIASQ01, comprising 11 samples and having an overall length of 159 rings. These rings were dated as spanning the years AD 1471–1629. Interpretation of the sapwood on the dated samples would indicate that the roof timbers of both the front range and rear stair wing were cut as part of a single programme of felling some time between AD 1630 and AD 1655.

CONTRIBUTORS

Alison Arnold and Robert Howard

ACKNOWLEDGEMENTS

The Nottingham Tree-ring Dating Laboratory would like to thank Mrs Elizabeth Banks, the owner of the Manor House, for her enthusiasm and cooperation with this programme of tree-ring analysis and for hospitality and help during sampling. We would also like to thank the North East Vernacular Architecture Group and Martin Roberts, then Historic Building Inspector at English Heritage's Newcastle-upon-Tyne Office, for help and advice during sampling and also for providing the draft NEVAG building survey report and drawings used in this report.

ARCHIVE LOCATION

Durham HER Regeneration & Economic Development Design & Historic Environment Team Durham County Council The Rivergreen Centre Aykley Heads Durham DH1 5TS

DATE OF INVESTIGATION 2010–11

CONTACT DETAILS Alison Arnold and Robert Howard Nottingham Tree-ring Dating Laboratory 20 Hillcrest Grove Sherwood Nottingham NG5 1FT 0115 960 3833 roberthoward@tree-ringdating.co.uk alisonarnold@tree-ringdating.co.uk

CONTENTS

Introduction	I
Sampling	2
Analysis	2
Interpretation	3
Bibliography	5
Tables	6
Figures	8
Data of Measured Samples	16
Appendix: Tree-Ring Dating	19
The Principles of Tree-Ring Dating	19
The Practice of Tree-Ring Dating at the Nottingham Tree-Ring Dating Laboratory	19
I. Inspecting the Building and Sampling the Timbers	19
2. Measuring Ring Widths	24
3. Cross-Matching and Dating the Samples	24
4. Estimating the Felling Date	25
5. Estimating the Date of Construction	26
6. Master Chronological Sequences	27
7. Ring-Width Indices	27
References	31

INTRODUCTION

The Manor House stands to the north side of East Green, near the centre of the village of Heighington (NY 2505 2235 Figs 1- 3). The following information has been summarised from the initial draft of the building survey report (NEVAG forthcoming). Together with its neighbouring other half to the south (now Manor Farm) it was once a single, hearth-passage plan, farmhouse or small manor house, believed to date to the late-sixteenth or early-seventeenth century. In the late-seventeenth century the house was enlarged, and half a century later it was given a fine new dining room and staircase. Later still, in the eighteenth century, the building was divided into the two houses seen today (Fig 4) of which Manor House, unlike Manor Farm, is thought to retain the original roofs and first floor-frames.

Currently Manor House comprises a two-storey front range of single room depth orientated on a north-south axis facing west, with a gabled, two-storey, rear stair wing, orientated on an east-west axis, with adjacent offshoot. The roof of the front range (Fig 5) is divided into four bays by three principal rafter with tiebeam and collar trusses, the principal rafters being notched at the apex. The double purlins to each pitch are trenched into the backs of, and face-splayed and pegged together over, the principal rafters. The purlins span between the three trusses and the masonry end gable walls. There has been some replacement or reinforcement of the older timbers, especially of the purlins and the common rafters.

Carpenters' marks survive on two roof trusses in the front range, being numbered II and III on the southern and central trusses, respectively. This implies a possible missing truss at the south gable which was replaced when a possible smoke hood here was taken down and replaced by a chimney in the later seventeenth century. No such marks are to be seen on the northernmost truss of this range.

The roof structure of the rear stair wing comprises a single, central, principal rafter with tiebeam truss, without a collar, but again with double purlins trenched into the backs of the principals. This roof rises to almost the same height as, and is supported off the rear timbers of, the front range roof. The relationship of the two roofs strongly suggests that they were built at the same time, the common rafters of the front range being shortened at the junction of the two roofs and pegged to the purlins.

The first floor frame of the front range is seen as a number of beams in the ceilings to the ground floor rooms. The entrance hall has a single oak ceiling beam, chamfered with a concave stepped stop on its northern side only, while the living room ceiling is formed of two oak beams. The northern beam has deep chamfers and concave step stops, the southern one (also serving as the bresummer to a former open hearth) having a thinner chamfer towards the room and a deep, rougher, chamfer towards the fireplace wall. The dining room ceiling contains a single oak beam, another chamfered and concave stopped timber.

SAMPLING

Tree-ring sampling and analysis of timbers within the Manor House were requested by Martin Roberts, who at the time was the Historic Buildings Inspector based at English Heritage's Newcastle office. It was hoped that tree-ring analysis would establish with greater reliability and accuracy the probable construction date of the Manor, and confirm that both the roof of the front range and the rear stair wing were of one and the same phase of construction. In addition the analysis would add to the growing body of information relating to hearth-passage plan buildings with tiebeam and principal rafter roofs in the north-east region.

To this end, an examination was made of all the visible timbers within the building. It was seen at this time that whilst the majority of roof timbers were of a character suitable for tree-ring analysis (ie, were of oak and were likely to have the minimum number of rings required for reliable analysis), some timbers, principally the few accessible timbers of the first-floor frame, appeared to be derived from slightly faster grown trees. As such these timbers were unlikely to provide core samples with the usual minimum number of 54 rings here deemed necessary for reliable dating and, thus sampling was restricted to the roofs of the front range and rear stair wing.

Thus, from the suitable timbers available, a total of 12 samples was obtained by coring. Each sample was given the code HEI-A (for Heighington, site 'A') and numbered 01–12. As far as was evident, all the sampled timbers appeared to represent the primary construction phase of the present building and showed no evidence of reuse or later insertion and were hence likely to have been acquired specifically for the present building. The positions of the sampled timbers are shown on drawings made and provided by Martin Roberts from the draft building survey report (NEVAG forthcoming), reproduced here as Figures 6a–d. Details of the samples are given in Table 1. In this table the front range trusses have been numbered 1-3 from north to south (this ignoring the fact that at least two of the trusses are numbered from south to north, while a third truss is not numbered at all), that in the rear stair wing as truss 4 (Fig 5), and with timbers being further identified on a north–south, or east–west basis as appropriate.

ANALYSIS

Each of the 12 samples obtained in this programme of tree-ring dating was initially prepared by sanding and polishing, with the annual growth-ring widths of all 12 samples then being measured. The data of these measurements are given at the end of this report.

The data of the 12 samples were then compared with each other by the Litton/Zainodin grouping procedure (see Appendix), allowing a single group comprising 11 cross-matching samples to be formed. The samples of this group, cross-matching with each other at offsets as shown in Figure 7, were combined at their indicated offsets positions to form site chronology HEIASQ01, this site chronology having an overall length of 159 rings.

Site chronology HEIASQ01 was then compared with an extensive series of reference chronologies for oak, cross-matching repeatedly and consistently with a number of these when the date of its first ring is AD 1471 and the date of its last measured ring is AD 1629. The evidence for this dating is given in Table 2.

The single remaining ungrouped sample was also compared with a series of reference chronologies for oak, but there was no satisfactory cross-matching at any position, and this sample must, therefore, remain undated.

INTERPRETATION

None of the 11 dated samples of site chronology HEIASQ01 retain complete sapwood, and it is thus not possible to indicate a precise felling date for any of the trees represented. Eight of the samples do, however, retain some sapwood or at least the heartwood/sapwood boundary, meaning that only the sapwood rings and bark is missing.

Initially taking the two roofs separately, the average date of heartwood/sapwood boundary on the six samples from the front range roof which retain it is AD 1614. Using a 95% confidence limit of 15–40 for the number of sapwood rings the trees are likely to have had would give the timbers represented by these six samples an estimated felling date in the range AD 1629–54. The average heartwood/sapwood boundary date of the two samples from the rear stair wing roof is AD 1619. Using the same 95% confidence limit for the number of sapwood rings would give the timbers represented by these same 95% confidence limit for the number of sapwood rings and same stimated felling date in the range AD 1634–59.

It will be seen, therefore, that although the estimated felling date range of the two sets of timbers have a considerable overlap, from AD 1634 – 54, and are quite probably of a single phase of felling, it is just possible that the timbers of the rear stair wing roof were felled a few years later than those from the front range roof. This variation, however, might be as a result of the bias in the sample set, the front range roof being represented by six samples, the rear stair wing roof represented by only two samples whose heartwood/sapwood boundary dates lie within the overall range of the boundary dates for the front range samples. Taken together, the average date of the heartwood/sapwood boundary on all eight samples from both areas is AD 1615. Using a 95% confidence limit of 15–40 for the number of sapwood rings the trees are likely to have had would give the timbers represented an estimated felling date in the range AD 1630–55.

Although, because that they do not retain even the heartwood/sapwood boundary, the felling date range of the trees represented by the remaining three samples cannot be given, there is no reason, given that the timbers appear be integral to the rest of the structure, and there is no evidence by way of redundant mortices or peg holes etc, of their reuse from an older structure, to suspect that they were not also felled sometime between AD 1630 and AD 1655.

It would appear, therefore, that the roofs of the front range and rear stair wing of Manor House date to the early to mid part of the seventeenth century, and that both the front range and the rear stair wing are, as intimated by NEVAG (forthcoming), of a single phase of construction. Such an interpretation is further supported by the fact that samples from different areas cross-match sufficiently well with each other as to suggest that the trees they represent were growing close to each other in the same copse or stand of woodland. Sample HEI-A08, from the front range roof, and sample HEI-A11, from the rear stair wing, for example, cross-match with a value of t=8.9, while samples HEI-A09 and HEI-A12, also from the front range and stair wing respectively, cross-match with a value of t=10.8, suggesting the possibility that the two timbers represented may in fact be derived from the same tree. Such a phenomenon would be less likely if the trees had been felled at different times. The level of cross-matching between other samples also suggest a single-source woodland.

The location of this source woodland cannot be precisely determined through tree-ring analysis. However, as might be seen from Table 2, which lists some of the reference chronologies used to date site chronology HEIASQ01, the greatest similarity is with material from other sites in County Durham and Northumberland. This would suggest that the timber used in the construction of the Manor House was most likely of relatively local origin.

A single sample, HEI-A06, remains ungrouped and undated. There are no particular problems with this sample, such as compressed or distorted rings, which would make cross-matching and dating difficult. However amongst this number of suitable samples from a site, the inability to date one or more is a common feature of tree-ring analysis.

BIBLIOGRAPHY

Arnold, A J and Howard, R E, 2004 *Tree-ring analysis of timbers from Rock Farm, Front Street, Wheatley Hill, Co Durham*, EH Res Dept Rep Ser, **8/2004**

Arnold, A J, and Howard, R E, 2008 unpubl Tree-ring analysis of timbers from Norton Conyers Hall, Wath, North Yorkshire – Nottingham Tree-ring Dating Laboratory, unpubl computer file *NRCASQ02*

Arnold, A J, and Howard, R E, 2009a *The Chantry, Chantry Place, Morpeth, Northumberland, tree-ring analysis of timbers*, EH Res Dept Rep Ser, **68/2009**

Arnold, A J and Howard, R E, 2009b *Cockle Park Tower, Hebron, Morpeth, Northumberland: Tree-Ring Analysis of Timbers*, EH Res Dept Rep Ser, **44/2009**

Arnold, A J, Howard, R E, and Litton, C D, 2004 *Tree-ring analysis of timbers from Fell Close, Healeyfield, near Consett, County Durham*, Centre for Archaeol Rep, **35/2004**

Arnold, A J, Howard, R E, and Litton, C D, 2006 *Tree-Ring Analysis of Timbers from Low Harperley Farmhouse, Wolsingham, County Durham*, EH Res Dept Rep Ser, **6/2006**

Arnold, A J, Howard, R E, Laxton, R R, and Litton, C D, 2002 *Tree-ring analysis of timbers from Bull Hole Byre, Bearpark, Durham*, Centre for Archaeol Rep, **111/2002**

Howard, R E, Laxton, R R, and Litton, C D, 2001 *Tree-ring analysis of timbers from Hallgarth Manor Cottages, Hallgarth, Pittington, County Durham*, Centre for Archaeol Rep, **86/2001**

NEVAG, forthcoming Manor House, 1 East Green, Heighington, Darlington, Tees Valley, NEVAG report

Sample	Sample location	Total rings	Sapwood rings*	First measured ring	Last heartwood ring	Last measured ring
number				date AD	date AD	date AD
HEI-A01	East principal rafter, truss 1	140	h/s	1471	1610	1610
HEI-A02	West principal rafter, truss 1	58	no h/s	1551		1608
HEI-A03	Tiebeam, truss 1	81	h/s	1532	1612	1612
HEI-A04	East principal rafter, truss 2	61	no h/s	1526		1586
HEI-A05	West principal rafter, truss 2	68	no h/s	1536		1603
HEI-A06	Tiebeam, truss 2	58	no h/s			
HEI-A07	Collar, truss 2	100	h/s	1511	1610	1610
HEI-A08	West principal rafter, truss 3	72	h/s	1543	1614	1614
HEI-A09	Tiebeam, truss 3	115	8	1515	1621	1629
HEI-A10	Collar truss 3	112	2	1510	1619	1621
HEI-A11	South principal rafter, truss 4	58	h/s	1561	1618	1618
HEI-A12	Tiebeam, truss 4	95	h/s	1525	1619	1619

Table I: Details of tree-ring samples from Manor House, Heighington

*h/s = the heartwood/sapwood ring is the last ring on the sample

Table 2: Results of the cross-matching of site sequence HEIASQ01 and relevant reference chronologies when first ring date is AD 1471
and last ring date is AD 1629

Reference chronology	Span of chronology	<i>t-</i> value	Reference
The Chantry, Morpeth, Northumberland	AD 1336–1651	9.2	(Arnold and Howard 2009a)
Hallgarth Manor Cottages, Hallgarth Pittington, Co Durham	AD 1336–1624	6.5	(Howard <i>et al</i> 2001)
Low Harpurley Farmhouse, Wolsingham, Co Durham	AD 1356–1604	6.3	(Arnold <i>et al</i> 2006)
Norton Conyers, Wath, West Yorkshire	AD 1448–1609	6.0	(Arnold and Howard 2008 unpubl)
Rock Farm, Wheatley Hill, Co Durham	AD 1397–1569	5.9	(Arnold and Howard 2004)
Fell Close, Healeyfield, Consett, Co Durham	AD 1496–1651	5.5	(Arnold <i>et al</i> 2004)
Bull Hole Byre, Bearpark, Durham	AD 1452–1620	5.3	(Arnold <i>et al</i> 2002)
Cockle Park Tower, Hebron, Morpeth, Northumberland	AD 1394–1602	5.2	(Arnold and Howard 2009b)

FIGURES



Figure 1: Map to show the general location of Heighington. © Crown Copyright. All rights reserved. English Heritage 100019088. 2012

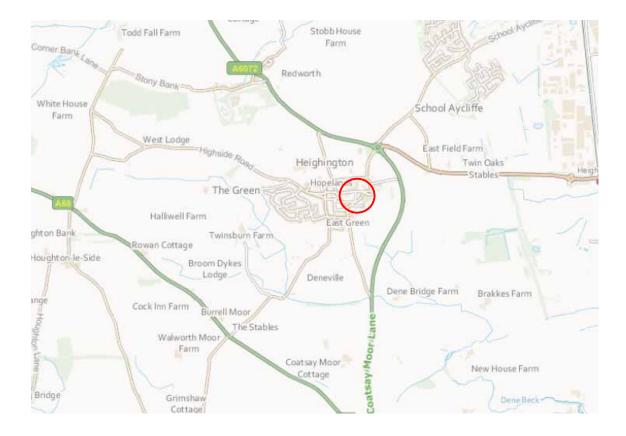


Figure 2: Map to show the general location of Heighington Manor. © Crown Copyright. All rights reserved. English Heritage 100019088.

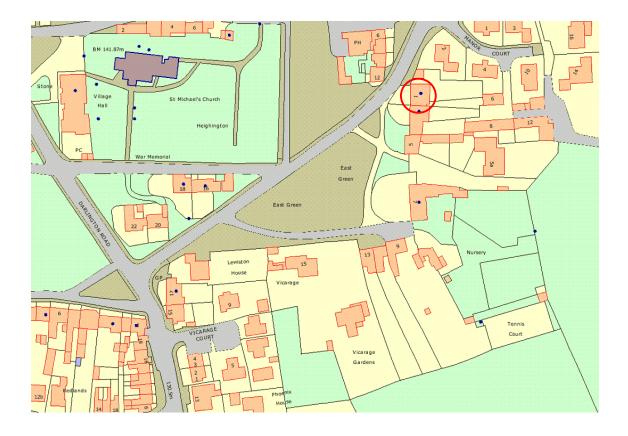


Figure 3: Map to show the location of Heighington Manor. © Crown Copyright. All rights reserved. English Heritage 100019088. 2012

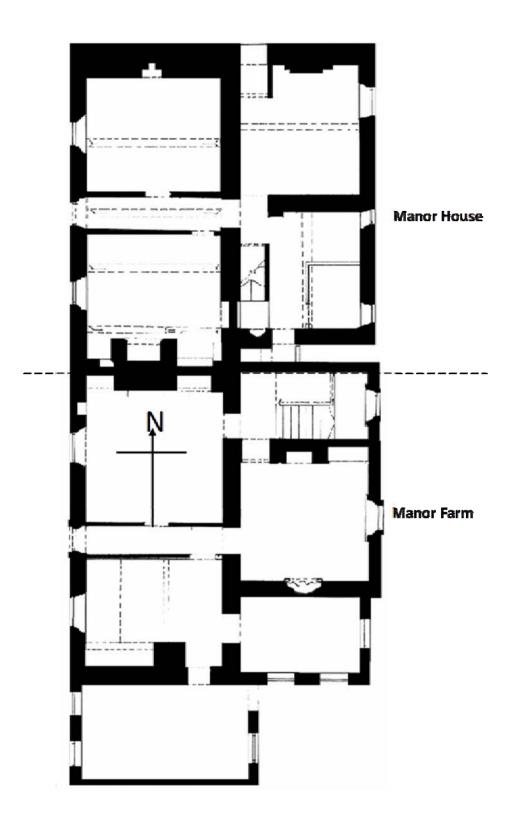


Figure 4: Ground floor plan of Heighington Manor (after NEVAG forthcoming)

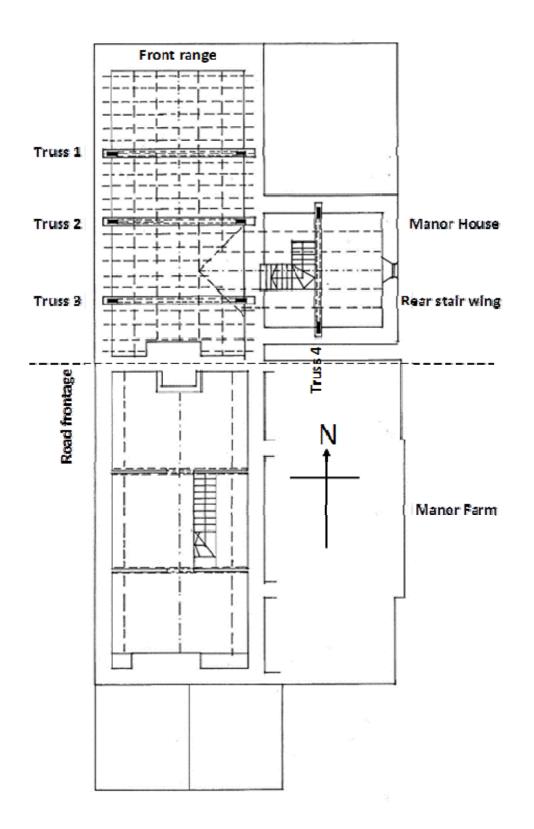


Figure 5: Roof plan of Heighington Manor (after NEVAG forthcoming)

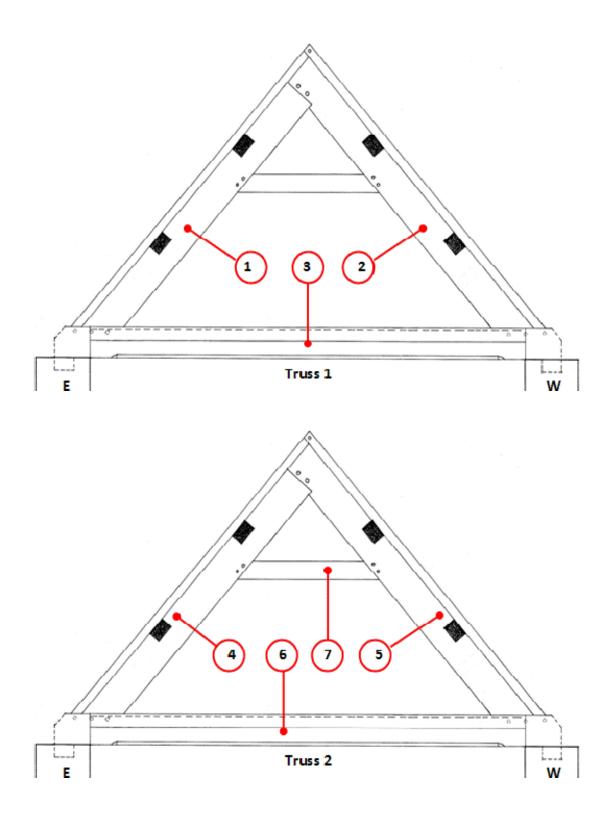


Figure 6a/b: Drawing of the roof trusses to show sampled timbers (after NEVAG forthcoming)


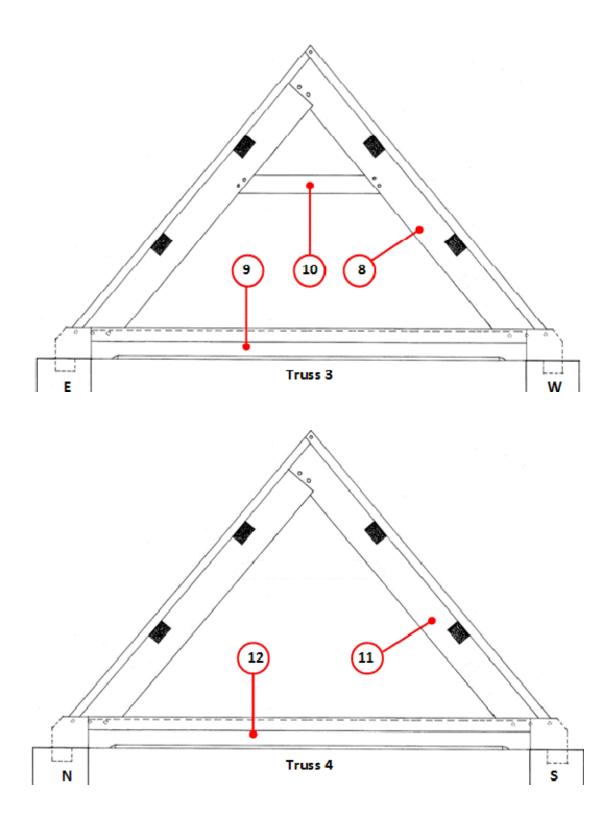


Figure 6c/d: Drawing of the roof trusses to show sampled timbers (after NEVAG forthcoming)

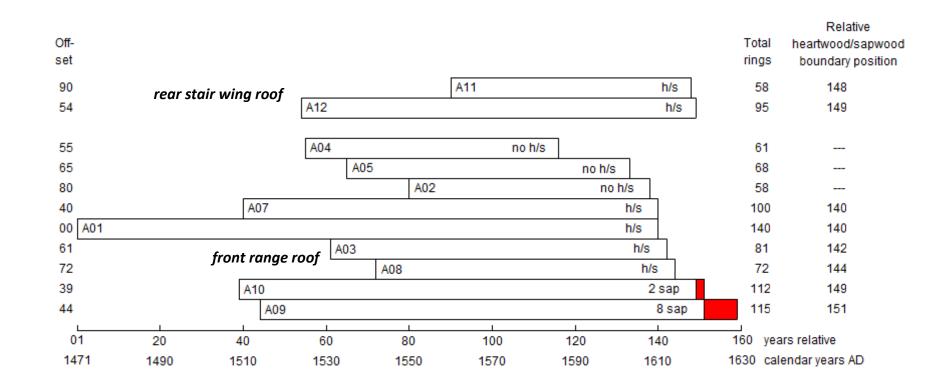

White bars = heartwood rings; Red bar = sapwood rings; h/s = the heartwood/sapwood ring is the last ring on the sample

Figure 7: Bar diagram of the samples in site chronology HEIASQ01

DATA OF MEASURED SAMPLES

Measurements in 0.01mm units

HEI-A01A 140

277 322 333 316 241 187 210 252 267 272 241 236 205 137 131 169 171 167 262 325

APPENDIX: TREE-RING DATING

The Principles of Tree-Ring Dating

Tree-ring dating, or dendrochronology as it is known, is discussed in some detail in the Laboratory's Monograph, An East Midlands Master Tree-Ring Chronology and its uses for dating Vernacular Building (Laxton and Litton 1988) and Dendrochronology: Guidelines on Producing and Interpreting Dendrochronological Dates (English Heritage 1988). Here we will give the bare outlines. Each year an oak tree grows an extra ring on the outside of its trunk and all its branches just inside its bark. The width of this annual ring depends largely on the weather during the growing season, about April to October, and possibly also on the weather during the previous year. Good growing seasons give rise to relatively wide rings, poor ones to very narrow rings and average ones to relatively average ring widths. Since the climate is so variable from year to year, almost randomlike, the widths of these rings will also appear random-like in sequence, reflecting the seasons. This is illustrated in Figure A1 where, for example, the widest rings appear at irregular intervals. This is the key to dating by tree rings, or rather, by their widths. Records of the average ring widths for oaks, one for each year for the last 1000 years or more, are available for different areas. These are called master chronologies. Because of the random-like nature of these sequences of widths, there is usually only one position at which a sequence of ring widths from a sample of oak timber with at least 70 rings will match a master. This will date the timber and, in particular, the last ring.

If the bark is still on the sample, as in Figure A1, then the date of the last ring will be the date of felling of the oak from which it was cut. There is much evidence that in medieval times oaks cut down for building purposes were used almost immediately, usually within the year or so (Rackham 1976). Hence if bark is present on several main timbers in a building, none of which appear reused or are later insertions, and if they all have the same date for their last ring, then we can be quite confident that this is the date of construction or soon after. If there is no bark on the sample, then we have to make an estimate of the felling date; how this is done is explained below.

The Practice of Tree-Ring Dating at the Nottingham Tree-Ring Dating Laboratory

1. Inspecting the Building and Sampling the Timbers. Together with a building historian the timbers in a building are inspected to try to ensure that those sampled are not reused or later insertions. Sampling is almost always done by coring into the timber, which has the great advantage that we can sample in situ timbers and those judged best to give the date of construction, or phase of construction if there is more than one in the building. The timbers to be sampled are also inspected to see how many rings they have. We normally look for timbers with at least 70 rings, and preferably more. With fewer rings than this, 50 for example, sequences of widths become difficult to match to a unique

position within a master sequence of ring widths and so are difficult to date (Litton and Zainodin 1991). The cross-section of the rafter shown in Figure A2 has about 120 rings; about 20 of which are sapwood rings – the lighter rings on the outside. Similarly the core has just over 100 rings with a few sapwood rings.

To ensure that we are getting the date of the building as a whole, or the whole of a phase of construction if there is more than one, about 8–10 samples per phase are usually taken. Sometimes we take many more, especially if the construction is complicated. One reason for taking so many samples is that, in general, some will fail to give a date. There may be many reasons why a particular sequence of ring widths from a sample of timber fails to give a date even though others from the same building do. For example, a particular tree may have grown in an odd ecological niche, so odd indeed that the widths of its rings were determined by factors other than the local climate! In such circumstances it will be impossible to date a timber from this tree using the master sequence whose widths, we can assume, were predominantly determined by the local climate at the time.

Sampling is done by coring into the timber with a hollow corer attached to an electric drill and usually from its outer rings inwards towards where the centre of the tree, the pith, is judged to be. An illustration of a core is shown in Figure A2; it is about 150mm long and 10mm diameter. Great care has to be taken to ensure that as few as possible of the outer rings are lost in coring. This can be difficult as these outer rings are often very soft (see below on sapwood). Each sample is given a code which identifies uniquely which timber it comes from, which building it is from and where the building is located. For example, CRO-A06 is the sixth core taken from the first building (A) sampled by the Laboratory in Cropwell Bishop. Where it came from in that building will be shown in the sampling records and drawings. No structural damage is done to any timbers by coring, nor does it weaken them.

During the initial inspection of the building and its timbers the dendrochronologist may come to the conclusion that, as far as can be judged, none of the timbers have sufficient rings in them for dating purposes and may advise against sampling to save further unwarranted expense.

All sampling by the Laboratory is undertaken according to current Health and Safety Standards. The Laboratory's dendrochronologists are insured.





Figure A2: Cross-section of a rafter, showing sapwood rings in the left-hand corner, the arrow points to the heartwood/sapwood boundary (H/S); and a core with sapwood; again the arrow is pointing to the H/S. The core is about the size of a pencil

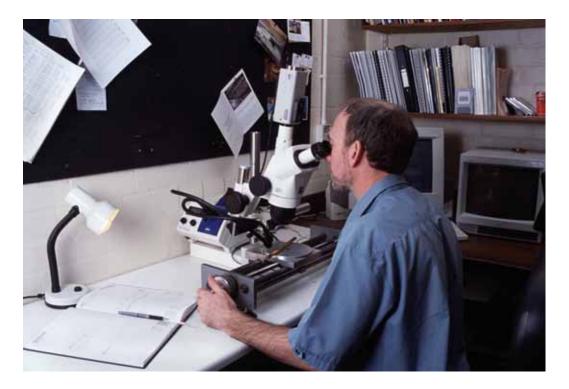


Figure A3: Measuring ring widths under a microscope. The microscope is fixed while the sample is on a moving platform. The total sequence of widths is measured twice to ensure that an error has not been made. This type of apparatus is needed to process a large number of samples on a regular basis



Figure A4: Three cores from timbers in a building. They come from trees growing at the same time. Notice that, although the sequences of widths look similar, they are not identical. This is typical

2. Measuring Ring Widths. Each core is sanded down with a belt sander using medium-grit paper and then finished by hand with flourgrade-grit paper. The rings are then clearly visible and differentiated from each other with a result very much like that shown in Figure A2. The core is then mounted on a movable table below a microscope and the ring-widths measured individually from the innermost ring to the outermost. The widths are automatically recorded in a computer file as they are measured (see Fig A3).

3. Cross-Matching and Dating the Samples. Because of the factors besides the local climate which may determine the annual widths of a tree's rings, no two sequences of ring widths from different oaks growing at the same time are exactly alike (Fig A4). Indeed, the sequences may not be exactly alike even when the trees are growing near to each other. Consequently, in the Laboratory we do not attempt to match two sequences of ring widths by eye, or graphically, or by any other subjective method. Instead, it is done objectively (ie statistically) on a computer by a process called cross-matching. The output from the computer tells us the extent of correlation between two sample sequences of widths or, if we are dating, between a sample sequence of widths and the master, at each relative position of one to the other (offsets). The extent of the correlation at an offset is determined by the *t*-value (defined in almost any introductory book on statistics). That offset with the maximum *t*-value among the *t*-values at all the offsets will be the best candidate for dating one sequence relative to the other. If one of these is a master chronology, then this will date the other. Experiments carried out in the past with sequences from oaks of known date suggest that a *t*-value of at least 4.5, and preferably at least 5.0, is usually adequate for the dating to be accepted with reasonable confidence (Laxton and Litton 1988; Laxton et al 1988; Howard et al 1984–1995).

This is illustrated in Figure A5 with timbers from one of the roofs of Lincoln Cathedral. Here four sequences of ring widths, LIN-C04, 05, 08, and 45, have been cross-matched with each other. The ring widths themselves have been omitted in the bar diagram, as is usual, but the offsets at which they best cross-match each other are shown; eg the sequence of ring widths of C08 matches the sequence of ring widths of C45 best when it is at a position starting 20 rings after the first ring of C45, and similarly for the others. The actual *t*-values between the four at these offsets of best correlations are in the matrix. Thus at the offset of +20 rings, the *t*-value between C45 and C08 is 5.6 and is the maximum found between these two among all the positions of one sequence relative to the other.

It is standard practice in our Laboratory first to cross-match as many as possible of the ring-width sequences of the samples in a building and then to form an average from them. This average is called a site sequence of the building being dated and is illustrated in Figure A5. The fifth bar at the bottom is a site sequence for a roof at Lincoln Cathedral and is constructed from the matching sequences of the four timbers. The site sequence width for each year is the average of the widths in each of the sample sequences which has a width for that year. Thus in Fig A5 if the widths shown are 0.8mm for C45, 0.2mm for C08, 0.7mm for C05, and 0.3mm for C04, then the corresponding width of the site

sequence is the average of these, 0.55mm. The actual sequence of widths of this site sequence is stored on the computer. The reason for creating site sequences is that it is usually easier to date an average sequence of ring widths with a master sequence than it is to date the individual component sample sequences separately.

The straightforward method of cross-matching several sample sequences with each other one at a time is called the 'maximal *t*-value' method. The actual method of cross-matching a group of sequences of ring-widths used in the Laboratory involves grouping and averaging the ring-width sequences and is called the 'Litton-Zainodin Grouping Procedure'. It is a modification of the straightforward method and was successfully developed and tested in the Laboratory and has been published (Litton and Zainodin 1991; Laxton *et al* 1988).

4. Estimating the Felling Date. As mentioned above, if the bark is present on a sample, then the date of its last ring is the date of the felling of its tree (or the last full year before felling, if it was felled in the first three months of the following calendar year, before any new growth had started, but this is not too important a consideration in most cases). The actual bark may not be present on a timber in a building, though the dendrochronologist who is sampling can often see from its surface that only the bark is missing. In these cases the date of the last ring is still the date of felling.

Quite often some, though not all, of the original outer rings are missing on a timber. The outer rings on an oak, called sapwood rings, are usually lighter than the inner rings, the heartwood, and so are relatively easy to identify. For example, sapwood can be seen in the corner of the rafter and at the outer end of the core in Figure A2, both indicated by arrows. More importantly for dendrochronology, the sapwood is relatively soft and so liable to insect attack and wear and tear. The builder, therefore, may remove some of the sapwood for precisely these reasons. Nevertheless, if at least some of the sapwood rings are left on a sample, we will know that not too many rings have been lost since felling so that the date of the last ring on the sample is only a few years before the date of the original last ring on the tree, and so to the date of felling.

Various estimates have been made and used for the average number of sapwood rings in mature oak trees (English Heritage 1998). A fairly conservative range is between 15 and 50 and that this holds for 95% of mature oaks. This means, of course, that in a small number of cases there could be fewer than 15 and more than 50 sapwood rings. For example, the core CRO-A06 has only 9 sapwood rings and some have obviously been lost over time – either they were removed originally by the carpenter and/or they rotted away in the building and/or they were lost in the coring. It is not known exactly how many sapwood rings are missing, but using the above range the Laboratory would estimate between a minimum of 6 (=15-9) and a maximum of 41 (=50-9). If the last ring of CRO-A06 has been dated to 1500, say, then the estimated felling-date range for the tree from which it came originally would be between 1506 and 1541. The Laboratory uses this estimate for sapwood in areas of England where it has no prior information. It

also uses it when dealing with samples with very many rings, about 120 to the last heartwood ring. But in other areas of England where the Laboratory has accumulated a number of samples with complete sapwood, that is, no sapwood lost since felling, other estimates in place of the conservative range of 15 to 50 are used. In the East Midlands (Laxton *et al* 2001) and the east to the south down to Kent (Pearson 1995) where it has sampled extensively in the past, the Laboratory uses the shorter estimate of 15 to 35 sapwood rings in 95% of mature oaks growing in these parts. Since the sample CRO-A06 comes from a house in Cropwell Bishop in the East Midlands, a better estimate of sapwood rings lost since felling is between a minimum of 6 (=15-9) and 26 (=35-9) and the felling would be estimated to have taken place between 1506 and 1526, a shorter period than before. Oak boards quite often come from the Baltic region and in these cases the 95% confidence limits for sapwood are 9 to 36 (Howard *et al* 1992, 56).

Even more precise estimates of the felling date and range can often be obtained using knowledge of a particular case and information gathered at the time of sampling. For example, at the time of sampling the dendrochronologist may have noted that the timber from which the core of Figure A2 was taken still had complete sapwood but that some of the soft sapwood rings were lost in coring. By measuring into the timber the depth of sapwood lost, say 20mm, a reasonable estimate can be made of the number of sapwood rings lost, say 12 to 15 rings in this case. By adding on 12 to 15 years to the date of the last ring on the sample a good tight estimate for the range of the felling date can be obtained, which is often better than the 15 to 35 years later we would have estimated without this observation. In the example, the felling is now estimated to have taken place between AD 1512 and 1515, which is much more precise than without this extra information.

Even if all the sapwood rings are missing on a sample, but none of the heartwood rings are, then an estimate of the felling-date range is possible by adding on the full compliment of, say, 15 to 35 years to the date of the last heartwood ring (called the heartwood/ sapwood boundary or transition ring and denoted H/S). Fortunately it is often easy for a trained dendrochronologist to identify this boundary on a timber. If a timber does not have its heartwood/sapwood boundary, then only a post quem date for felling is possible.

5. Estimating the Date of Construction. There is a considerable body of evidence collected by dendrochronologists over the years that oak timbers used in buildings were not seasoned in medieval or early modern times (English Heritage 1998; Miles 1997, 50–5). Hence, provided that all the samples in a building have estimated felling-date ranges broadly in agreement with each other, so that they appear to have been felled as a group, then this should give an accurate estimate of the period when the structure was built, or soon after (Laxton *et al* 2001, fig 8; 34–5, where 'associated groups of fellings' are discussed in detail). However, if there is any evidence of storage before use, or if there is evidence the oak came from abroad (eg Baltic boards), then some allowance has to be made for this.

6. Master Chronological Sequences. Ultimately, to date a sequence of ring widths, or a site sequence, we need a master sequence of dated ring widths with which to crossmatch it, a Master Chronology. To construct such a sequence we have to start with a sequence of widths whose dates are known and this means beginning with a sequence from an oak tree whose date of felling is known. In Figure A6 such a sequence is SHE-T, which came from a tree in Sherwood Forest which was blown down in a recent gale. After this other sequences which cross-match with it are added and gradually the sequence is 'pushed back in time' as far as the age of samples will allow. This process is illustrated in Figure A6. We have a master chronological sequence of widths for Nottinghamshire and East Midlands oak for each year from AD 882 to 1981. It is described in great detail in Laxton and Litton (1988), but the components it contains are shown here in the form of a bar diagram. As can be seen, it is well replicated in that for each year in this period there are several sample sequences having widths for that year. The master is the average of these. This master can now be used to date oak from this area and from the surrounding areas where the climate is very similar to that in the East Midlands. The Laboratory has also constructed a master for Kent (Laxton and Litton 1989). The method the Laboratory uses to construct a master sequence, such as the East Midlands and Kent, is completely objective and uses the Litton-Zainodin grouping procedure (Laxton et al 1988). Other laboratories and individuals have constructed masters for other areas and have made them available. As well as these masters, local (dated) site chronologies can be used to date other buildings from nearby. The Laboratory has hundreds of these site sequences from many parts of England and Wales covering many short periods.

7. Ring-Width Indices. Tree-ring dating can be done by cross-matching the ring widths themselves, as described above. However, it is advantageous to modify the widths first. Because different trees grow at different rates and because a young oak grows in a different way from an older oak, irrespective of the climate, the widths are first standardized before any matching between them is attempted. These standard widths are known as ring-width indices and were first used in dendrochronology by Baillie and Pilcher (1973). The exact form they take is explained in this paper and in the appendix of Laxton and Litton (1988) and is illustrated in the graphs in Figure A7. Here ring-widths are plotted vertically, one for each year of growth. In the upper sequence of (a), the generally large early growth after 1810 is very apparent as is the smaller later growth from about 1900 onwards when the tree is maturing. A similar phenomenon can be observed in the lower sequence of (a) starting in 1835. In both the widths are also changing rapidly from year to year. The peaks are the wide rings and the troughs are the narrow rings corresponding to good and poor growing seasons, respectively. The two corresponding sequence of Baillie-Pilcher indices are plotted in (b) where the differences in the immature and mature growths have been removed and only the rapidly changing peaks and troughs remain, that are associated with the common climatic signal. This makes cross-matching easier.

t-value/offset Matrix


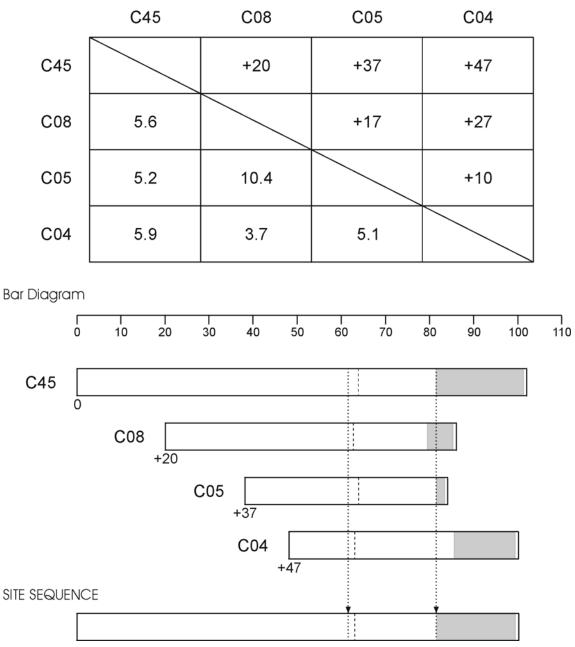



Figure A5: Cross-matching of four sequences from a Lincoln Cathedral roof and the formation of a site sequence from them


The bar diagram represents these sequences without the rings themselves. The length of the bar is proportional to the number of rings in the sequence. Here the four sequences are set at relative positions (offsets) to each other at which they have maximum correlation as measured by the *t*-values. The *t*-value/offset matrix contains the maximum *t*-values below the diagonal and the offsets above it. Thus, the maximum *t*-value between C08 and C45 occurs at the offset of +20 rings and the *t*-value is then 5.6. The site sequence is composed of the average of the corresponding widths, as illustrated with one width.

11 - 2012



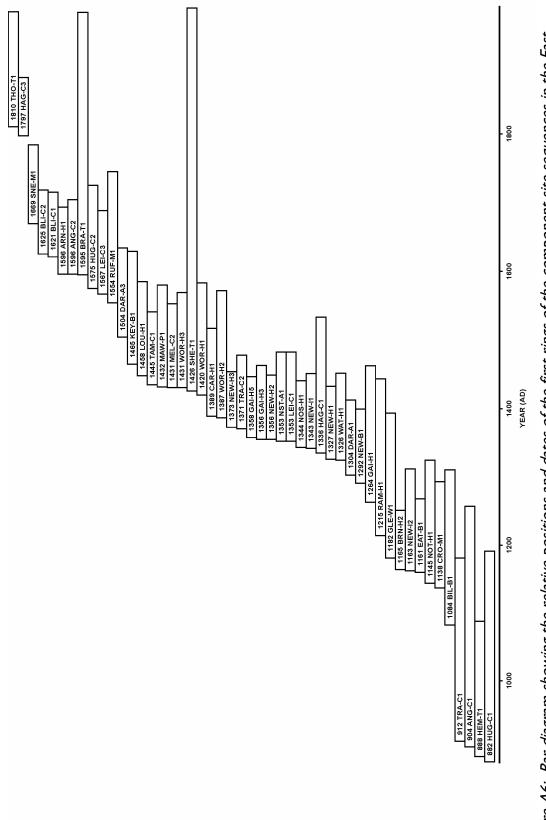

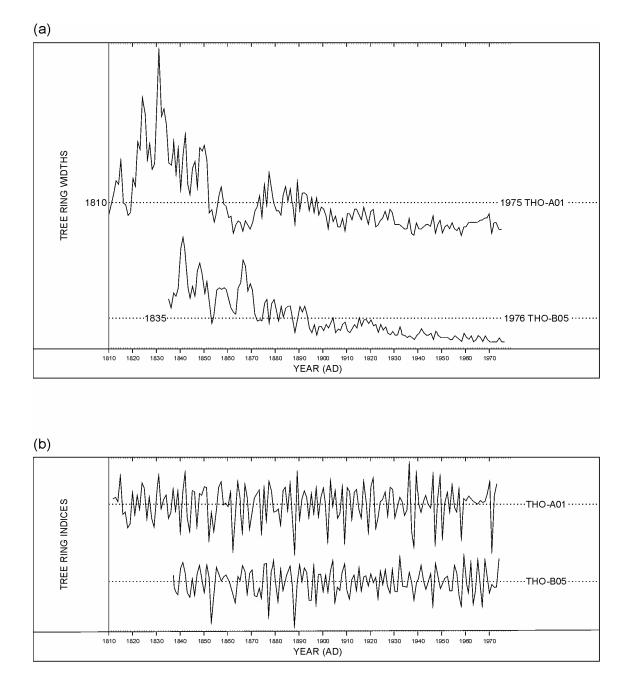



Here the ring widths are plotted vertically, one for each year, so that peaks represent wide rings and troughs narrow ones. Notice the growth-trends in each; on average the earlier rings of the young tree are wider than the later ones of the older tree in both sequences

Figure A7 (b): The Baillie-Pilcher indices of the above widths

The growth trends have been removed completely

References

Baillie, M G L, and Pilcher, J R, 1973 A simple cross-dating program for tree-ring research, Tree-Ring Bull, 33, 7–14

English Heritage, 1998 Dendrochronology: Guidelines on Producing and Interpreting Dendrochronological Dates, London

Hillam, J, Morgan, R A, and Tyers, I, 1987 Sapwood estimates and the dating of short ring sequences, Applications of tree-ring studies, BAR Int Ser, 3, 165–85

Howard, R E, Laxton, R R, Litton, C D, and Simpson, W G, 1984–95 Nottingham University Tree-Ring Dating Laboratory results, Vernacular Architect, 15–26

Hughes, M K, Milson, S J, and Legett, P A, 1981 Sapwood estimates in the interpretation of tree-ring dates, J Archaeol Sci, 8, 381–90

Laxon, R R, Litton, C D, and Zainodin, H J, 1988 An objective method for forming a master ring-width sequence, P A C T, 22, 25–35

Laxton, R R, and Litton, C D, 1988 An East Midlands Master Chronology and its use for dating vernacular buildings, University of Nottingham, Department of Archaeology Publication, Monograph Series III

Laxton, R R, and Litton, C D, 1989 Construction of a Kent master dendrochronological sequence for oak, AD 1158 to 1540, Medieval Archaeol, 33, 90–8

Laxton, R R, Litton, C D, and Howard, R E, 2001 Timber: Dendrochronology of Roof Timbers at Lincoln Cathedral, Engl Heritage Res Trans, 7

Litton, C D, and Zainodin, H J, 1991 Statistical models of dendrochronology, J Archaeol Sci, 18, 29–40

Miles, D W H, 1997 The interpretation, presentation and use of tree-ring dates, Vernacular Architect, 28, 40–56

Pearson, S, 1995 The Medieval Houses of Kent, an Historical Analysis, London

Rackham, O, 1976 Trees and Woodland in the British Landscape, London



ENGLISH HERITAGE RESEARCH AND THE HISTORIC ENVIRONMENT

English Heritage undertakes and commissions research into the historic environment, and the issues that affect its condition and survival, in order to provide the understanding necessary for informed policy and decision making, for the protection and sustainable management of the resource, and to promote the widest access, appreciation and enjoyment of our heritage. Much of this work is conceived and implemented in the context of the National Heritage Protection Plan. For more information on the NHPP please go to http://www.english-heritage. org.uk/professional/protection/national-heritage-protection-plan/.

The Heritage Protection Department provides English Heritage with this capacity in the fields of building history, archaeology, archaeological science, imaging and visualisation, landscape history, and remote sensing. It brings together four teams with complementary investigative, analytical and technical skills to provide integrated applied research expertise across the range of the historic environment. These are:

- * Intervention and Analysis (including Archaeology Projects, Archives, Environmental Studies, Archaeological Conservation and Technology, and Scientific Dating)
- * Assessment (including Archaeological and Architectural Investigation, the Blue Plaques Team and the Survey of London)
- * Imaging and Visualisation (including Technical Survey, Graphics and Photography)
- * Remote Sensing (including Mapping, Photogrammetry and Geophysics)

The Heritage Protection Department undertakes a wide range of investigative and analytical projects, and provides quality assurance and management support for externally-commissioned research. We aim for innovative work of the highest quality which will set agendas and standards for the historic environment sector. In support of this, and to build capacity and promote best practice in the sector, we also publish guidance and provide advice and training. We support community engagement and build this in to our projects and programmes wherever possible.

We make the results of our work available through the Research Report Series, and through journal publications and monographs. Our newsletter *Research News*, which appears twice a year, aims to keep our partners within and outside English Heritage up-to-date with our projects and activities.

A full list of Research Reports, with abstracts and information on how to obtain copies, may be found on www.english-heritage.org.uk/researchreports

For further information visit www.english-heritage.org.uk

