

# GEOPHYSICAL SURVEY REPORT

# sumo

Survey

**GEOPHYSICS FOR  
ARCHAEOLOGY &  
ENGINEERING**

## **St Congar's Cohousing Project, Congresbury, North Somerset**

Client

**CgMs Heritage (part of RPS)**

On behalf of

**St Congar's Community  
Cohousing Limited**

Survey Report

**12965**

Date

**June 2018**

SUMO Geophysics Ltd  
Cowburn Farm  
Market Street  
Thornton  
Bradford  
BD13 3HW  
T: 01274 835016

SUMO Geophysics Ltd  
Vineyard House  
Upper Hook Road  
Upton upon Severn  
Worcestershire  
WR8 0SA  
T: 01684 592266

[geophysics@sumoservices.com](mailto:geophysics@sumoservices.com)  
[www.sumoservices.com](http://www.sumoservices.com)

## GEOPHYSICAL SURVEY REPORT

Project name:  
**St Congar's Cohousing Project,  
Congresbury, North Somerset**

SUMO Job reference:  
**12965**

Client:  
**CgMs Heritage (part of RPS)**  
For:  
**St Congar's Community Cohousing  
Limited**

Survey date:  
**20 June 2018**

Report date:  
**29 June 2018**

Field co-ordinator:  
**Andrew Bateman** BA

Field Team:  
**Chris Osborne** MSc

Report written by:  
**Rebecca Davies** BSc

CAD illustrations by:  
**Rebecca Davies** BSc

Project Manager:  
**Simon Haddrell** BEng AMBCS PCIfA

Report approved by:  
**Dr John Gater** BSc DSc(Hon) MCIfA FSA  
**Jon Tanner** BSc MSc PCIfA

## TABLE OF CONTENTS

1	SUMMARY OF RESULTS	1
2	INTRODUCTION	1
3	METHODS, PROCESSING & PRESENTATION	2
4	RESULTS	3
5	DATA APPRAISAL & CONFIDENCE ASSESSMENT	3
6	CONCLUSION	4
7	REFERENCES	4

Appendix A Technical Information: Magnetometer Survey Method

Appendix B Technical Information: Magnetic Theory

## LIST OF FIGURES

Figure 01	1:25 000	Site Location Diagram
Figure 02	1:750	Location of Survey Area
Figure 03	1:750	Magnetometer Survey - Greyscale Plot & Interpretation
Figure 04	1:750	Minimally Processed Data – Greyscale Plot

## 1 SUMMARY OF RESULTS

A detailed magnetometer survey was conducted over approximately 0.2ha of grassland at Congresbury, North Somerset. A curvilinear anomaly of possible archaeological origin has been identified, along with an additional linear response and discrete anomalies of uncertain origin. An underground service has also been mapped.

## 2 INTRODUCTION

### 2.1 Background synopsis

**SUMO Geophysics Ltd** were commissioned to undertake a geophysical survey of an area outlined for residential development. This survey forms part of an archaeological investigation being undertaken by **CgMs Heritage (part of RPS)** on behalf of **St Congar's Community Cohousing Limited**.

### 2.2 Site details

<b>NGR / Postcode</b>	ST 435 638 / BS49 5DZ
<b>Location</b>	The survey area is located to the north-west of Congresbury, North Somerset. The car park of St Andrew's Church bounds the site to the south-east, with St Andrew's Primary School to the west.
<b>HER/SMR</b>	North Somerset
<b>Unitary Authority</b>	North Somerset
<b>Parish</b>	Congresbury CP
<b>Topography</b>	The site occupies a slight knoll of outcropping Mercia Mudstone at a height of c.8m AOD (CgMs 2017).
<b>Current Land Use</b>	Grassland
<b>Geology</b>	Solid: Mercia Mudstone Group - mudstone and halite-stone. Superficial: none recorded (BGS 2018).
<b>Soils</b>	Newchurch 2 Association (814c) - deep stoneless mainly calcareous soils (SSEW 1983).
<b>Archaeology</b>	Previous geophysical survey conducted by the Yatton, Congresbury, Claverham and Cleeve Archaeological Research Team (YCCCART) to the north-east of the study site in the orchard and prayer garden of the Refectory revealed anomalies interpreted to reflect walls. Further geophysical evaluation of areas to the east of the site identified a buried service and a linear anomaly interpreted as a ditch. Geophysical work on a school playing field, c.80m south of the site (HER. ENS1501) revealed a 'circular feature' though its origin is unclear. Approximately 30m to the south of the site, targeted excavations carried out by YCCCART (HER. ENS1666) revealed a layer of stone and rubble, and the discovery of Roman roof tiles and pottery was interpreted to indicate the presence of a Roman site within the vicinity (CgMs 2017).
<b>Survey Methods</b>	Magnetometer survey (fluxgate gradiometer)
<b>Study Area</b>	0.4 ha - approximately 0.2ha could not be surveyed due to overgrown vegetation and a car park.

### 2.3 Aims and Objectives

To locate and characterise any anomalies of possible archaeological interest within the study area.

### 3 METHODS, PROCESSING & PRESENTATION

#### 3.1 Standards & Guidance

This report and all fieldwork have been conducted in accordance with the latest guidance documents issued by Historic England (EH 2008) (then English Heritage), the Chartered Institute for Archaeologists (CIfA 2014) and the European Archaeological Council (EAC 2016).

#### 3.2 Survey methods

Detailed magnetic survey was chosen as an efficient and effective method of locating archaeological anomalies.

Technique	Instrument	Traverse Interval	Sample Interval
Magnetometer	Bartington Grad 601-2	1.0m	0.25m

More information regarding this technique is included in Appendix A and B.

#### 3.3 Data Processing

The following basic processing steps have been carried out on the data used in this report:  
De-stripe; de-stagger; interpolate

#### 3.4 Presentation of results and interpretation

The presentation of the results includes a 'minimally processed data' and a 'processed data' greyscale plot. Magnetic anomalies are identified, interpreted and plotted onto the 'Interpretation' drawings.

When interpreting the results, several factors are taken into consideration, including the nature of archaeological features being investigated and the local conditions at the site (geology, pedology, topography etc.). Anomalies are categorised by their potential origin. Where responses can be related to other existing evidence, the anomalies will be given specific categories, such as: *Abbey Wall* or *Roman Road*. Where the interpretation is based largely on the geophysical data, levels of confidence are implied, for example: *Probable*, or *Possible Archaeology*. The former is used for a confident interpretation, based on anomaly definition and/or other corroborative data such as cropmarks. Poor anomaly definition, a lack of clear patterns to the responses and an absence of other supporting data reduces confidence, hence the classification *Possible*.

## 4 RESULTS

### 4.1 *Probable Archaeology*

- 4.1.1 No magnetic responses have been recorded that could be confidently interpreted as being of archaeological interest.

### 4.2 *Possible Archaeology*

- 4.2.1 A positive curvilinear anomaly can be seen in the data, and is typical of the sort of response associated with a cut feature, such as a ditch. Given that other ditch-type features have been detected in previous geophysical surveys within close proximity of the site (CgMs 2017) an archaeological origin is possible.

### 4.3 *Uncertain*

- 4.3.1 Small discrete positive anomalies and a weak linear trend have been identified in the southern part of the site and are of uncertain origin. The linear response could be associated with another ditch-like feature and the discrete anomalies could be a result of pitting. However, these interpretations are tentative at best and the responses could simply be natural or modern.

### 4.4 *Ferrous / Magnetic Disturbance*

- 4.4.1 A strong bipolar linear anomaly in the north-east of the site is likely to be associated with an underground service, such as a pipe or cable.
- 4.4.2 A linear series of discrete ferrous responses is likely to be of modern origin, and probably relates to a former fence-line or possible service.
- 4.4.3 Ferrous responses close to boundaries are due to adjacent fences and gates. Smaller scale ferrous anomalies ("iron spikes") are present throughout the data and are characteristic of small pieces of ferrous debris (or brick / tile) in the topsoil; they are commonly assigned a modern origin. Only the most prominent of these are highlighted on the interpretation diagram.

## 5 DATA APPRAISAL & CONFIDENCE ASSESSMENT

- 5.1 Historic England guidelines (EH 2008) Table 4 states that the average magnetic response on mudstone and halite-stone is poor but can be variable. The results from this survey indicate the presence of a cut feature of possible archaeological origin, along with discrete and linear anomalies of uncertain origin. It can therefore be determined that the technique has been effective; however, the high amplitude of magnetic disturbance may have the potential to mask weaker archaeological anomalies.

## 6 CONCLUSION

- 6.1 The survey at Congresbury has not revealed any anomalies of definite archaeological origin; however, a possible archaeological ditch-type feature has been identified. A further linear anomaly and discrete responses could have archaeological origins, though they are more likely to be natural or modern. The remaining responses are modern and include areas of disturbance from ferrous objects and an underground service.

## 7 REFERENCES


- BGS 2018 British Geological Survey, Geology of Britain viewer [Accessed 29/06/2018] *website:* (<http://www.bgs.ac.uk/opengeoscience/home.html?Accordion1=1#maps>)
- CgMs 2017 *Archaeological Desk-Based Assessment - St Congar's Community Cohousing, Congresbury, North Somerset.* CgMs Heritage (part of RPS); unpublished report.
- ClfA 2014 *Standard and Guidance for Archaeological Geophysical Survey.* Amended 2016. ClfA Guidance note. Chartered Institute for Archaeologists, Reading  
[http://www.archaeologists.net/sites/default/files/ClfAS%26GGeophysics\\_2.pdf](http://www.archaeologists.net/sites/default/files/ClfAS%26GGeophysics_2.pdf)
- EAC 2016 *EAC Guidelines for the Use of Geophysics in Archaeology,* European Archaeological Council, Guidelines 2.
- EH 2008 *Geophysical Survey in Archaeological Field Evaluation.* English Heritage, Swindon  
<https://content.historicengland.org.uk/images-books/publications/geophysical-survey-in-archaeological-field-evaluation/geophysics-guidelines.pdf/>
- SSEW 1983 *Soils of England and Wales. Sheet 5, South West England.* Soil Survey of England and Wales, Harpenden.





 Site Location

Reproduced from Ordnance Survey's 1:25 000 map of 1998 with the permission of the controller of Her Majesty's Stationery Office. Crown Copyright reserved. Licence No: 100018665



Title: Site Location Diagram

Client: CgMs Heritage (part of RPS)

Project: 12965 - St Congar's Co-Housing Project, Congresbury, North Somerset




Scale:  1:25000 @ A3

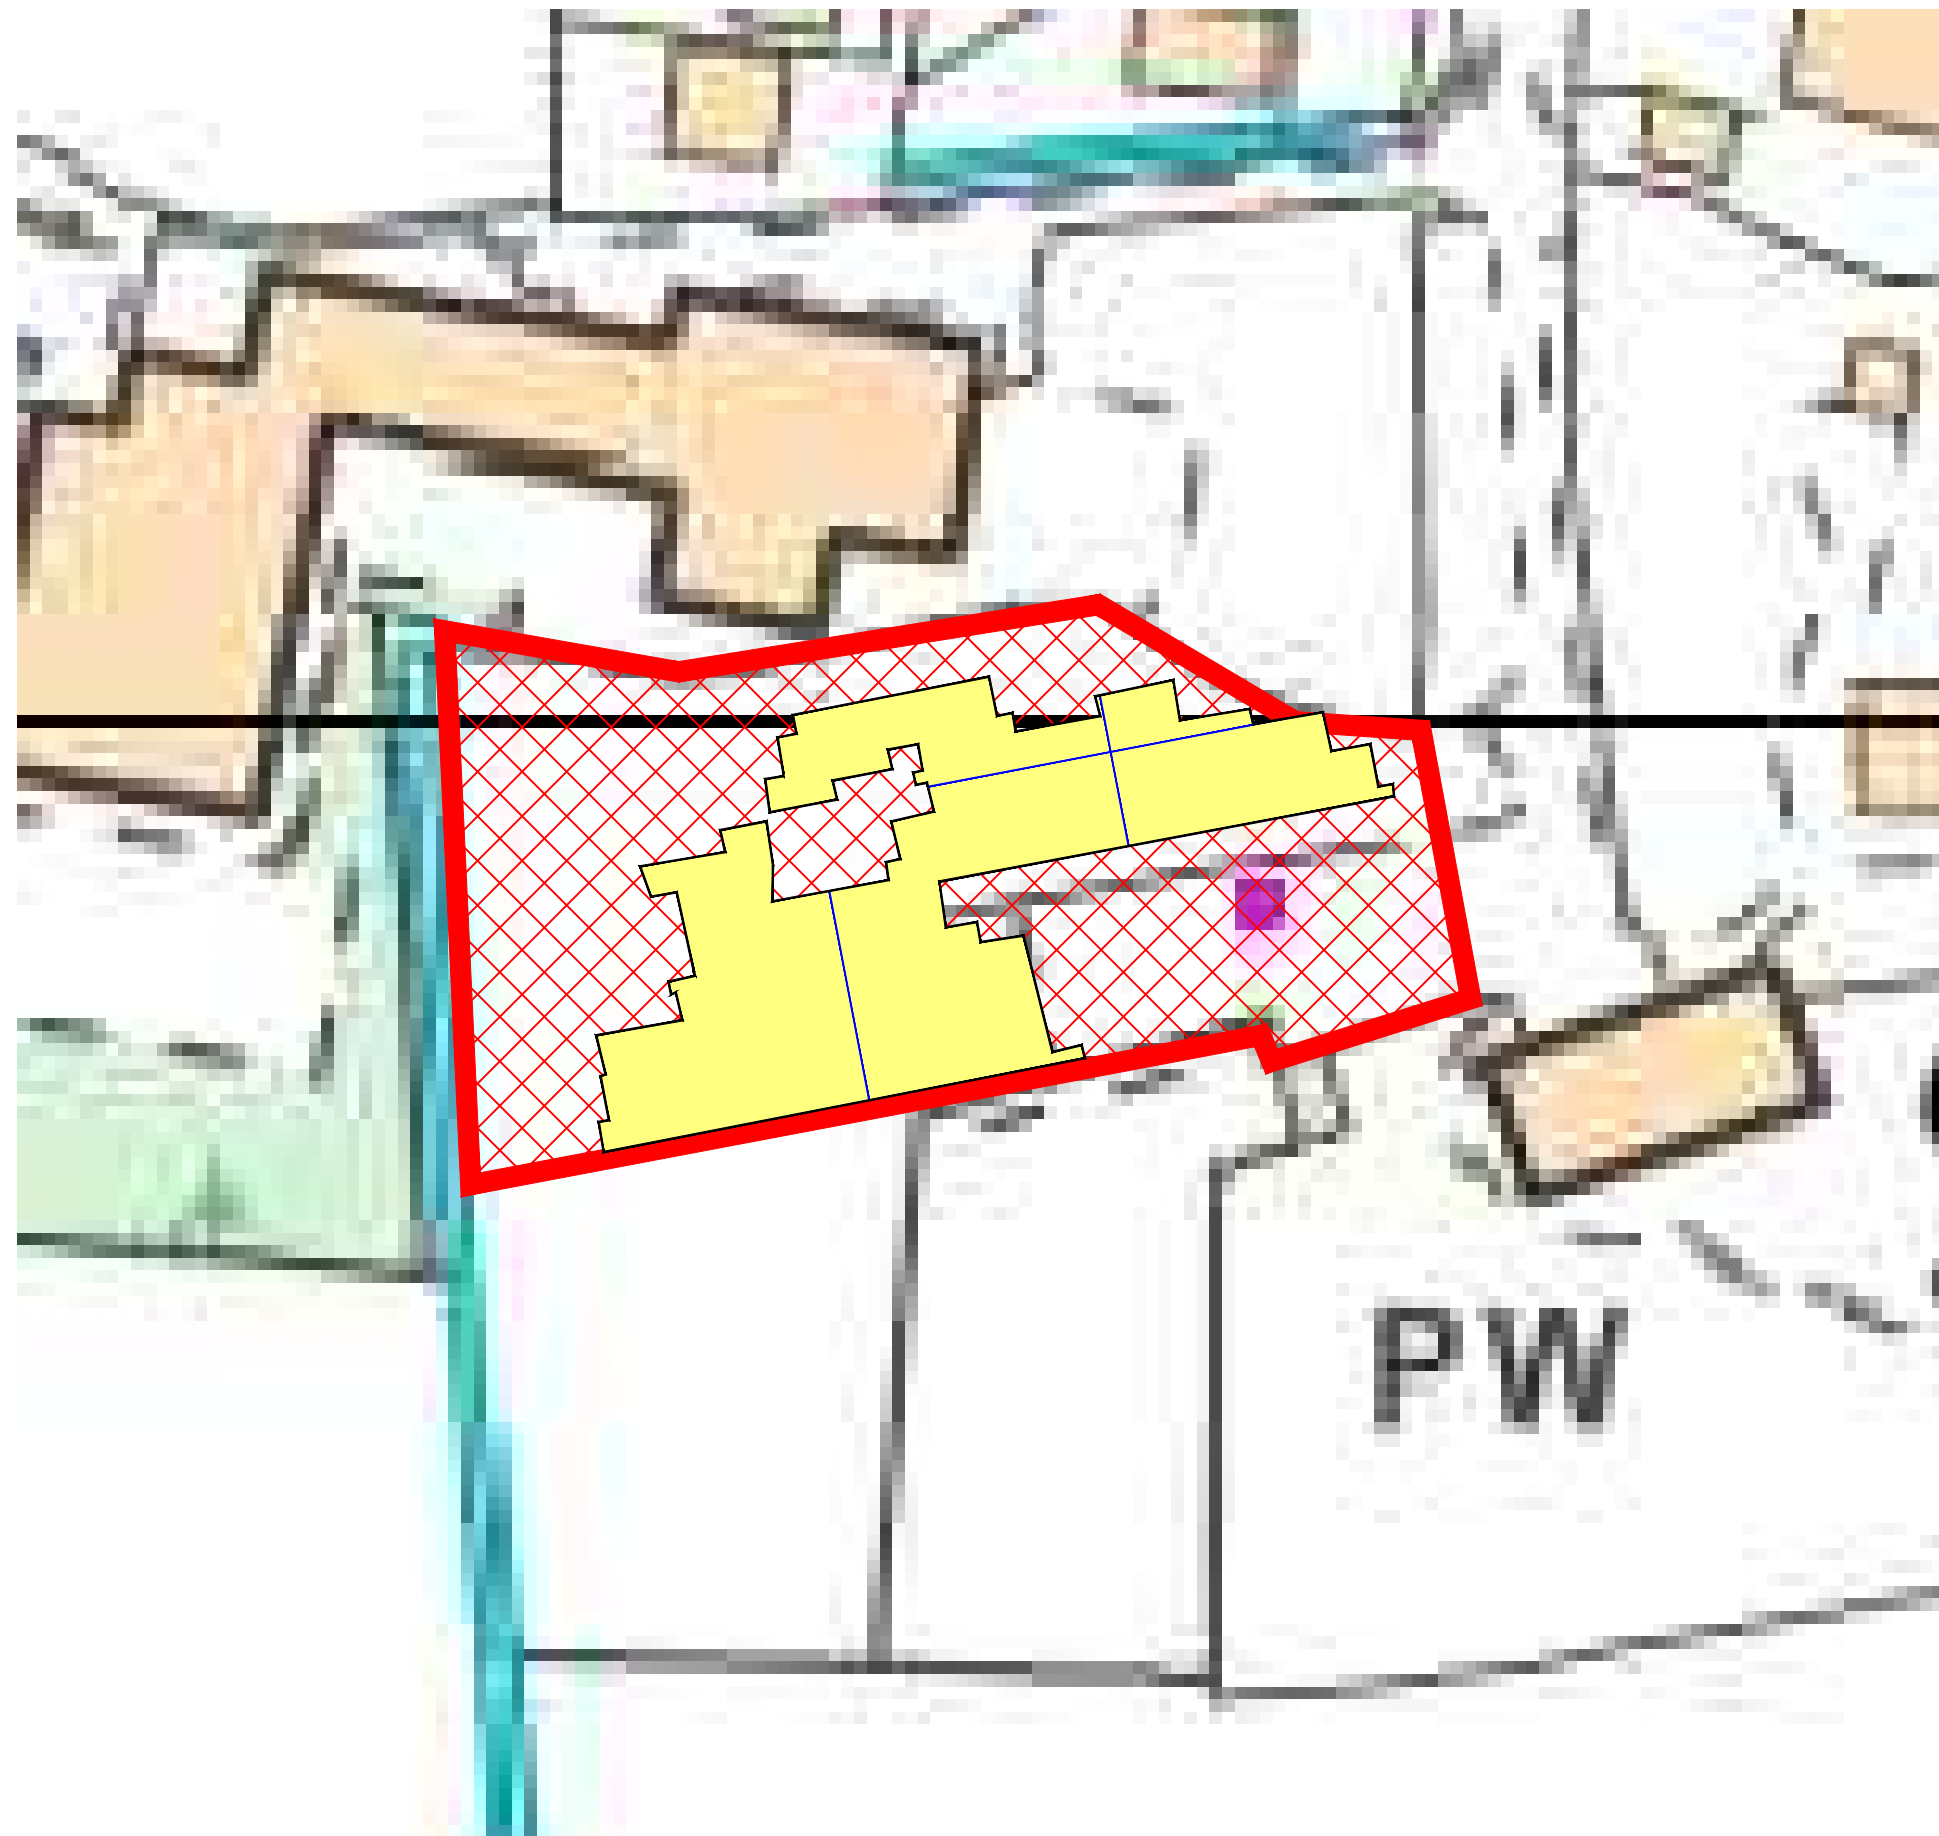Fig No: 01







	Unsurveyable - overgrown vegetation / car park
	Survey Area - showing 30m grid





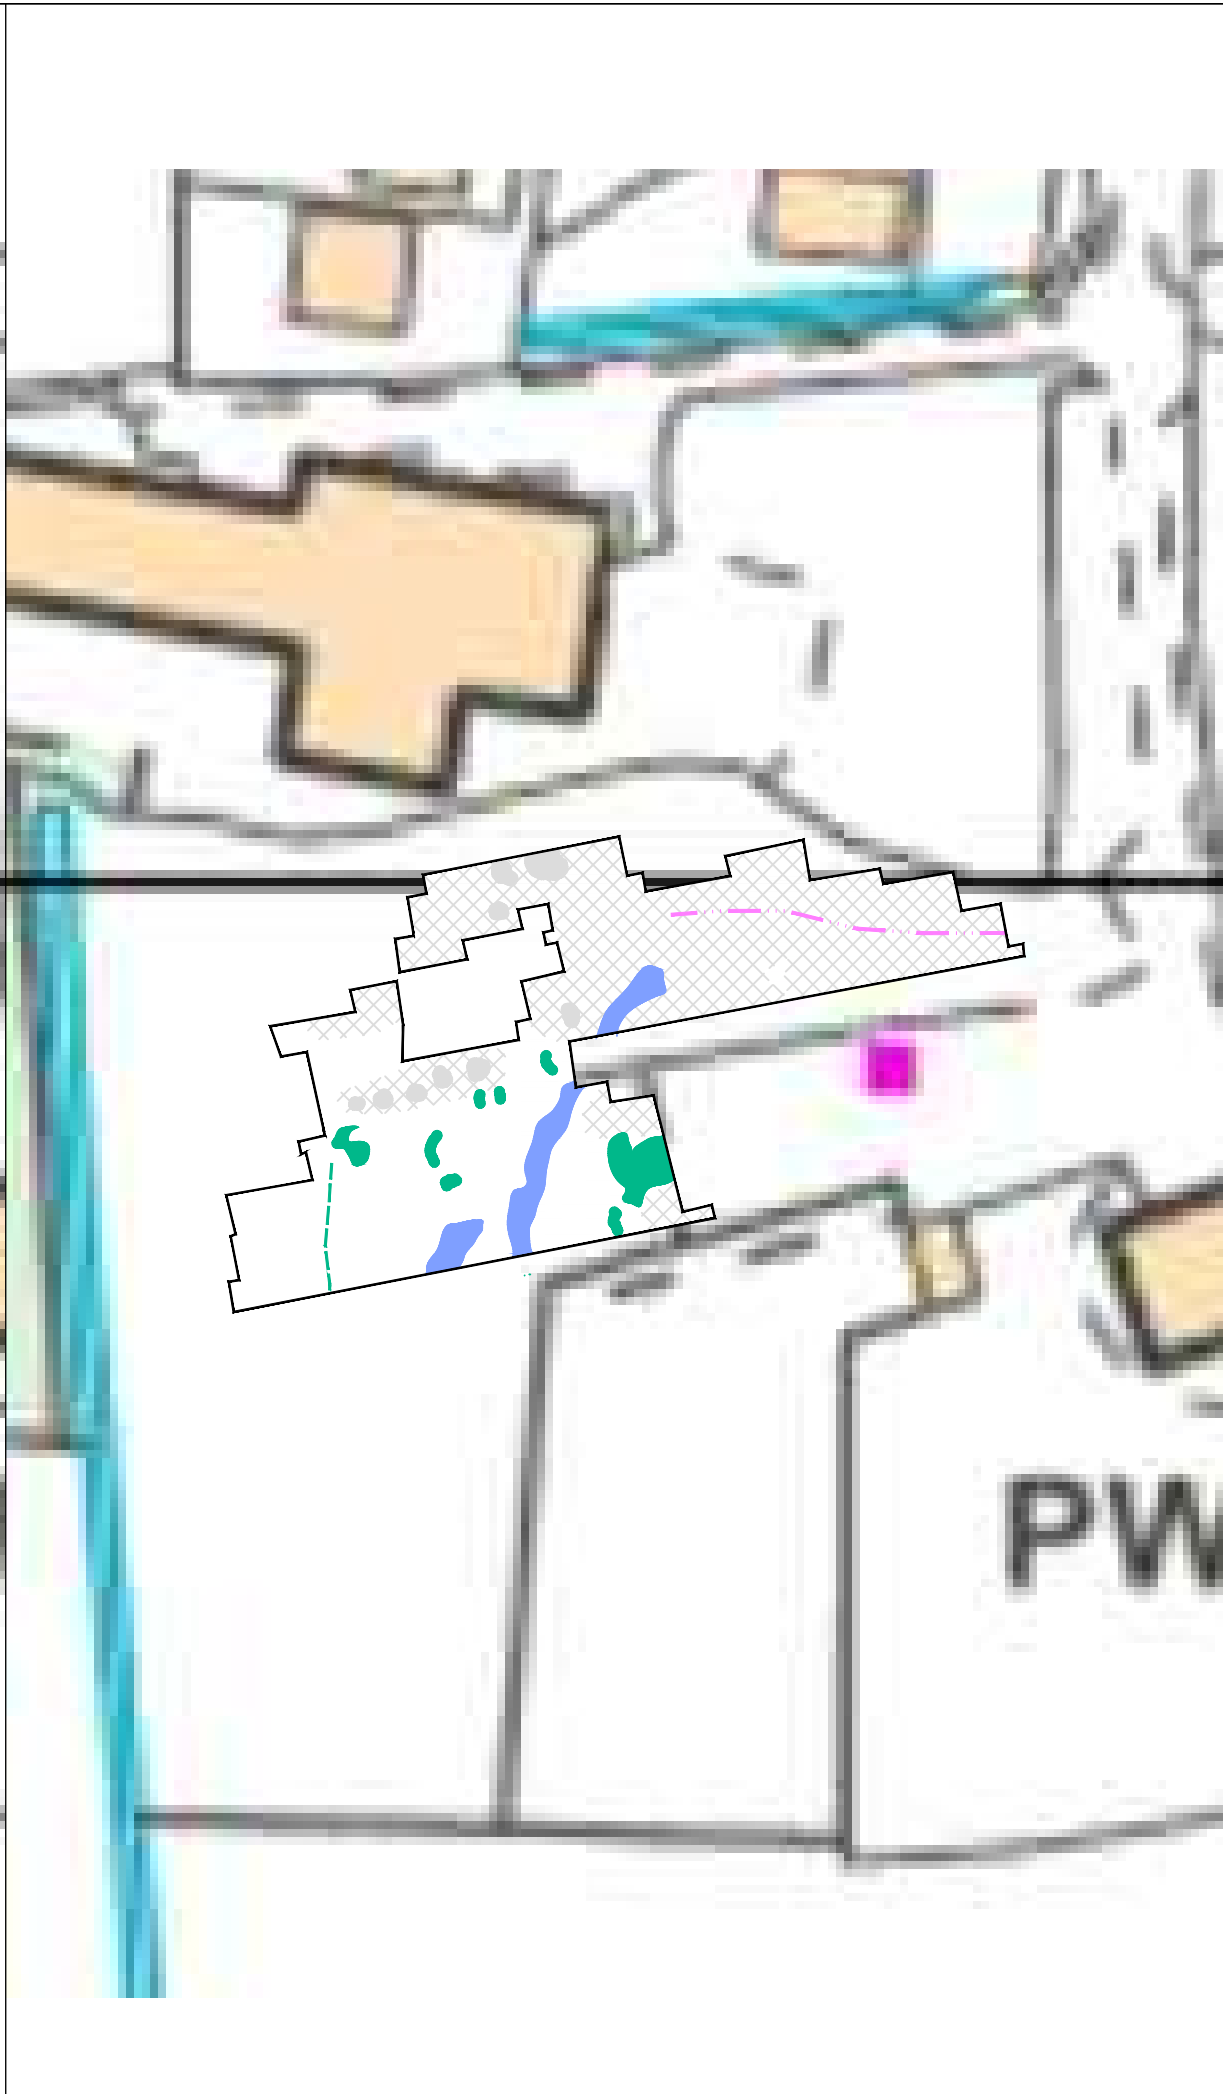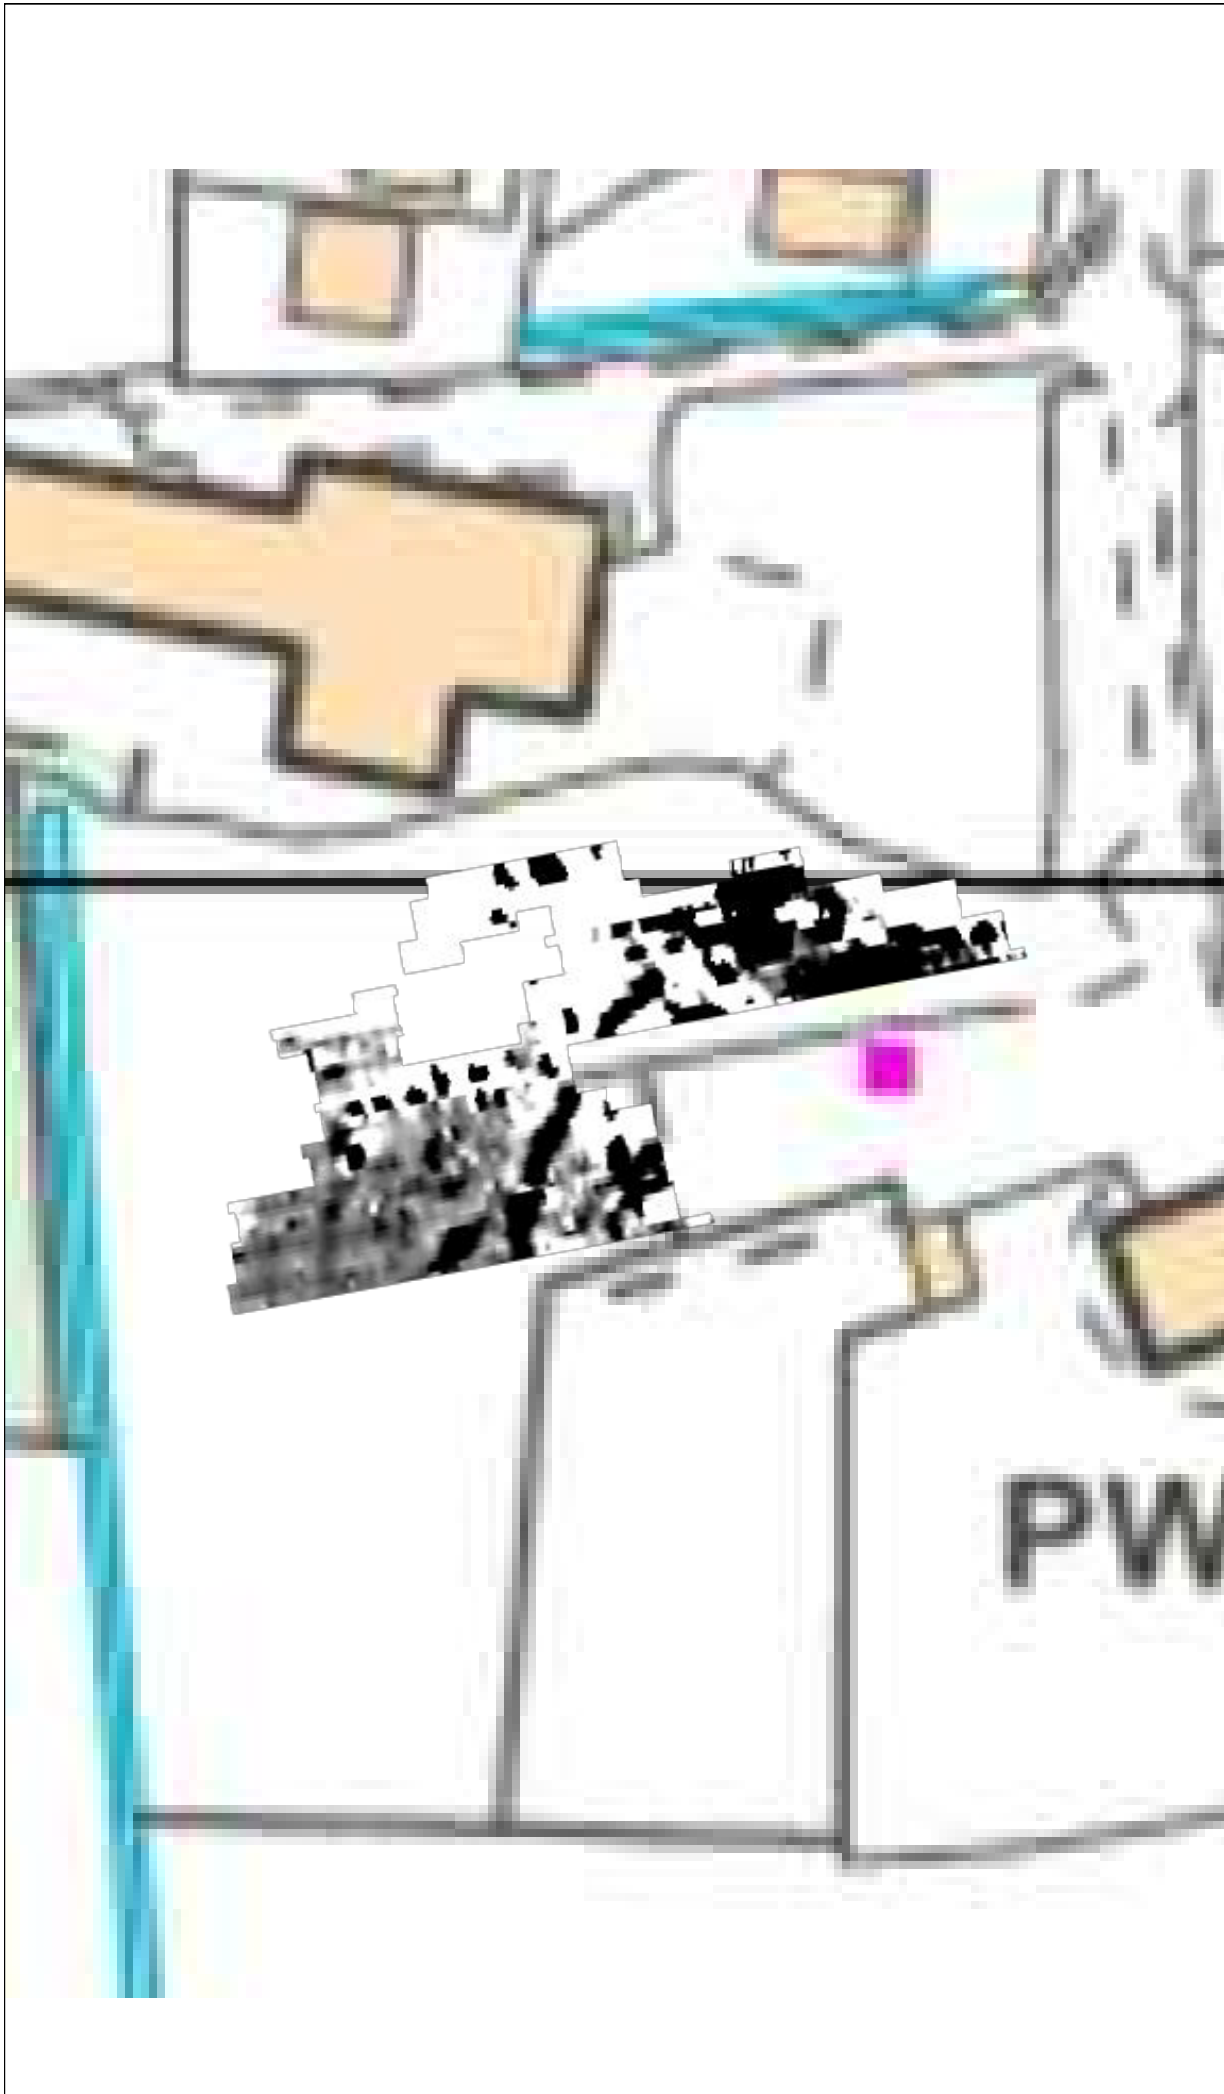



Title: Location of Survey Area
Client: CgMs Heritage (part of RPS)
Project: 12965 - St Congar's Co-Housing Project, Congresbury, North Somerset
Scale: 0 metres 37.5 1:750 @ A3

Fig No:  
02



**KEY**

	Possible archaeology
	Uncertain Origin (discrete anomaly / trend)
	Service
	Ferrous (discrete / zone)






Title: Magnetometer Survey - Greyscale Plot & Interpretation

Client: CgMs Heritage (part of RPS)

Project: 12965 - St Congar's Co-Housing Project, Congresbury, North Somerset

Scale: 0 metres 37.5  
1:750 @ A3

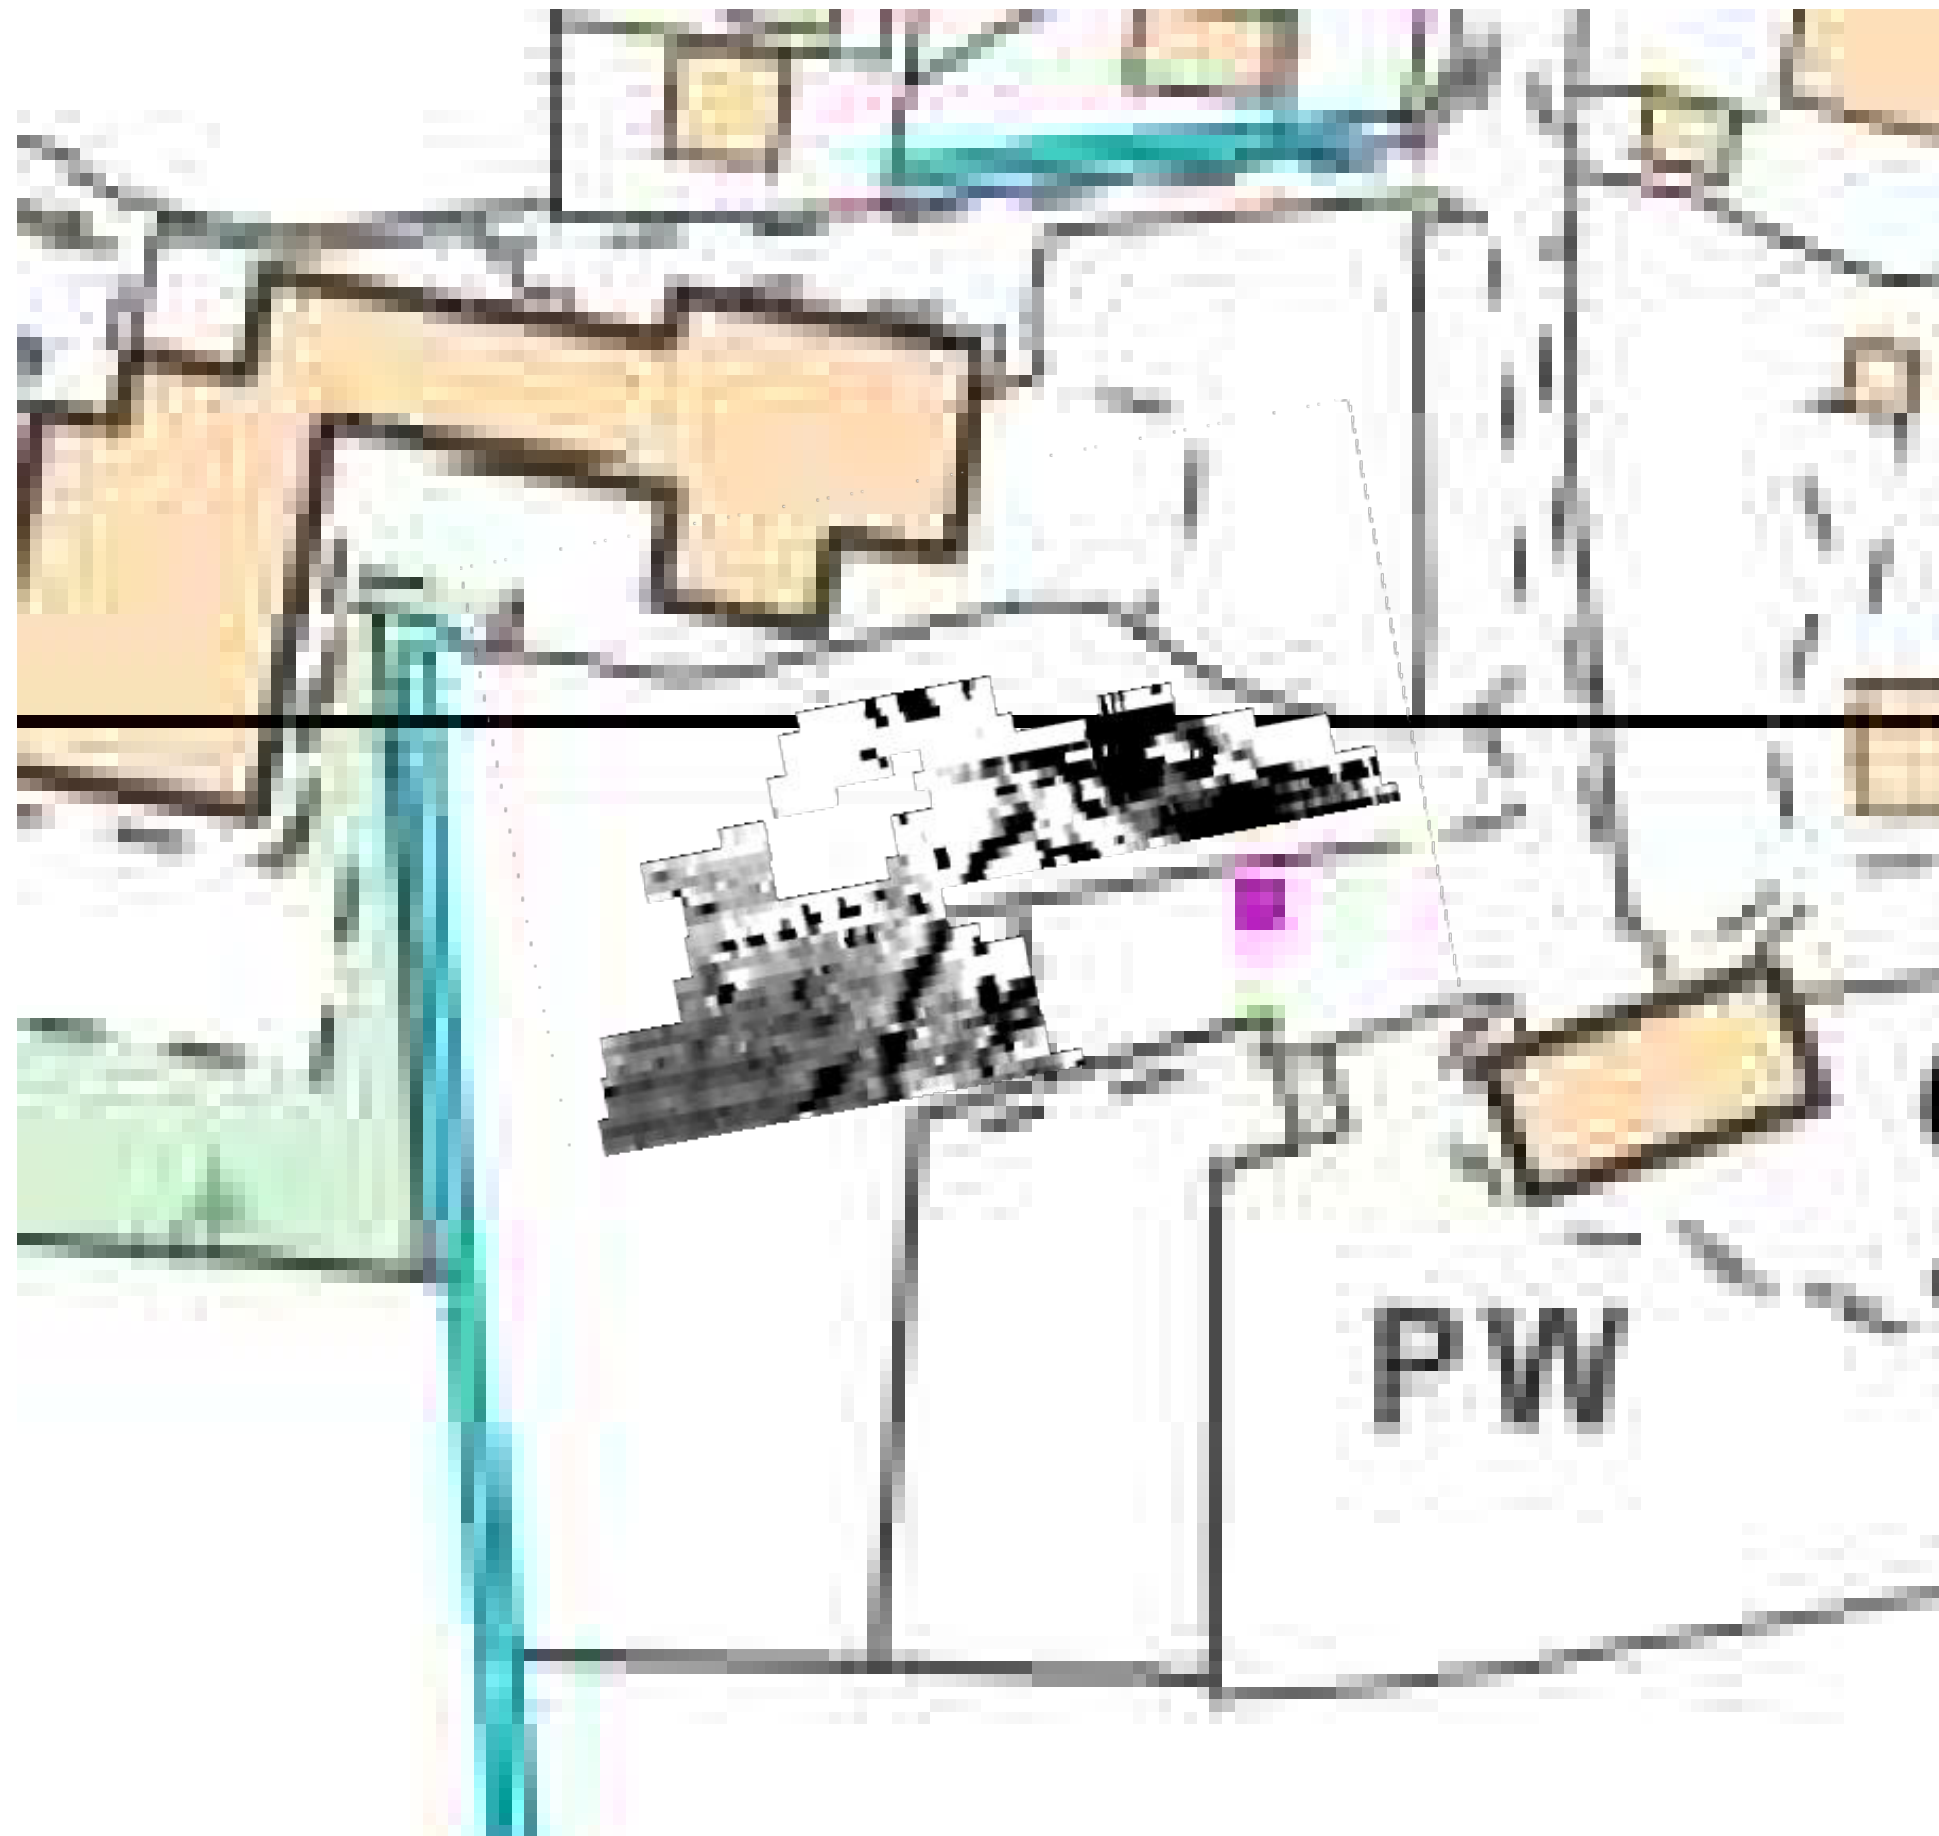Fig No: 03



Title:  
Minimally Processed Data - Greyscale Plot

Client:  
CgMs Heritage (part of RPS)

Project:  
12965 - St Congar's Co-Housing Project,  
Congresbury, North Somerset

Scale: 0 metres 37.5  
1:750 @ A3 Fig No: 04

## Appendix A - Technical Information: Magnetometer Survey Method

### Grid Positioning

For hand held gradiometers the location of the survey grids has been plotted together with the referencing information. Grids were set out using a Trimble R8 Real Time Kinematic (RTK) VRS Now GNSS GPS system.

An RTK GPS (Real-time Kinematic Global Positioning System) can locate a point on the ground to a far greater accuracy than a standard GPS unit. A standard GPS suffers from errors created by satellite orbit errors, clock errors and atmospheric interference, resulting in an accuracy of 5m-10m. An RTK system uses a single base station receiver and a number of mobile units. The base station re-broadcasts the phase of the carrier it measured, and the mobile units compare their own phase measurements with those they received from the base station. This results in an accuracy of around 0.01m.

Technique	Instrument	Traverse Interval	Sample Interval
Magnetometer	Bartington Grad 601-2	1m	0.25m

### Instrumentation: **Bartington Grad 601-2**

Bartington instruments operate in a gradiometer configuration which comprises fluxgate sensors mounted vertically, set 1.0m apart. The fluxgate gradiometer suppresses any diurnal or regional effects. The instruments are carried, or cart mounted, with the bottom sensor approximately 0.1-0.3m from the ground surface. At each survey station, the difference in the magnetic field between the two fluxgates is measured in nanoTesla (nT). The sensitivity of the instrument can be adjusted; for most archaeological surveys the most sensitive range (0.1nT) is used. Generally, features up to 1m deep may be detected by this method, though strongly magnetic objects may be visible at greater depths. The Bartington instrument can collect two lines of data per traverse with gradiometer units mounted laterally with a separation of 1.0m. The readings are logged consecutively into the data logger which in turn is daily down-loaded into a portable computer whilst on site. At the end of each site survey, data is transferred to the office for processing and presentation.

### Data Processing

Zero Mean Traverse	This process sets the background mean of each traverse within each grid to zero. The operation removes striping effects and edge discontinuities over the whole of the data set.
Step Correction (De-stagger)	When gradiometer data are collected in 'zig-zag' fashion, stepping errors can sometimes arise. These occur because of a slight difference in the speed of walking on the forward and reverse traverses. The result is a staggered effect in the data, which is particularly noticeable on linear anomalies. This process corrects these errors.

### Display

Greyscale/ Colourscale Plot	This format divides a given range of readings into a set number of classes. Each class is represented by a specific shade of grey, the intensity increasing with value. All values above the given range are allocated the same shade (maximum intensity); similarly, all values below the given range are represented by the minimum intensity shade. Similar plots can be produced in colour, either using a wide range of colours or by selecting two or three colours to represent positive and negative values. The assigned range (plotting levels) can be adjusted to emphasise different anomalies in the data-set.
--------------------------------	---

## Interpretation Categories

In certain circumstances (usually when there is corroborative evidence from desk-based or excavation data) very specific interpretations can be assigned to magnetic anomalies (for example, *Roman Road, Wall, etc.*) and where appropriate, such interpretations will be applied. The list below outlines the generic categories commonly used in the interpretation of the results.

<i>Archaeology / Probable Archaeology</i>	This term is used when the form, nature and pattern of the responses are clearly or very probably archaeological and /or if corroborative evidence is available. These anomalies, whilst considered anthropogenic, could be of any age.
<i>Possible Archaeology</i>	These anomalies exhibit either weak signal strength and / or poor definition, or form incomplete archaeological patterns, thereby reducing the level of confidence in the interpretation. Although the archaeological interpretation is favoured, they may be the result of variable soil depth, plough damage or even aliasing as a result of data collection orientation.
<i>Industrial / Burnt-Fired</i>	Strong magnetic anomalies that, due to their shape and form or the context in which they are found, suggest the presence of kilns, ovens, corn dryers, metal-working areas or hearths. It should be noted that in many instances modern ferrous material can produce similar magnetic anomalies.
<i>Former Field Boundary (probable &amp; possible)</i>	Anomalies that correspond to former boundaries indicated on historic mapping, or which are clearly a continuation of existing land divisions. Possible denotes less confidence where the anomaly may not be shown on historic mapping but nevertheless the anomaly displays all the characteristics of a field boundary.
<i>Ridge &amp; Furrow</i>	Parallel linear anomalies whose broad spacing suggests ridge and furrow cultivation. In some cases, the response may be the result of more recent agricultural activity.
<i>Agriculture (ploughing)</i>	Parallel linear anomalies or trends with a narrower spacing, sometimes aligned with existing boundaries, indicating more recent cultivation regimes.
<i>Land Drain</i>	Weakly magnetic linear anomalies, quite often appearing in series forming parallel and herringbone patterns. Smaller drains may lead and empty into larger diameter pipes, which in turn usually lead to local streams and ponds. These are indicative of clay fired land drains.
<i>Natural</i>	These responses form clear patterns in geographical zones where natural variations are known to produce significant magnetic distortions.
<i>Magnetic Disturbance</i>	Broad zones of strong dipolar anomalies, commonly found in places where modern ferrous or fired materials (e.g. brick rubble) are present. They are presumed to be modern.
<i>Service</i>	Magnetically strong anomalies, usually forming linear features are indicative of ferrous pipes/cables. Sometimes other materials (e.g. pvc) or the fill of the trench can cause weaker magnetic responses which can be identified from their uniform linearity.
<i>Ferrous</i>	This type of response is associated with ferrous material and may result from small items in the topsoil, larger buried objects such as pipes, or above ground features such as fence lines or pylons. Ferrous responses are usually regarded as modern. Individual burnt stones, fired bricks or igneous rocks can produce responses similar to ferrous material.
<i>Uncertain Origin</i>	Anomalies which stand out from the background magnetic variation, yet whose form and lack of patterning gives little clue as to their origin. Often the characteristics and distribution of the responses straddle the categories of <i>Possible Archaeology / Natural</i> or (in the case of linear responses) <i>Possible Archaeology / Agriculture</i> ; occasionally they are simply of an unusual form.

Where appropriate some anomalies will be further classified according to their form (positive or negative) and relative strength and coherence (trend: weak and poorly defined).

## Appendix B - Technical Information: Magnetic Theory

Detailed magnetic survey can be used to effectively define areas of past human activity by mapping spatial variation and contrast in the magnetic properties of soil, subsoil and bedrock. Although the changes in the magnetic field resulting from differing features in the soil are usually weak, changes as small as 0.1 nanoTeslas (nT) in an overall field strength of 48,000 (nT), can be accurately detected.

Weakly magnetic iron minerals are always present within the soil and areas of enhancement relate to increases in *magnetic susceptibility* and permanently magnetised *thermoremanent* material.

Magnetic susceptibility relates to the induced magnetism of a material when in the presence of a magnetic field. This magnetism can be considered as effectively permanent as it exists within the Earth's magnetic field. Magnetic susceptibility can become enhanced due to burning and complex biological or fermentation processes.


Thermoremanence is a permanent magnetism acquired by iron minerals that, after heating to a specific temperature known as the Curie Point, are effectively demagnetised followed by re-magnetisation by the Earth's magnetic field on cooling. Thermoremanent archaeological features can include hearths and kilns; material such as brick and tile may be magnetised through the same process.

Silting and deliberate infilling of ditches and pits with magnetically enhanced soil creates a relative contrast against the much lower levels of magnetism within the subsoil into which the feature is cut. Systematic mapping of magnetic anomalies will produce linear and discrete areas of enhancement allowing assessment and characterisation of subsurface features. Material such as subsoil and non-magnetic bedrock used to create former earthworks and walls may be mapped as areas of lower enhancement compared to surrounding soils.

Magnetic survey is carried out using a fluxgate gradiometer which is a passive instrument consisting of two sensors mounted vertically 1m apart. The instrument is carried about 30cm above the ground surface and the top sensor measures the Earth's magnetic field whilst the lower sensor measures the same field but is also more affected by any localised buried feature. The difference between the two sensors will relate to the strength of a magnetic field created by this feature, if no field is present the difference will be close to zero as the magnetic field measured by both sensors will be the same.

Factors affecting the magnetic survey may include soil type, local geology, previous human activity and disturbance from modern services.





- Archaeological
- Geophysical
- Laser Scanning
- Measured Building
- Topographic
- Utility Mapping

SUMO Services Ltd, incorporated under the laws of England and Wales,  
Company Registration No.4275993.  
Registered Office Unit 8 Hayward Business Centre, New Lane, Havant, Hampshire, PO9 2NL