

GEOFYSICAL SURVEY REPORT

Land North of Streetway Road, Palestine

Client

Pegasus Group

For

Drew Smith Ltd

Survey Report

06657

OASIS Ref. No.

sumogeop1-505507

Date

24 March 2022



Survey Report 06657: Land North of Streetway Road, Palestine

Survey dates	7-8 March 2022
Field co-ordinator	Stephen Weston BA
Field Team	Jay Griffiths BA
Report Date	24 March 2022
CAD Illustrations	Thomas Cockcroft MSc
Report Author	Thomas Cockcroft MSc
Project Manager	Simon Haddrell BEng AMBCS PCIfA
Report approved	Dr John Gater BSc DSc(Hon) MCIfA FSA

SUMO Geophysics Ltd

Vineyard House
Upper Hook Road
Upton upon Severn
Worcestershire
WR8 0SA

T: 01684 592266

www.sumoservices.com
geophysics@sumoservices.com

TABLE OF CONTENTS

1	LIST OF FIGURES	3
2	LIST OF APPENDICES	3
3	SURVEY TECHNIQUE	3
4	SUMMARY OF RESULTS	4
5	INTRODUCTION	4
6	RESULTS.....	5
7	DATA APPRAISAL & CONFIDENCE ASSESSMENT	6
8	CONCLUSION.....	6
9	REFERENCES	7
10	ARCHIVE	7

1 LIST OF FIGURES

Figure 01	NTS	Site Location
Figure 02	1:1500	Magnetometer Survey - Greyscale Plot
Figure 03	1:1500	Magnetometer Survey - Colour Plot
Figure 04	1:1500	Magnetometer Survey - Interpretation
Figure 05	NTS	Greyscale Plot / Interpretation / 1965 Ordnance Survey Mapping / 2008 Aerial Imagery
Figure 06	1:1500	Minimally Processed Data - Greyscale Plot
Figure 07	1:1500	XY Trace Plot (clipped at +/-15nT)

2 LIST OF APPENDICES

Appendix A	Technical Information: Magnetometer Survey Methods, Processing and Presentation
Appendix B	Technical Information: Magnetic Theory
Appendix C	OASIS Data Collection Sheet

3 SURVEY TECHNIQUE

3.1 Detailed magnetic survey (magnetometry) was chosen as the most efficient and effective method of locating the type of archaeological anomalies which might be expected at this site.

Bartington Grad 601-2 Traverse Interval 1.0m Sample Interval 0.25m

The only processes performed on data are the following unless specifically stated otherwise:

Zero Mean Traverse	This process sets the background mean of each traverse within each grid to zero. The operation removes instrument striping effects and edge discontinuities over the whole of the data set.
Step Correction (De-stagger)	When gradiometer data are collected in 'zig-zag' fashion, stepping errors can sometimes arise. These occur because of a slight difference in the speed of walking on the forward and reverse traverses. The result is a staggered effect in the data, which is particularly noticeable on linear anomalies. This process corrects these errors.

4 SUMMARY OF RESULTS

- 4.1 A magnetometer survey of 4.6 hectares of land north of Streetway Road, Palestine has recorded a curvilinear ditch-like response which has been categorised as being of possible archaeological interest. Anomalies of uncertain origin have also been detected; however, archaeological origins should not be discounted for these responses.

5 INTRODUCTION

- 5.1 **SUMO Geophysics Ltd** were commissioned to undertake a geophysical survey of an area outlined for development. This survey forms part of a staged programme of heritage assessment work being undertaken by **Pegasus Group** on behalf of **Drew Smith Ltd**.

5.2 Site Details

NGR / Postcode	SU 26206 41060 / SP11 7EH
Location	The site is located 9km east of Amesbury and 10km south-west of Andover. The survey area is bounded to the south by Streetway Road, to the west by an unnamed road and to the north by a railway line.
HER	Hampshire HER
OASIS Ref. No.	sumogeop1-505507
District	Test Valley District
Parish	Grateley Civil Parish
Topography	Flat
Land Use	Commercial short grass turf
Geology	Bedrock: Newhaven Chalk Formation - Chalk
(BGS 2022)	Superficial: None recorded
Soils (CU 2022)	Soilscape 3: Shallow lime-rich soils over chalk or limestone
Survey Methods	Magnetometer survey (fluxgate gradiometer)
Study Area	4.6 ha

5.3 **Archaeological Background**

- 5.3.1 The archaeological background has been provided by Pegasus Group (Pratt, E 2022. *Pers. Comm.*)
- 5.3.2 No heritage assets are recorded within the site by the Hampshire HER.
- 5.3.3 Prehistoric finds reported from the west and north-west side of Palestine include a Neolithic/Early Bronze Age scraper discovered within topsoil at Locke Close (ref. 30297); and Bronze Age spearheads found on land north of the junction of Mount Hermon Road and Streetway Road (ref. 30339) and to the south of Portway Farm (ref. 22193). Numerous cropmarks suggestive of Bronze Age burial mounds ('barrows') have been identified near Long Walk Plantation more than 1km west of Palestine. An Iron Age field system is recorded to the south-west of Portway Farm, to the north-west of Palestine (ref. 32954); a short distance to its south is the conjectured alignment of the Portway Roman road (ref. 21140), and beyond it, in the railway cutting a short distance to the north-west of Streetway Road, pits containing Roman pottery have been discovered (ref. 22948).
- 5.3.4 Another Bronze Age barrow cemetery is recorded at South View Farm on the east side of Palestine. Bronze Age worked flints have been collected from fields between Grateley Drove and Quarley Hill, to the north of Palestine (ref. 21268); Quarley Hill is the site of an Iron Age hillfort (ref. 22133) and earthworks of ranch boundaries extend southwards from it (refs. 22139,

21270). Possible Iron Age field systems are recorded at Blackburn Farm to the south-east of Palestine (refs. 32978, 32979, 32472, 32474). An Iron Age banjo enclosure and a Roman villa complex have been identified between Old Stockbridge Road and Pond Lane, c.1km east of Palestine (refs. 22925, 32437 22912, 67949, 67953). Closer to the village, a cropmark macula, perhaps associated with the villa, is visible on aerial photographs of land to the west of C A Stevens on Station Road (ref. 32439).

- 5.3.5 Recorded archaeological indications of medieval or later activity within the study area include earthworks and cropmarks of agricultural land use, such as lynchets on land between Mount Hermon Road and Mount Carmel Road (ref. 32953) and a windmill at Highlands on what is now the Grateley Business Park (ref. 22178). Only Grateley Station and not Palestine is depicted on Ordnance Survey mapping from 1876, 1897 or 1901; the layout of streets, but few buildings, is shown on the 1911 edition, which would seem to challenge the idea that the village was created for veterans of the First World War under Lloyd George's 'Homes Fit For Heroes' scheme.

5.4 ***Aims and Objectives***

- 5.4.1 To locate and characterise any anomalies of possible archaeological interest within the study area.

6 **RESULTS**

6.1 ***Possible Archaeology***

- 6.2 A well-defined ditch-like anomaly and a weaker trend have been recorded in the survey. The ditch-like response is also visible as cropmarks on aerial imagery (see Figure 05). Although no other responses of clear interest have been recorded in the survey, it is possible that the anomaly and trend are associated with the cropmarks of prehistoric and historic activity recorded in the wider area. For this reason, a *Possible Archaeology* interpretation has been assigned.

6.3 ***Uncertain***

- 6.3.1 A number of linear responses and numerous pit-like anomalies have been recorded throughout the dataset. Generally, they are weak and lack the defined morphology of responses that would usually be interpreted as being of archaeological interest; consequently, they have been categorised as *Uncertain*. They are likely to be a product of the underlying geology and/or due to modern agricultural processes. However, given the proximity of the ditch (see 6.1) archaeological origins for the responses cannot be discounted.

6.4 ***Ferrous / Magnetic Disturbance***

- 6.4.1 Ferrous responses close to boundaries are due to adjacent fences, gates and the railway line to the north. Smaller scale ferrous anomalies ("iron spikes") are present throughout the data and are characteristic of small pieces of ferrous debris (or brick / tile) in the topsoil; they are commonly assigned a modern origin. Only the most prominent of these are highlighted on the interpretation diagram.

7 DATA APPRAISAL & CONFIDENCE ASSESSMENT

- 7.1 Historic England guidelines (EH 2008) Table 4 states that the typical magnetic response on the local soils / geology is good. The results from this survey indicate the presence of ditch-like responses of possible archaeological interest; as a consequence, the survey is deemed to have worked well.

8 CONCLUSION




- 8.1 The magnetometer survey has recorded a curvilinear ditch-like response which has been categorised as being of possible archaeological interest. It is well-defined and could form part of a wider field system which is recorded within the vicinity of the site. Numerous linear anomalies and weak pit-like responses have also been recorded in the survey. They are generally weaker and lack the defined morphology of archaeological anomalies, hence their uncertain interpretation. However, archaeological origins for these responses should not be entirely dismissed.

9 REFERENCES

- BGS 2022 British Geological Survey, Geology of Britain viewer [accessed 21/03/2022] *website:* (<http://www.bgs.ac.uk/opengeoscience/home.html?Accordion1=1#maps>)
- ClfA 2014 *Standard and Guidance for Archaeological Geophysical Survey*. Amended 2016.
ClfA Guidance note. Chartered Institute for Archaeologists, Reading
Amended 2020 https://www.archaeologists.net/sites/default/files/ClfAS%26GGeophysics_3.pdf
- CU 2022 The Soils Guide. Available: www.landis.org.uk. Cranfield University, UK. [accessed 21/03/2022] *website:* <http://mapapps2.bgs.ac.uk/ukso/home.html>
- EAC 2016 *EAC Guidelines for the Use of Geophysics in Archaeology*, European Archaeological Council, Guidelines 2.
- EH 2008 *Geophysical Survey in Archaeological Field Evaluation*. English Heritage, Swindon (now withdrawn, but used for evaluating suitability of soil types)


10 ARCHIVE

- 10.1 The minimally processed data, data images, XY traces and a copy of this report are stored in **SUMO Geophysics Ltd.'s** digital archive, on an internal RAID configured NAS drive in the Midland's Office. These data are also backed up to the Cloud for off-site storage.
- 10.2 The Grey Literature will be archived with OASIS and the relevant HER within a period of 12 months

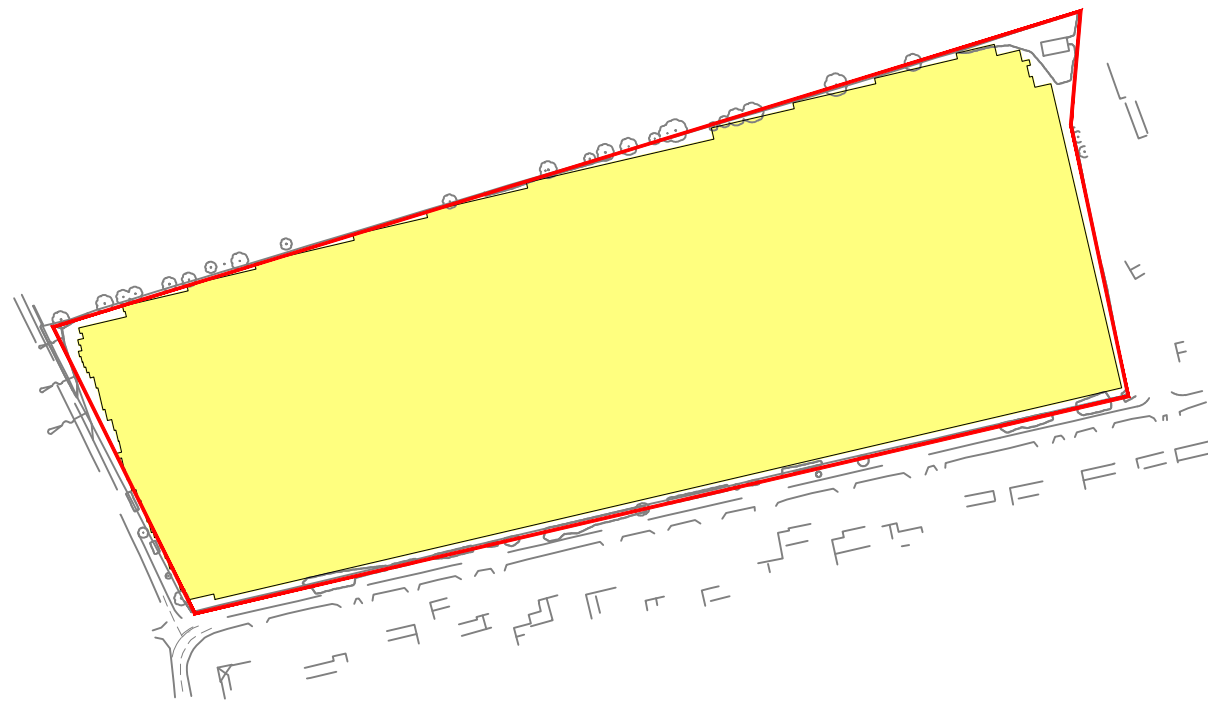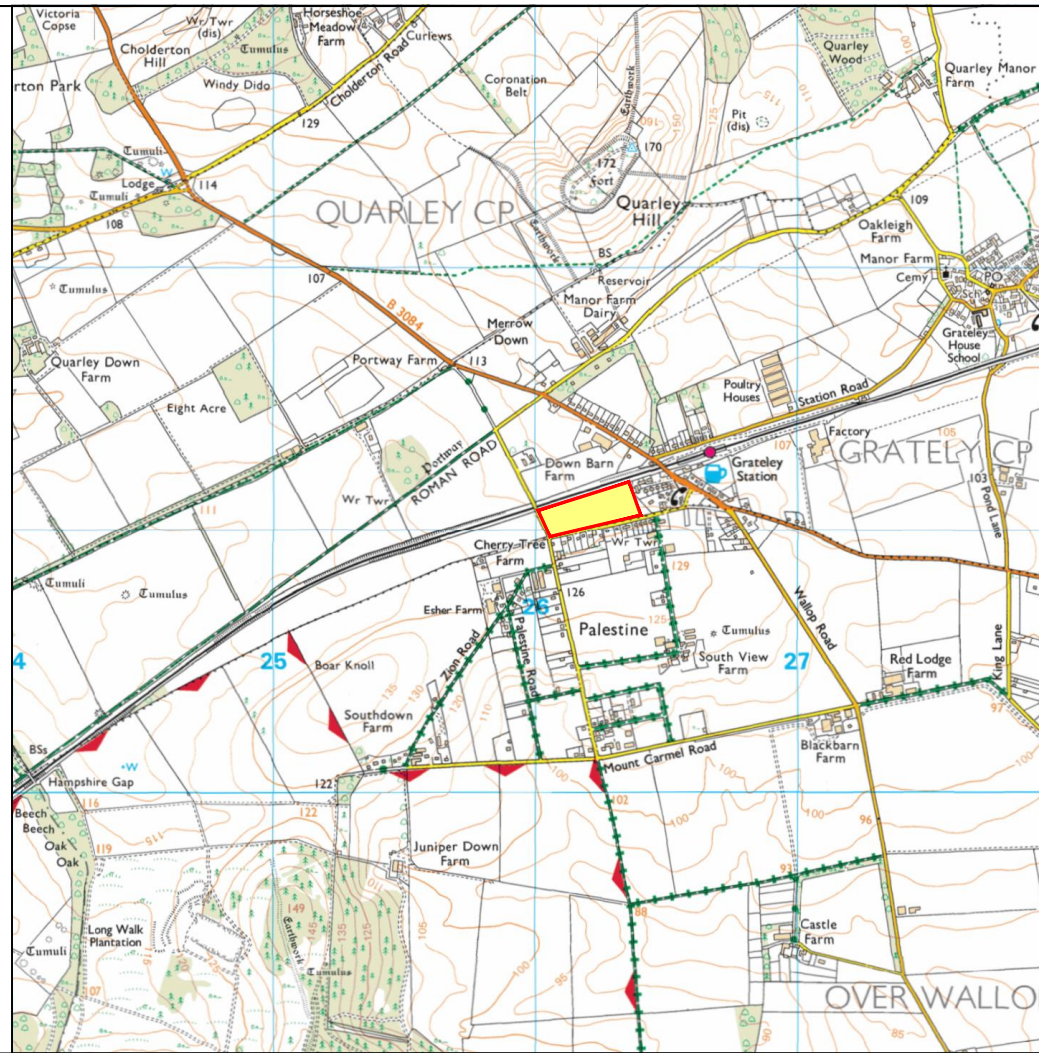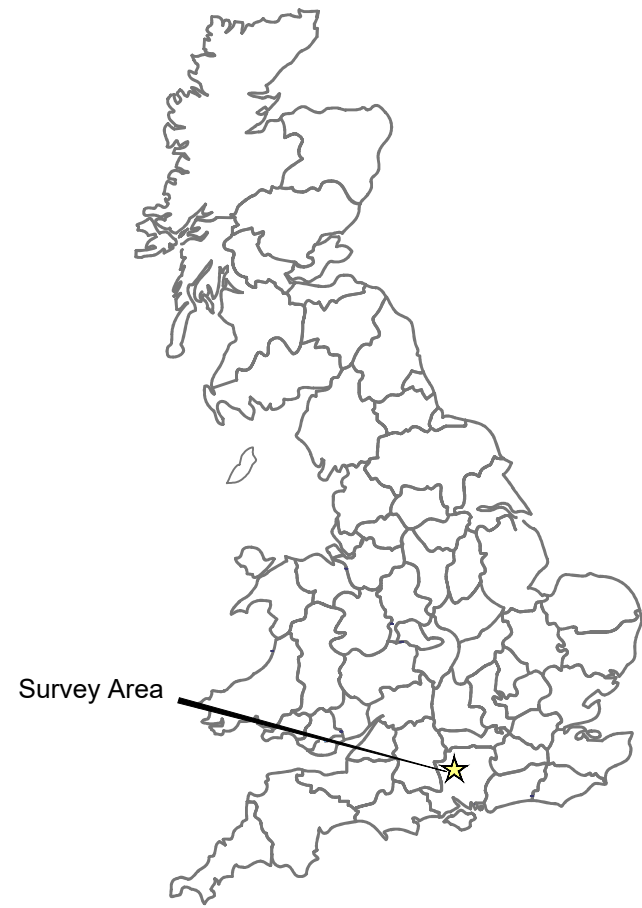

Reproduced from Ordnance Survey's 1:25 000 map of 1998 with the permission of the controller of Her Majesty's Stationery Office. Crown Copyright reserved. Licence No: 100018665

	Survey Areas	
--	--------------	--






Title: Site Location

Client: Pegasus Group

Project: 06657 - Land North of Streetway Road, Palestine

Scale: NOT TO SCALE	Fig No: 01
---------------------	------------

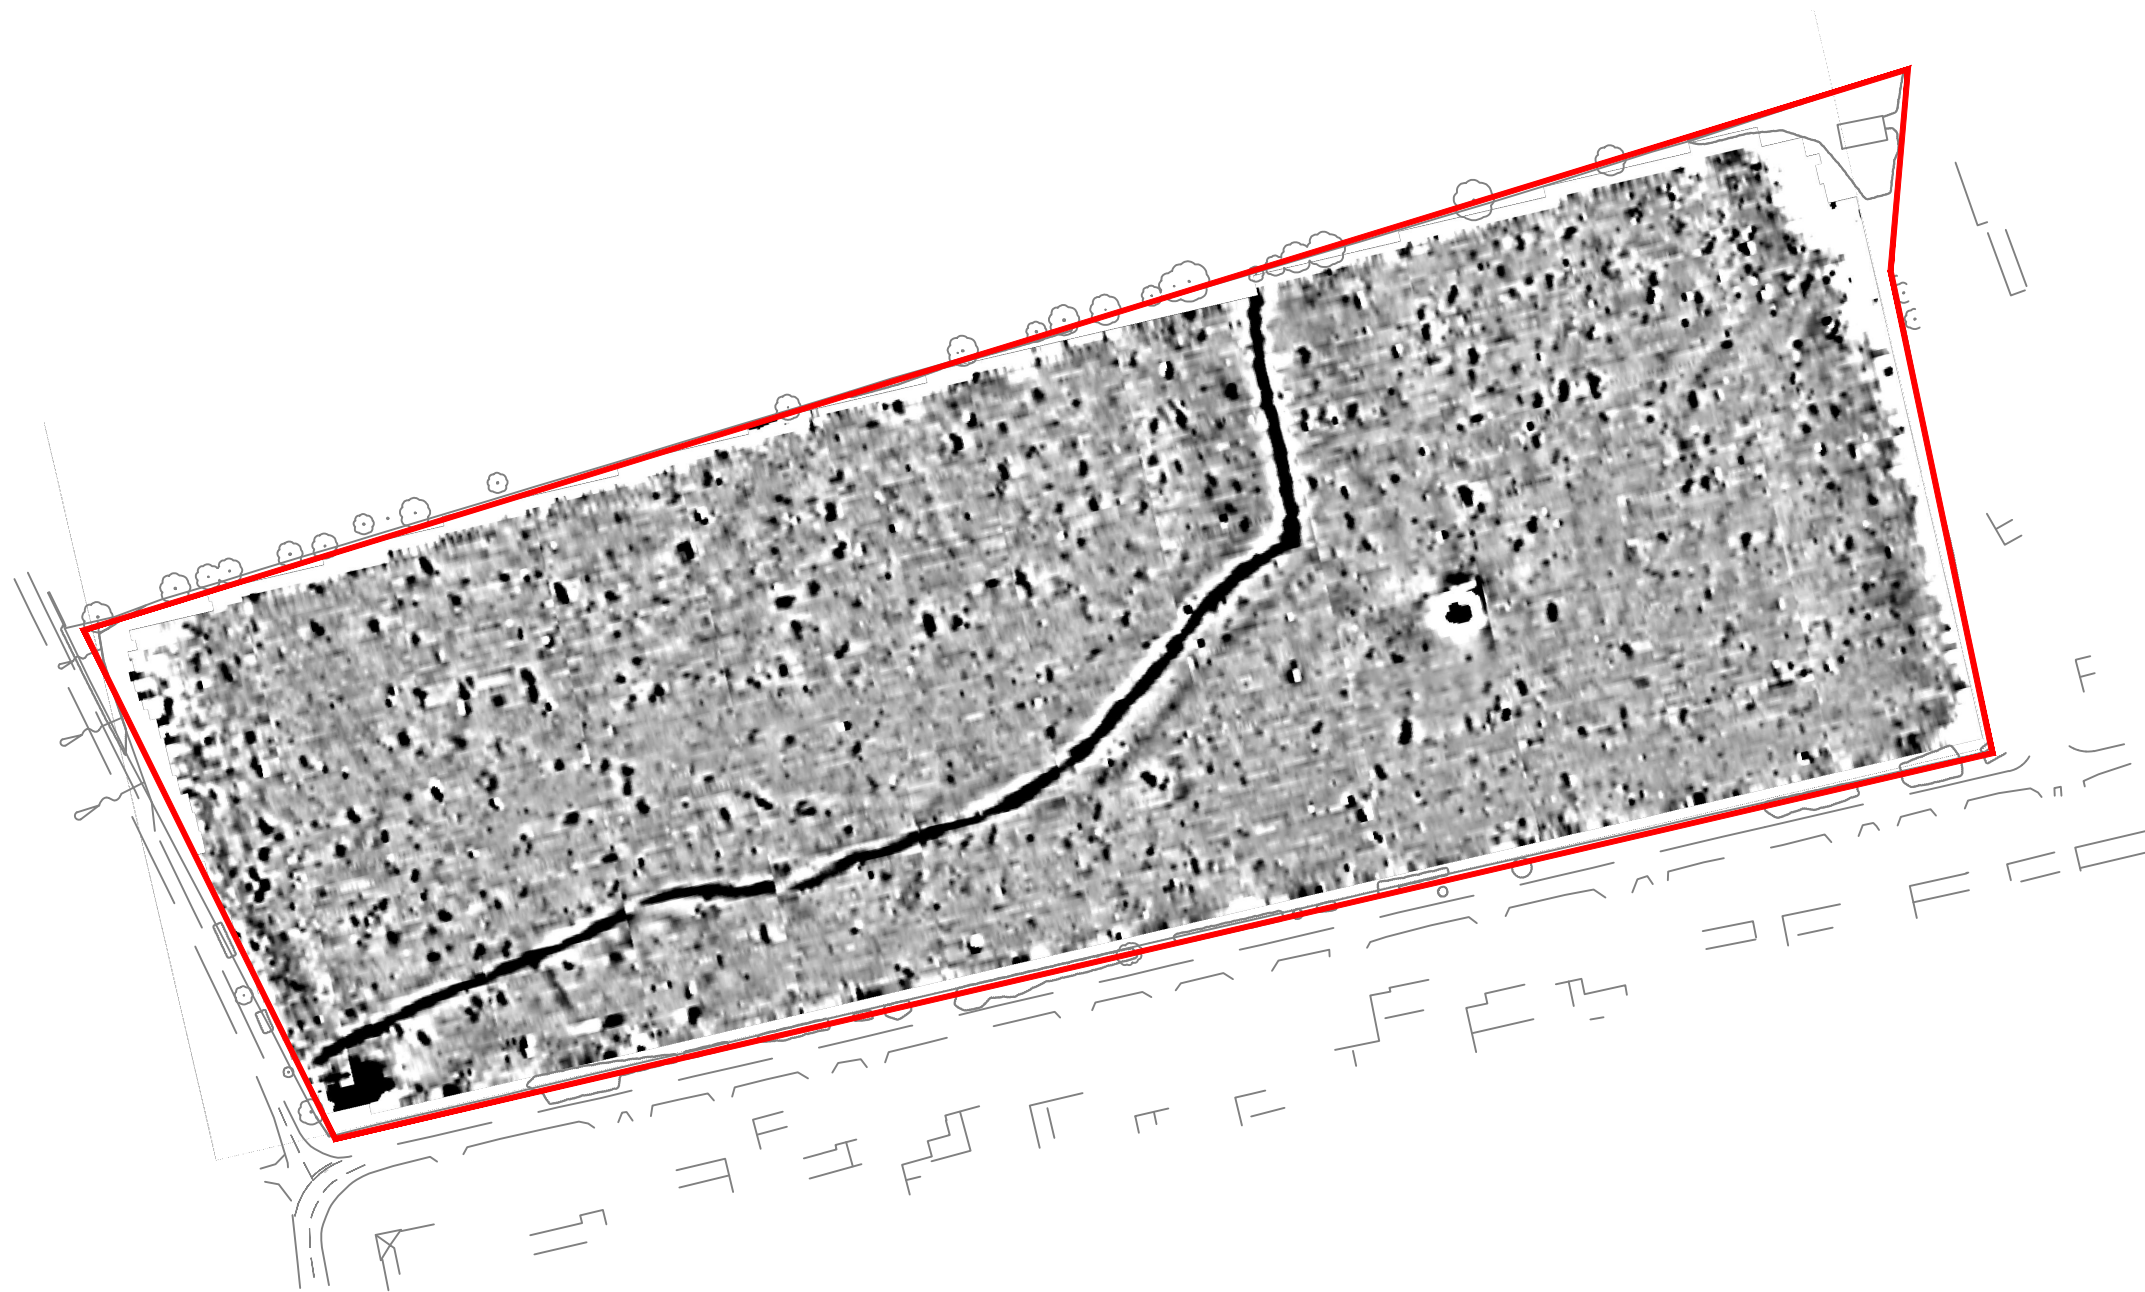

Title: Magnetometer Survey - Greyscale Plot

Client: Pegasus Group

Project: 06657 - Land North of Streetway Road, Palestine







Fig No: 02

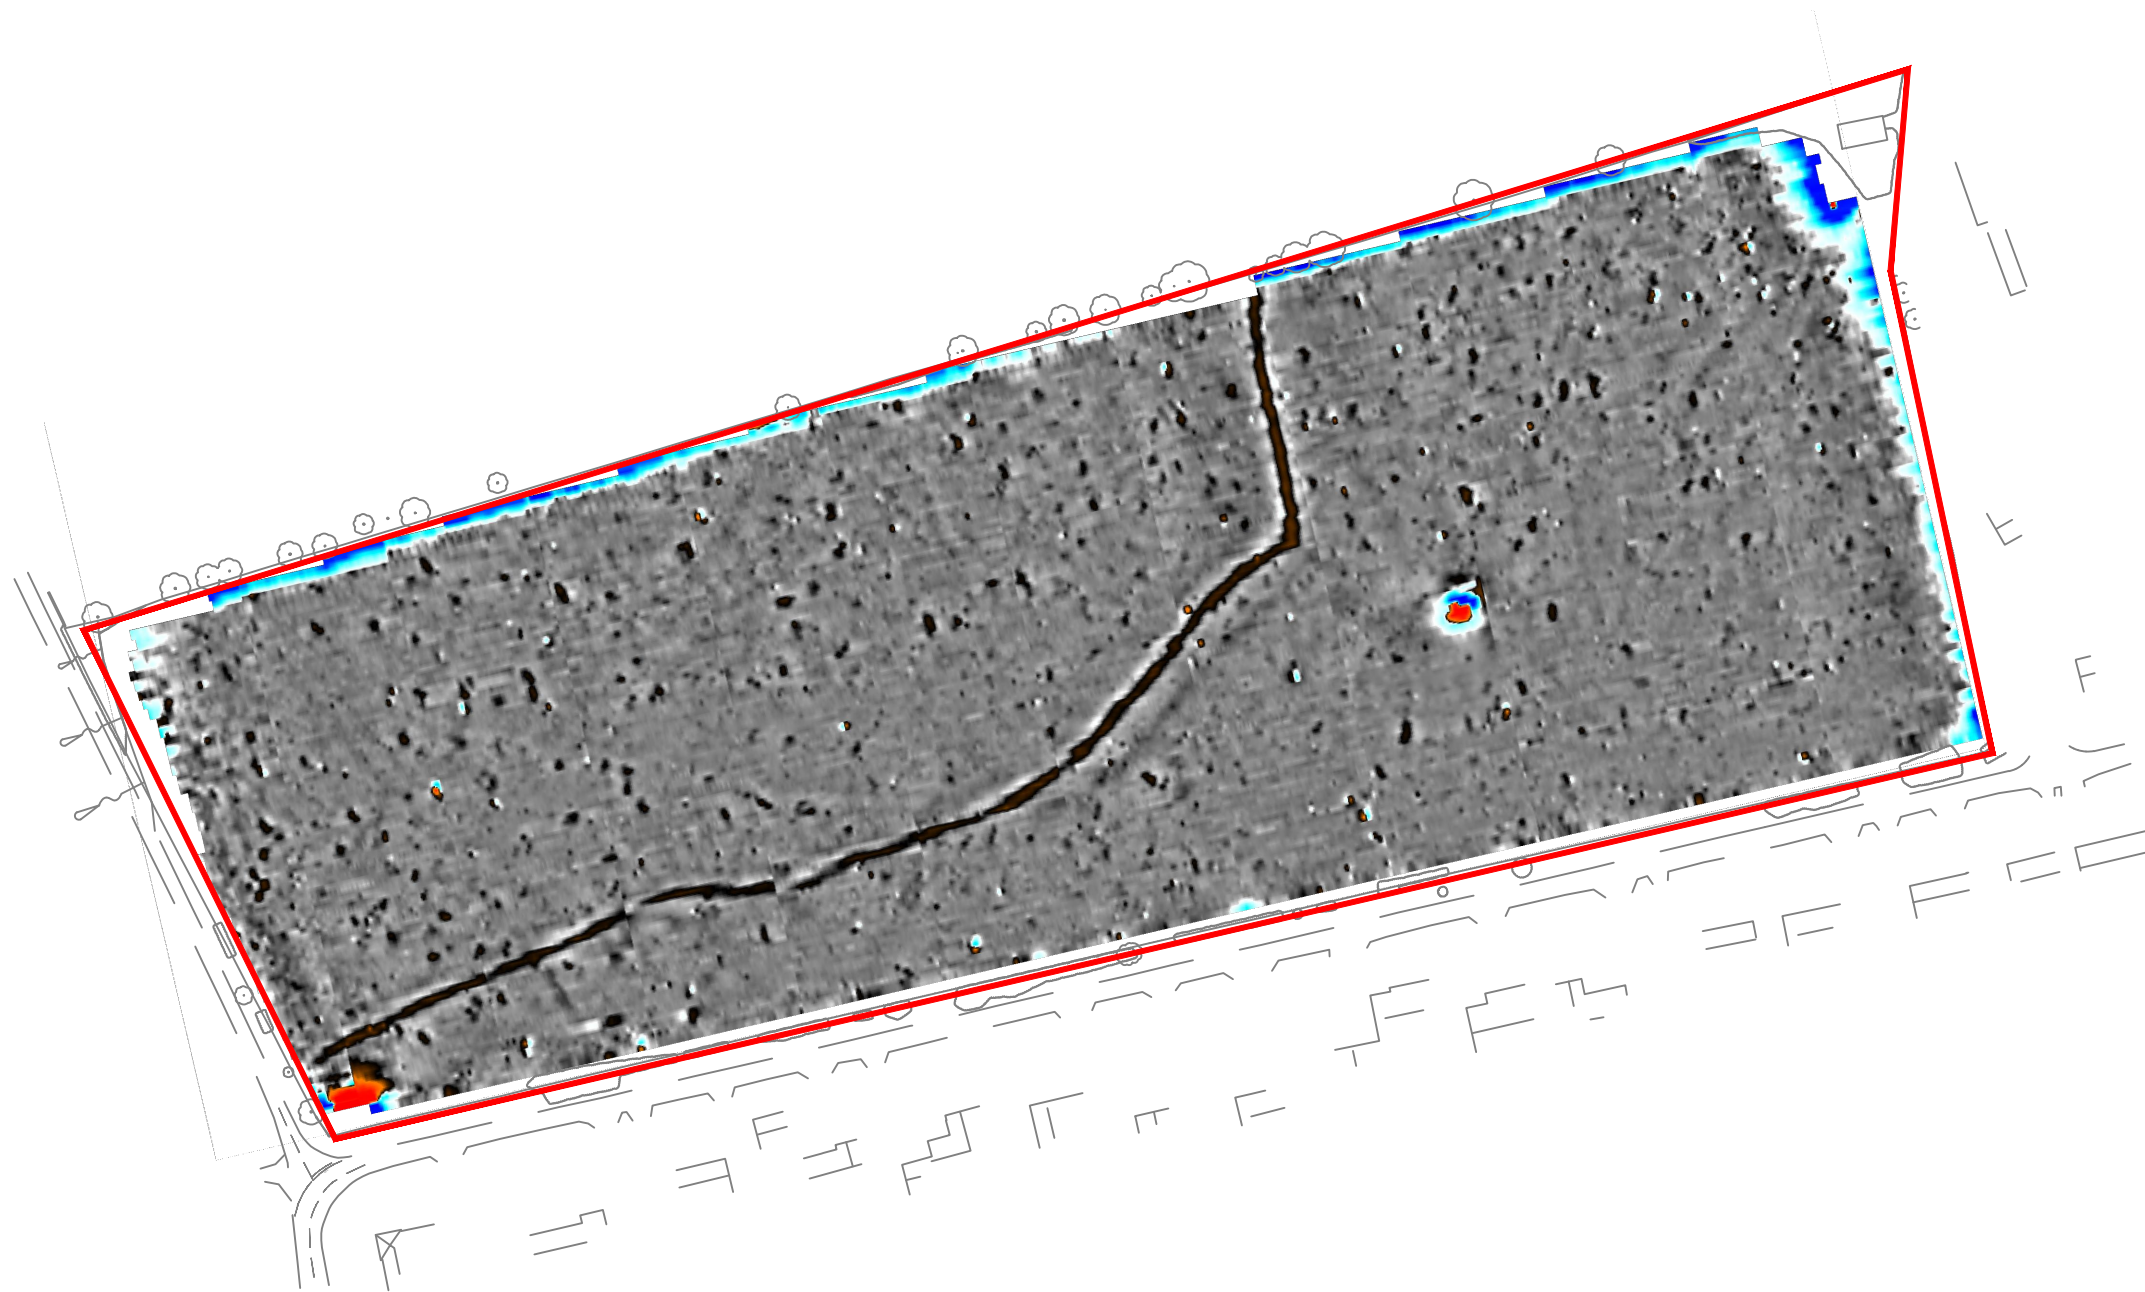

Title:
Magnetometer Survey - Colour Plot

Client:
Pegasus Group

Project:
06657 - Land North of Streetway Road,
Palestine









Fig No:
B



KEY

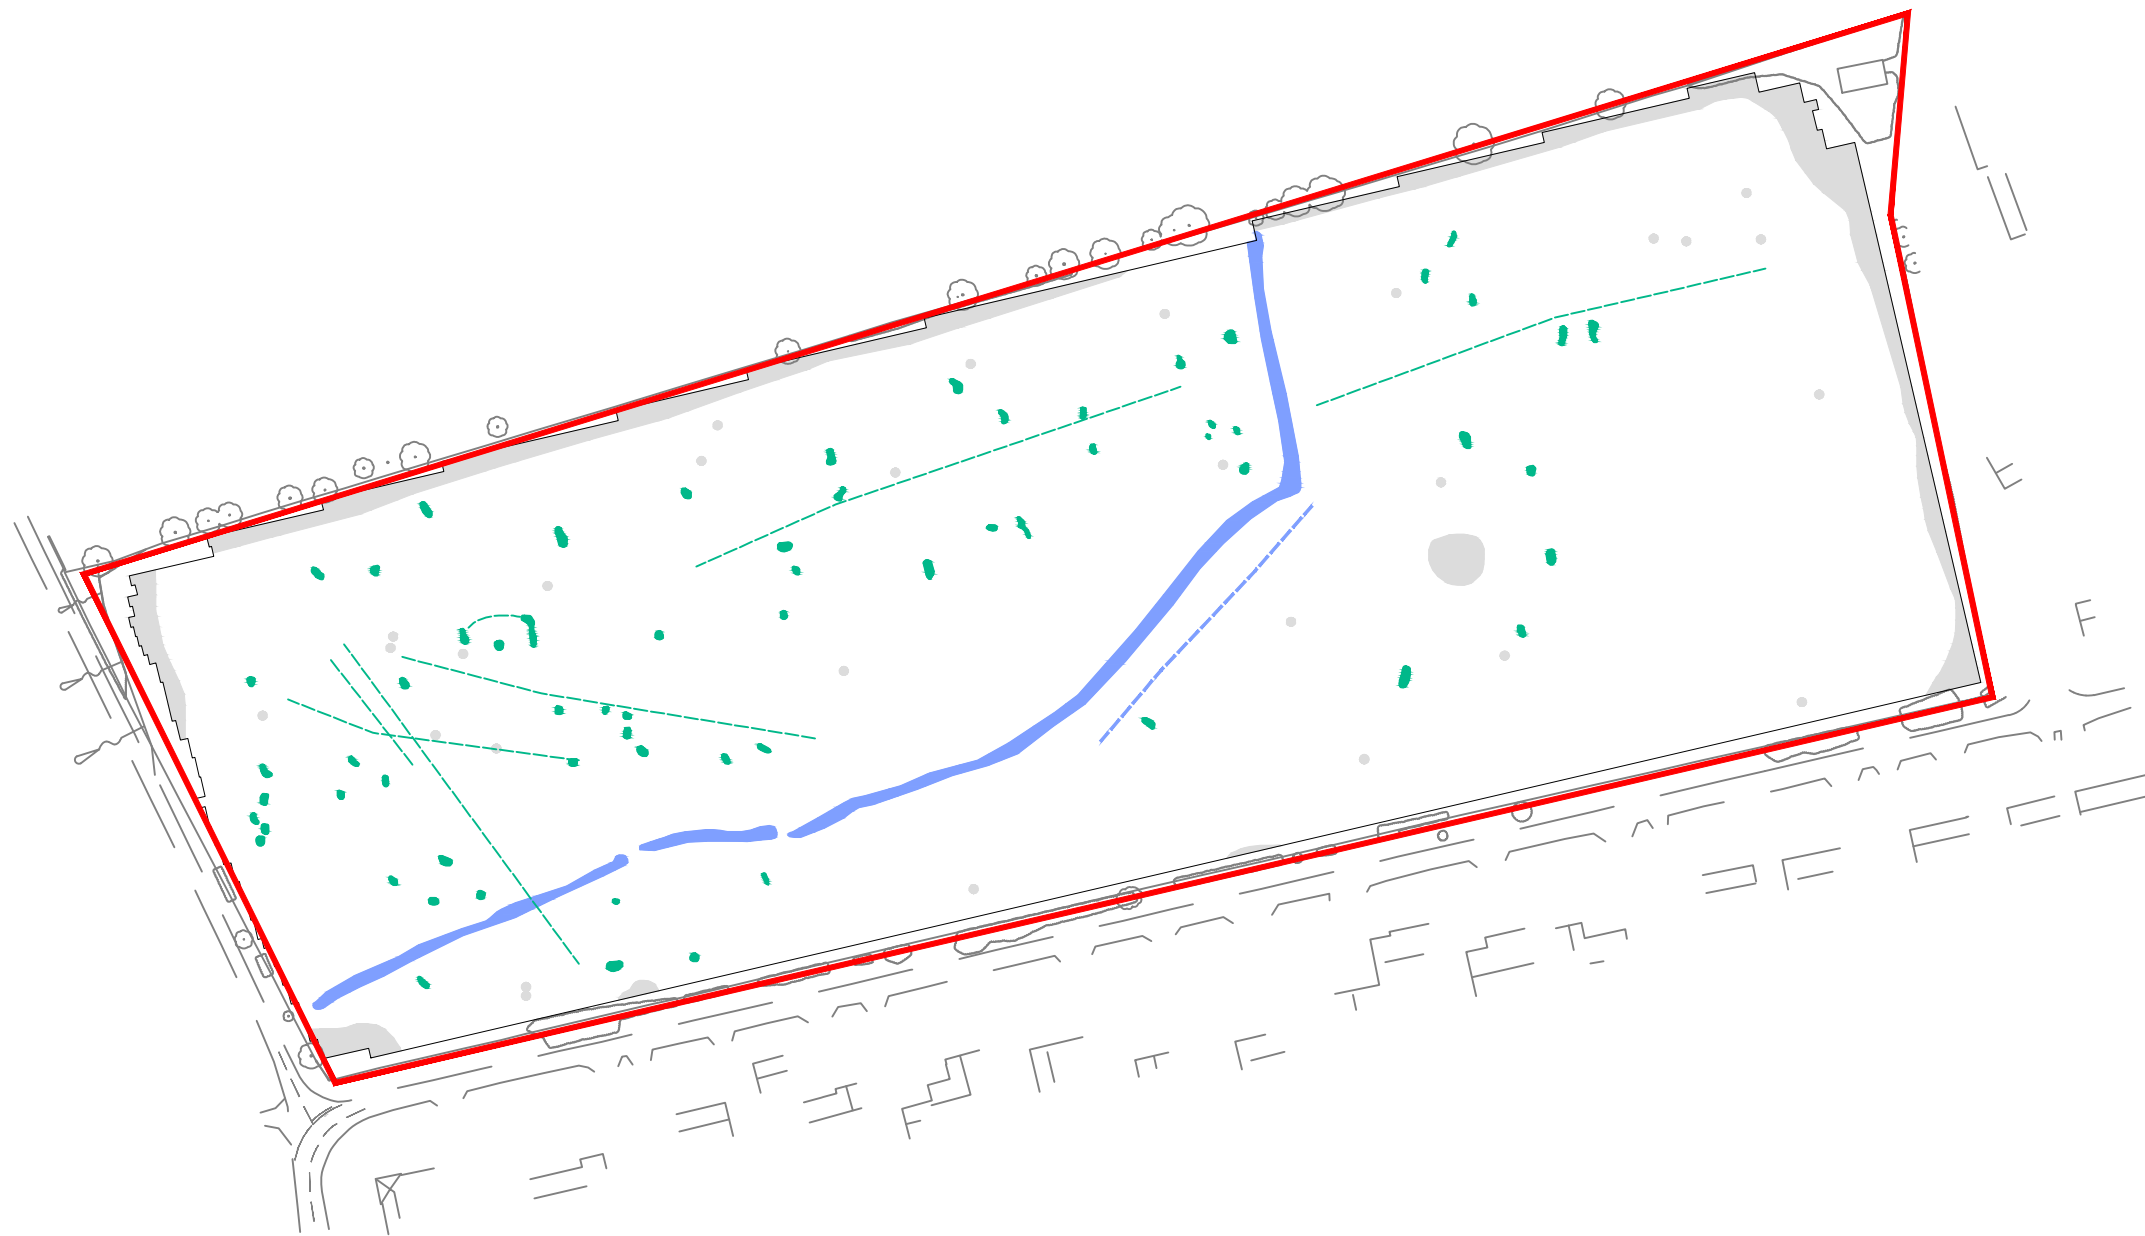	Possible archaeology (discrete anomaly / trend)
	Uncertain Origin (discrete anomaly / trend)
	Ferrous






Title: Magnetometer Survey - Interpretation

Client: Pegasus Group




Project: 06657 - Land North of Streetway Road, Palestine

Scale: 0 metres 75
1:1500 @ A3

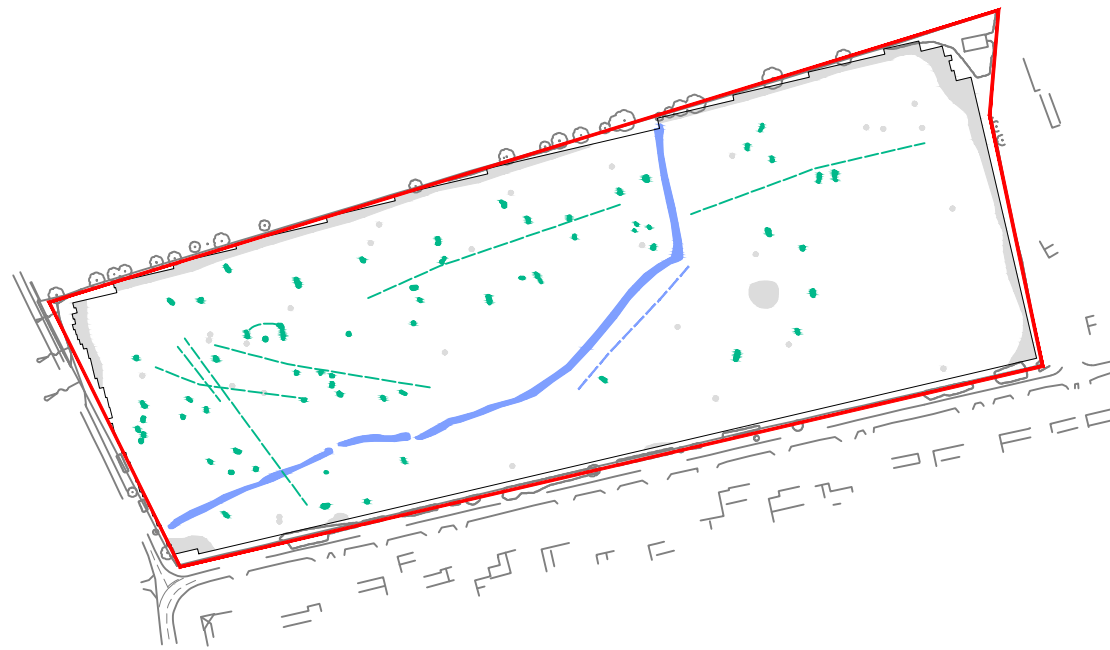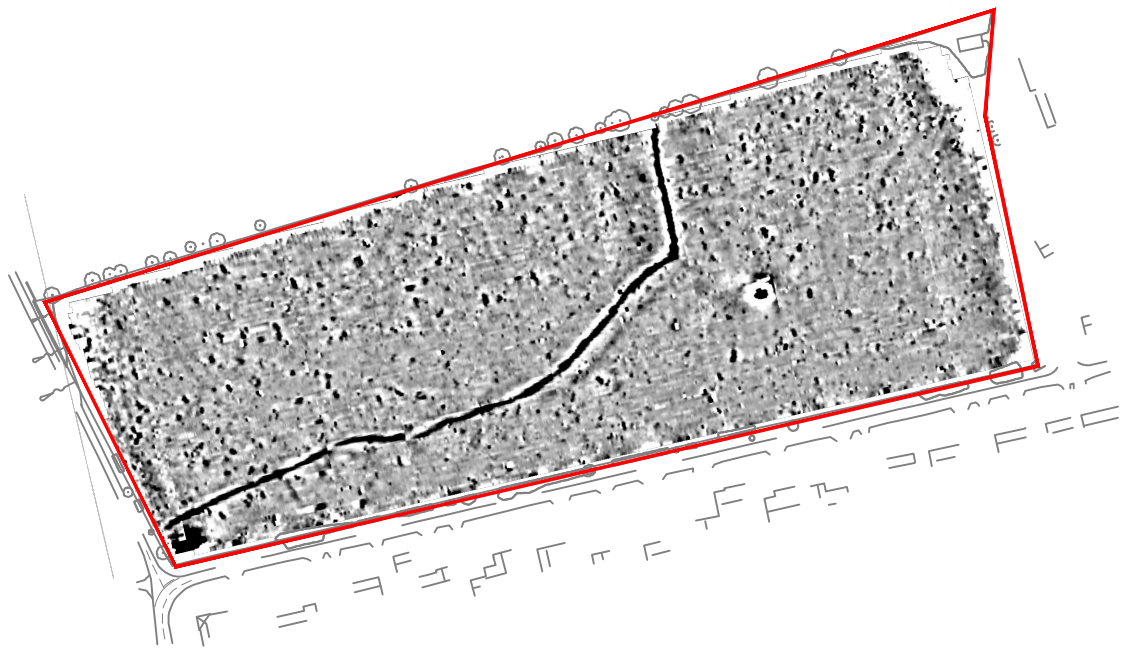Fig No: 04



KEY

	Possible archaeology (discrete anomaly / trend)
	Uncertain Origin (discrete anomaly / trend)
	Ferrous




Title: Greyscale Plot / Interpretation / 1965 Ordnance Survey Mapping / 2008 Aerial Imagery




Client: Pegasus Group

Project: 06657 - Land North of Streetway Road, Palestine

Scale: NOT TO SCALE

Fig No: 05

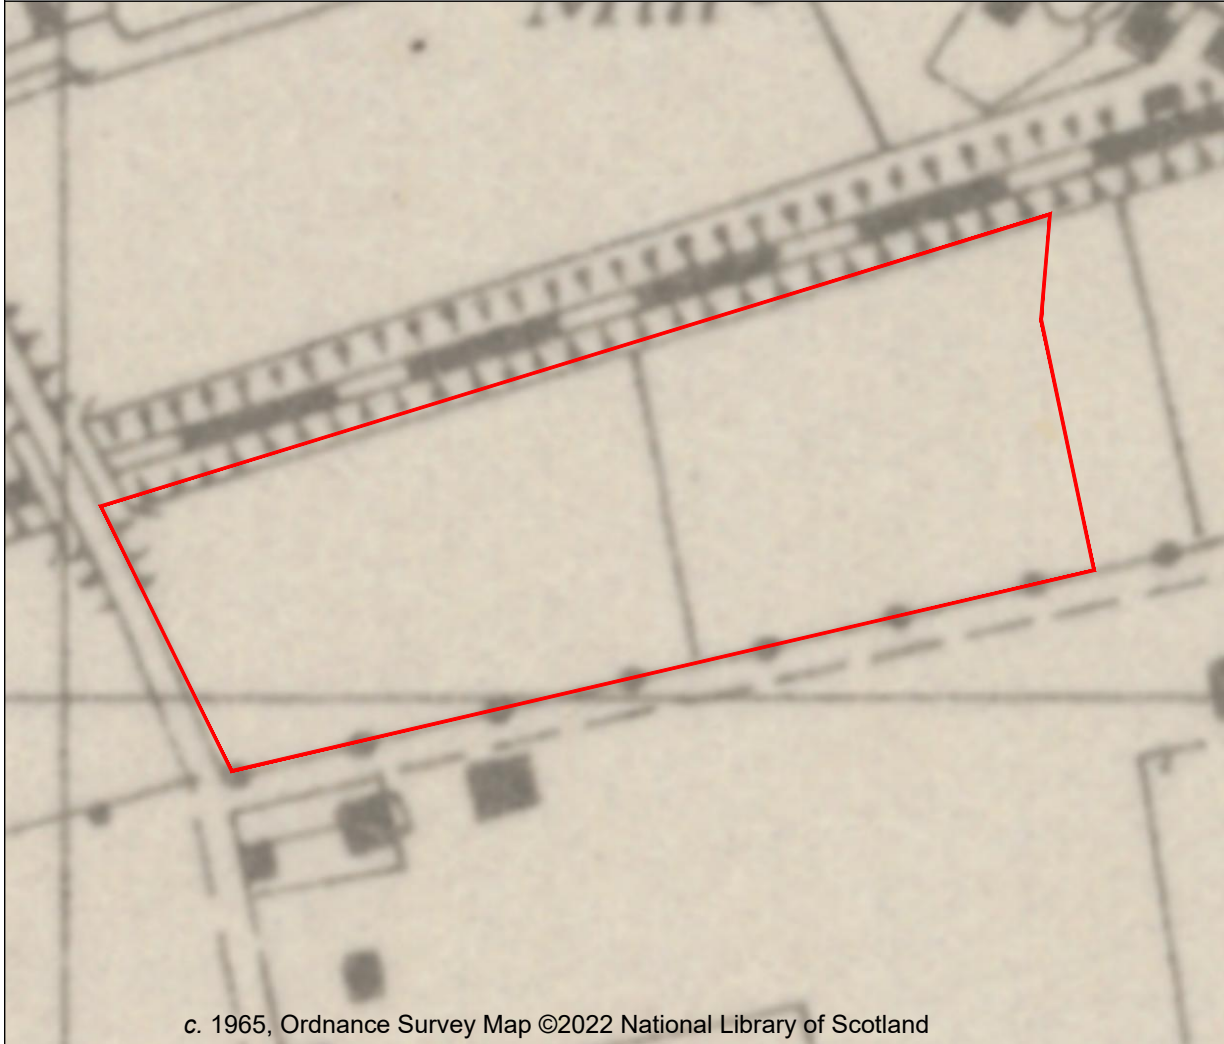

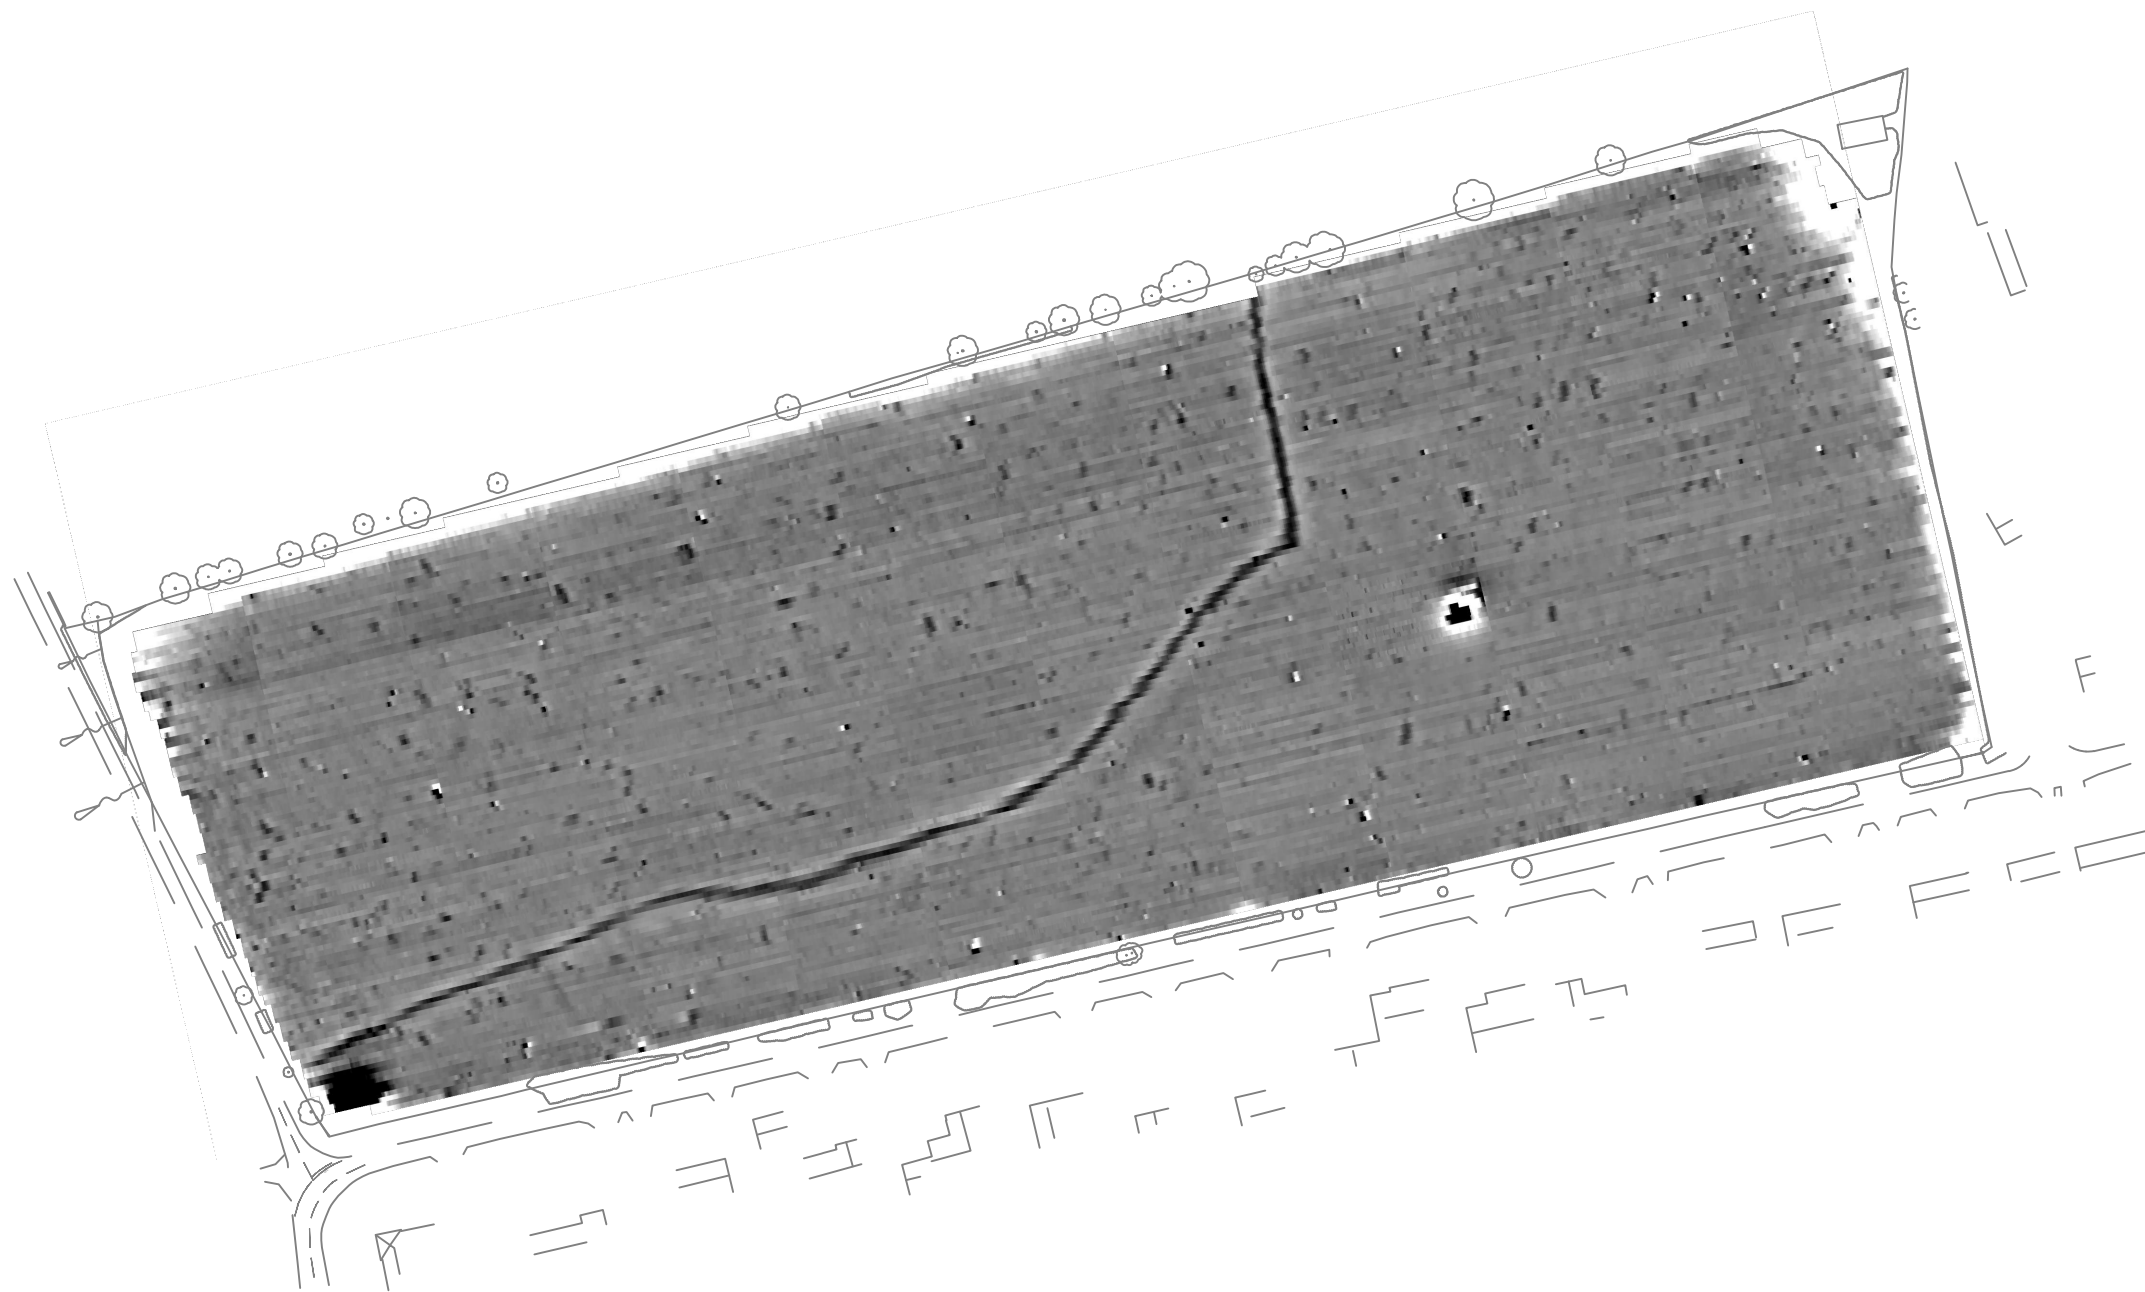

Title:
Minimally Processed Data - Greyscale Plot

Client:
Pegasus Group

Project:
06657 - Land North of Streetway Road,
Palestine






Fig No:
06

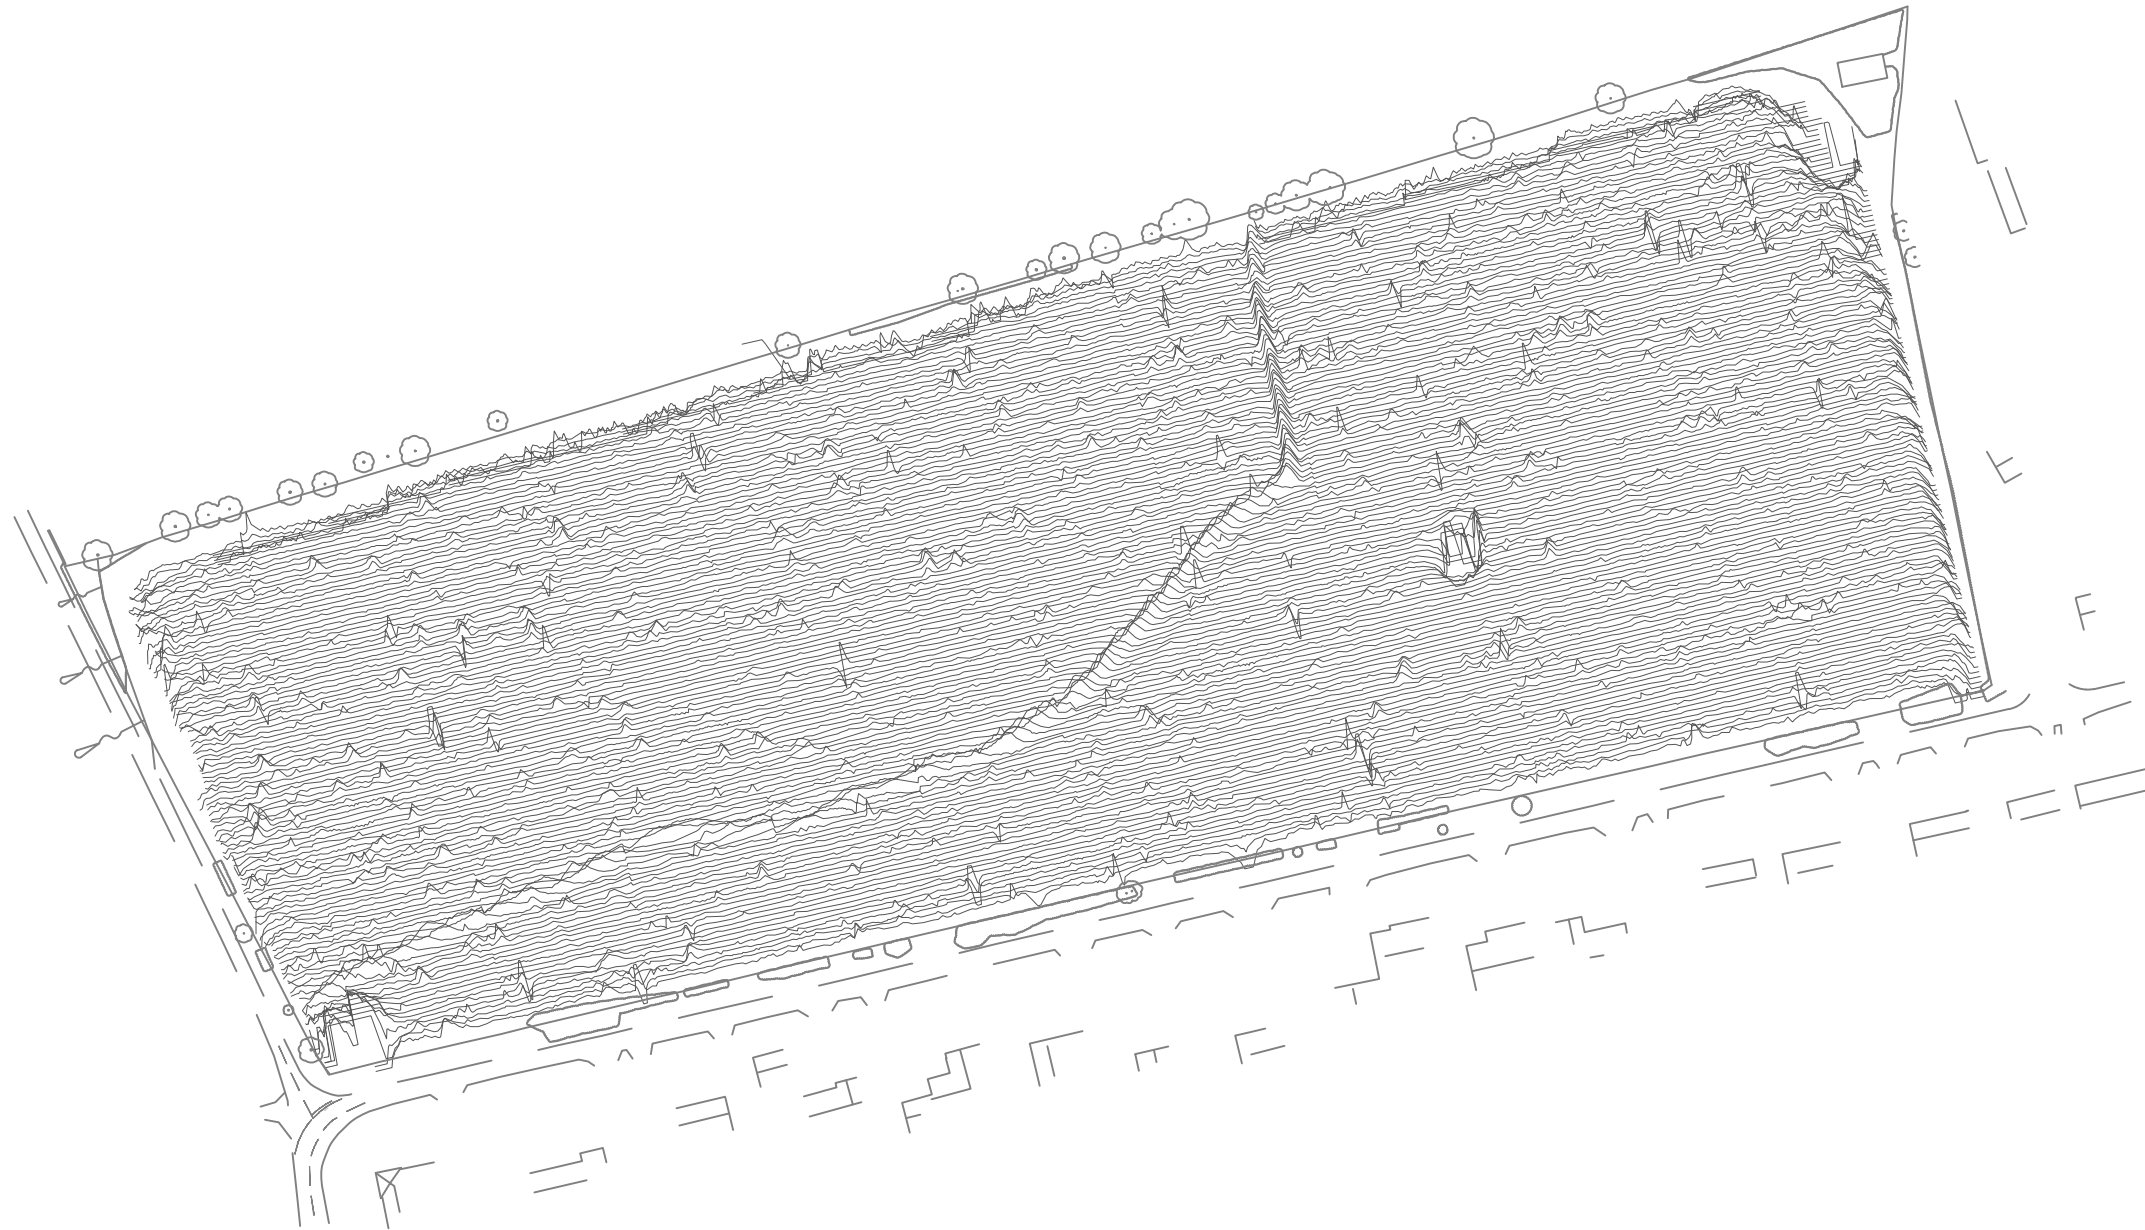

Title: XY Trace Plot (clipped at +/-15nT)

Client: Pegasus Group

Project: 06657 - Land North of Streetway Road, Palestine

Scale: 0 metres 75
1:1500 @ A3

Fig No: 07

Standards & Guidance

This report and all fieldwork have been conducted in accordance with the latest guidance documents issued by Historic England (EH 2008) (then English Heritage), the Chartered Institute for Archaeologists (CIfA 2014) and the European Archaeological Council (EAC 2016).

Grid Positioning

For hand held gradiometers the location of the survey grids has been plotted together with the referencing information. Grids were set out using a Trimble R8 Real Time Kinematic (RTK) VRS Now GNSS GPS system.

An RTK GPS (Real-time Kinematic Global Positioning System) can locate a point on the ground to a far greater accuracy than a standard GPS unit. A standard GPS suffers from errors created by satellite orbit errors, clock errors and atmospheric interference, resulting in an accuracy of 5m-10m. An RTK system uses a single base station receiver and a number of mobile units. The base station re-broadcasts the phase of the carrier it measured, and the mobile units compare their own phase measurements with those they received from the base station. This results in an accuracy of around 0.01m.

Technique	Instrument	Traverse Interval	Sample Interval
Magnetometer	Bartington Grad 601-2	1m	0.25m

Instrumentation: **Bartington Grad 601-2**

Bartington instruments operate in a gradiometer configuration which comprises fluxgate sensors mounted vertically, set 1.0m apart. The fluxgate gradiometer suppresses any diurnal or regional effects. The instruments are carried, or cart mounted, with the bottom sensor approximately 0.1-0.3m from the ground surface. At each survey station, the difference in the magnetic field between the two fluxgates is measured in nanoTesla (nT). The sensitivity of the instrument can be adjusted; for most archaeological surveys the most sensitive range (0.1nT) is used. Generally, features up to 1m deep may be detected by this method, though strongly magnetic objects may be visible at greater depths. The Bartington instrument can collect two lines of data per traverse with gradiometer units mounted laterally with a separation of 1.0m. The readings are logged consecutively into the data logger which in turn is daily down-loaded into a portable computer whilst on site. At the end of each site survey, data is transferred to the office for processing and presentation.

Data Processing

Zero Mean	This process sets the background mean of each traverse within each grid to zero.
Traverse	The operation removes striping effects and edge discontinuities over the whole of the data set.
Step Correction (De-stagger)	When gradiometer data are collected in 'zig-zag' fashion, stepping errors can sometimes arise. These occur because of a slight difference in the speed of walking on the forward and reverse traverses. The result is a staggered effect in the data, which is particularly noticeable on linear anomalies. This process corrects these errors.

Display

Greyscale/ Colourscale Plot	This format divides a given range of readings into a set number of classes. Each class is represented by a specific shade of grey, the intensity increasing with value. All values above the given range are allocated the same shade (maximum intensity); similarly, all values below the given range are represented by the minimum intensity shade. Similar plots can be produced in colour, either using a wide range of colours or by selecting two or three colours to represent positive and negative values. The assigned range (plotting levels) can be adjusted to emphasise different anomalies in the data-set.
--------------------------------	---

Presentation of results and interpretation

The presentation of the results includes a 'minimally processed data' and a 'processed data' greyscale plot. Magnetic anomalies are identified, interpreted and plotted onto the 'Interpretation' drawings.

When interpreting the results, several factors are taken into consideration, including the nature of archaeological features being investigated and the local conditions at the site (geology, pedology, topography etc.). Anomalies are categorised by their potential origin. Where responses can be related to other existing evidence, the anomalies will be given specific categories, such as: Abbey Wall or Roman Road. Where the interpretation is based largely on the geophysical data, levels of confidence are implied, for example: Probable, or Possible Archaeology. The former is used for a confident interpretation, based on anomaly definition and/or other corroborative data such as cropmarks. Poor anomaly definition, a lack of clear patterns to the responses and an absence of other supporting data reduces confidence, hence the classification Possible.

Interpretation Categories

In certain circumstances (usually when there is corroborative evidence from desk-based or excavation data) very specific interpretations can be assigned to magnetic anomalies (for example, *Roman Road, Wall, etc.*) and where appropriate, such interpretations will be applied. The list below outlines the generic categories commonly used in the interpretation of the results.

<i>Archaeology / Probable Archaeology</i>	This term is used when the form, nature and pattern of the responses are clearly or very probably archaeological and /or if corroborative evidence is available. These anomalies, whilst considered anthropogenic, could be of any age.
<i>Possible Archaeology</i>	These anomalies exhibit either weak signal strength and / or poor definition, or form incomplete archaeological patterns, thereby reducing the level of confidence in the interpretation. Although the archaeological interpretation is favoured, they may be the result of variable soil depth, plough damage or even aliasing as a result of data collection orientation.
<i>Industrial / Burnt-Fired</i>	Strong magnetic anomalies that, due to their shape and form or the context in which they are found, suggest the presence of kilns, ovens, corn dryers, metal-working areas or hearths. It should be noted that in many instances modern ferrous material can produce similar magnetic anomalies.
<i>Former Field Boundary (probable & possible)</i>	Anomalies that correspond to former boundaries indicated on historic mapping, or which are clearly a continuation of existing land divisions. Possible denotes less confidence where the anomaly may not be shown on historic mapping but nevertheless the anomaly displays all the characteristics of a field boundary.
<i>Ridge & Furrow</i>	Parallel linear anomalies whose broad spacing suggests ridge and furrow cultivation. In some cases, the response may be the result of more recent agricultural activity.
<i>Agriculture (ploughing)</i>	Parallel linear anomalies or trends with a narrower spacing, sometimes aligned with existing boundaries, indicating more recent cultivation regimes.
<i>Land Drain</i>	Weakly magnetic linear anomalies, quite often appearing in series forming parallel and herringbone patterns. Smaller drains may lead and empty into larger diameter pipes, which in turn usually lead to local streams and ponds. These are indicative of clay fired land drains.
<i>Natural</i>	These responses form clear patterns in geographical zones where natural variations are known to produce significant magnetic distortions.
<i>Magnetic Disturbance</i>	Broad zones of strong dipolar anomalies, commonly found in places where modern ferrous or fired materials (e.g. brick rubble) are present.
<i>Service</i>	Magnetically strong anomalies, usually forming linear features are indicative of ferrous pipes/cables. Sometimes other materials (e.g. pvc) or the fill of the trench can cause weaker magnetic responses which can be identified from their uniform linearity.
<i>Ferrous</i>	This type of response is associated with ferrous material and may result from small items in the topsoil, larger buried objects such as pipes, or above ground features such as fence lines or pylons. Ferrous responses are usually regarded as modern. Individual burnt stones, fired bricks or igneous rocks can produce responses similar to ferrous material.
<i>Uncertain Origin</i>	Anomalies which stand out from the background magnetic variation, yet whose form and lack of patterning gives little clue as to their origin. Often the characteristics and distribution of the responses straddle the categories of <i>Possible Archaeology / Natural</i> or (in the case of linear responses) <i>Possible Archaeology / Agriculture</i> ; occasionally they are simply of an unusual form.

Where appropriate some anomalies will be further classified according to their form (positive or negative) and relative strength and coherence (trend: weak and poorly defined).

Appendix B - Technical Information: Magnetic Theory

Detailed magnetic survey can be used to effectively define areas of past human activity by mapping spatial variation and contrast in the magnetic properties of soil, subsoil and bedrock. Although the changes in the magnetic field resulting from differing features in the soil are usually weak, changes as small as 0.1 nanoTeslas (nT) in an overall field strength of 48,000 (nT), can be accurately detected.

Weakly magnetic iron minerals are always present within the soil and areas of enhancement relate to increases in *magnetic susceptibility* and permanently magnetised *thermoremanent* material.

Magnetic susceptibility relates to the induced magnetism of a material when in the presence of a magnetic field. This magnetism can be considered as effectively permanent as it exists within the Earth's magnetic field. Magnetic susceptibility can become enhanced due to burning and complex biological or fermentation processes.

Thermoremanence is a permanent magnetism acquired by iron minerals that, after heating to a specific temperature known as the Curie Point, are effectively demagnetised followed by re-magnetisation by the Earth's magnetic field on cooling. Thermoremanent archaeological features can include hearths and kilns; material such as brick and tile may be magnetised through the same process.


Silting and deliberate infilling of ditches and pits with magnetically enhanced soil creates a relative contrast against the much lower levels of magnetism within the subsoil into which the feature is cut. Systematic mapping of magnetic anomalies will produce linear and discrete areas of enhancement allowing assessment and characterisation of subsurface features. Material such as subsoil and non-magnetic bedrock used to create former earthworks and walls may be mapped as areas of lower enhancement compared to surrounding soils.

Magnetic survey is carried out using a fluxgate gradiometer which is a passive instrument consisting of two sensors mounted vertically 1m apart. The instrument is carried about 30cm above the ground surface and the top sensor measures the Earth's magnetic field whilst the lower sensor measures the same field but is also more affected by any localised buried feature. The difference between the two sensors will relate to the strength of a magnetic field created by this feature, if no field is present the difference will be close to zero as the magnetic field measured by both sensors will be the same.

Factors affecting the magnetic survey may include soil type, local geology, previous human activity and disturbance from modern services.

Summary for sumogeop1-505507

OASIS ID (UID)	sumogeop1-505507
Project Name	Geophysical Survey at Land North of Streetway Road, Palestine
Sitename	
Activity type	Geophysical Survey, MAGNETOMETRY SURVEY
Project Identifier(s)	06657
Planning Id	
Reason For Investigation	Planning requirement
Organisation Responsible for work	SUMO Geophysics Ltd.
Project Dates	07-Feb-2022 - 08-Feb-2022
Location	Land North of Streetway Road, Palestine NGR : SU 26211 41073 LL : 51.1682999203065, -1.62648884748092 12 Fig : 426211,141073
Administrative Areas	Country : England County : Hampshire District : Test Valley Parish : Grateley Parish : Over Wallop
Project Methodology	A temporary grid system was established over the site and marked out using canes. The location of the grid will be set out using an RTK GPS system theoretically accurate to some 0.01m and referenced to OS co-ordinates. Hand Held: Data will be collected using a Bartington Grad 601-2. The instrument consists of two paired sensors (see below) and readings are logged at 0.25m centres along traverses 1.0m apart across 30m grids. The collection of data at 0.25m centres provides an appropriate methodology balancing cost and time with resolution as per Historic England guidelines. Two sensors mounted 1m horizontally apart and very accurately aligned to nullify the effects of the earth's magnetic field. Readings relate to the difference in localised magnetic anomalies compared with the general magnetic background.
Project Results	The magnetometer survey has recorded a curvilinear ditch-like response which has been categorised as being of possible archaeological interest. It is well-defined and could form part of a wider field system which is recorded within the vicinity of the site. Numerous linear anomalies and weak pit-like responses have also been recorded in the survey. They are generally weaker and lack the defined morphology of archaeological anomalies, hence their uncertain interpretation. However, archaeological origins for these responses should not be entirely dismissed.
Keywords	Ditch - UNCERTAIN - FISH Thesaurus of Monument Types Pit - UNCERTAIN - FISH Thesaurus of Monument Types
Funder	
HER	Hampshire Archaeology and Historic Buildings Record (AHBR) - unRev - STANDARD
Person Responsible for work	Thomas, Cockcroft
HER Identifiers	
Archives	



- Archaeological
- Geophysical
- Laser Scanning
- Measured Building
- Topographic
- Utility Mapping

SUMO Services Ltd, incorporated under the laws of England and Wales,
Company Registration No.4275993.
Registered Office Unit 8 Hayward Business Centre, New Lane, Havant, Hampshire, PO9 2NL