

# **GEOPHYSICAL SURVEY REPORT G1647**

**Land to Rear of  
7-37 Station Road,  
Foxton**

**Client:**

**GSB**  
PROSPECTION Ltd

*Celebrating over 25 years  
at the forefront of  
Archaeological Geophysics*



# GEOPHYSICAL SURVEY REPORT

Project name: Land to Rear of 7-37 Station Road, Foxton  
Job ref: G1647  
Client: CgMs Consulting Ltd  
Survey dates: 30 June 2016  
Report date: 1 July 2016  
Field Co-ordinator: Alistair Galt BA MSc PCIfA  
Field team: Dr Jennifer Peacock BA MA PhD  
Tiago Do Pereiro MSc  
Report written by: Alistair Galt BA MSc PCIfA  
CAD illustrations by: Alistair Galt BA MSc PCIfA  
Report approved by: Jon Tanner BSc MSc PCIfA  
Project Director: Dr John Gater MCIfA FSA  
Version number and issue date: V2 20 July 2016  
Amendments V2: OASIS ref. no. and Cambs HER Event No. added.



**GSB Prospection Ltd**  
Cowburn Farm 21 Market Street Thornton Bradford  
West Yorkshire BD13 3HW

T: 01274 835016 F: 01274 830212  
info@gsbsumo.com [www.gsbprospection.com](http://www.gsbprospection.com)

## TABLE OF CONTENTS

<b>1</b>	<b>SUMMARY OF RESULTS .....</b>	<b>1</b>
<b>2</b>	<b>INTRODUCTION .....</b>	<b>1</b>
<b>3</b>	<b>METHODS, DATA PROCESSING &amp; PRESENTATION .....</b>	<b>2</b>
<b>4</b>	<b>RESULTS .....</b>	<b>3</b>
<b>5</b>	<b>DATA APPRAISAL &amp; CONFIDENCE ASSESSMENT .....</b>	<b>3</b>
<b>6</b>	<b>CONCLUSION.....</b>	<b>3</b>
<b>7</b>	<b>REFERENCES .....</b>	<b>4</b>

## LIST OF FIGURES

Figure 1	1:50 000	Site Location Diagram
Figure 2	1:500	Location of Survey Area
Figure 3	1:500	Magnetometer Survey - Greyscale Plot
Figure 4	1:500	Magnetometer Survey - Interpretation

## APPENDICES

Appendix A	Technical Information: Magnetometer Survey Method
Appendix B	Technical Information: Magnetic Theory

## DIGITAL CONTENT (CD)

- Minimally Processed Greyscale Images and XY Trace Plots in DWG format
- DWG Viewer
- Digital Copies of Report Text and Figures (both PDF and native formats)

## 1 SUMMARY OF RESULTS

No anomalies of archaeological interest were detected. Two pipes were identified. Areas of magnetic disturbance and ferrous responses of modern origin are present throughout the survey.

## 2 INTRODUCTION

### 2.1 Background synopsis

GSB Prospection Ltd. was commissioned to undertake a geophysical survey of an area proposed for residential development. This survey forms part of an archaeological investigation being undertaken by **CgMs Consulting Ltd.**

### 2.2 Site Details

<b>NGR / Postcode</b>	TL408484 / CB22 6SA
<b>OASIS ref.</b>	gsbprosp1-250925
<b>Cambs HER Event</b>	ECB4731
<b>Location</b>	The site is approximately 10 kilometres south of Cambridge on the northern edge of Foxton. It is bounded by the rear of modern properties along Station Road to the east and by Burlington Industrial Park to the south.
<b>HER/SMR</b>	Cambridgeshire
<b>District</b>	South Cambridgeshire
<b>Parish</b>	Foxton
<b>Topography</b>	Flat, with trees surrounding and within the survey area.
<b>Current Land Use</b>	Grass
<b>Soils</b>	Milton (512f) association: Deep permeable calcareous fine loamy soils variably affected by groundwater. Some similar shallower well drained soils over gravel in places. Complex soil patterns locally (SSEW 1983).
<b>Geology</b>	Bedrock: Grey Chalk Subgroup - chalk. Superficial deposits River Terrace Deposits (undifferentiated) - sand and gravel (BGS 2016).
<b>Archaeology</b>	None known within the survey area. Iron Age and Romano-British remains are recorded within the vicinity, as are Saxon inhumations (CgMs 2016).
<b>Survey Methods</b>	Detailed magnetometer survey (fluxgate gradiometer)
<b>Study Area</b>	0.83ha

### 2.3 Aims and objectives

To locate and characterise any anomalies of possible archaeological interest within the study area.

### 3 METHODS, PROCESSING & PRESENTATION

#### 3.1 Standards & Guidance

This report and all fieldwork have been conducted in accordance with the latest guidance documents issued by Historic England (EH 2008) (then English Heritage) and the Chartered Institute for Archaeologists (IfA 2002 & ClfA 2014).

#### 3.2 Survey methods

Detailed magnetic survey was chosen as an efficient and effective method of locating archaeological anomalies.

Technique	Instrument	Traverse Interval	Sample Interval
Magnetometer	Bartington Grad 601-2	1m	0.25m

This project was carried out in accordance with a method statement submitted to Cambridgeshire County Council.

More information regarding this technique is included in Appendix A.

#### 3.3 Data Processing

The following schedule shows the basic processing carried out on the data used in this report:

1. *De-stripe*
2. *De-stagger*

#### 3.4 Presentation of results and interpretation

The presentation of the data for each site involves a greyscale plot of processed data. Magnetic anomalies have been identified, interpreted and plotted onto the 'Interpretation' drawings. The minimally processed data is provided as a greyscale image on the CD together with an XY trace plot in CAD format. A CAD viewer is also provided.

When interpreting the results several factors are taken into consideration, including the nature of archaeological features being investigated and the local conditions at the site (geology, pedology, topography etc.). Anomalies are categorised by their potential origin. Where responses can be related to very specific known features documented in other sources, this is done (for example: Abbey Wall, Roman Road). For the generic categories levels of confidence are indicated, for example: probable, or possible archaeology. The former is used for a confident interpretation, based on anomaly definition and/or other corroborative data such as cropmarks. Poor anomaly definition, a lack of clear patterns to the responses and an absence of other supporting data reduces confidence, hence the classification "possible".

## 4 RESULTS

- 4.1 No anomalies of archaeological interest were detected by the survey.
- 4.2 A negative linear anomaly traverses the site from north to south, with magnetically strong positive responses at regular intervals. Although the anomaly coincides with a line of trees, the response is typical of that produced by a pipe.
- 4.3 A less distinct pipe was detected amongst the extensive ferrous responses parallel to the southern boundary. These ferrous responses are caused by the adjacent boundary as well as modern activity within the survey area.
- 4.4 An area of magnetic disturbance was identified east of the pipe described in 4.2 above. This is likely to be of modern origin, related to the adjacent buildings and perhaps the pipe. Several other areas of magnetic disturbance also have relatively recent causes.
- 4.5 Ferrous responses adjacent to boundaries are normally due to fences, gates and adjacent buildings. Smaller scale ferrous anomalies ("iron spikes") are present throughout the data, and their form is best illustrated in the XY trace plots. These responses are characteristic of small pieces of ferrous debris in the topsoil and are commonly assigned a modern origin. The most prominent of these are highlighted on the interpretation diagram.

## 5 DATA APPRAISAL & CONFIDENCE ASSESSMENT


- 5.1 Historic England (then English Heritage) Guidelines (EH 2008) Table 4 states that the average magnetic response on limestones is good, but is variable on sands and gravels. The site is dominated by relatively modern disturbance, but any anomalies of archaeological origin, if present, are likely to have been detected in the north-west of the survey area.
- 5.2 The east of the survey area comprised roads, garages or was overgrown with vegetation. The northern area was densely populated by trees and thus unsuitable for survey.

## 6 CONCLUSION

- 6.1 No anomalies of archaeological potential were detected.
- 6.2 Two pipes were located.
- 6.3 Areas of magnetic disturbance and extensive ferrous responses indicate modern activity across the site.

## 7 REFERENCES

- BGS 2016      British Geological Survey, n.d., *website*:  
(<http://www.bgs.ac.uk/opengeoscience/home.html?Accordion1=1#maps>) Geology of Britain viewer. [Accessed 08/02/2016]
- CgMs 2016      *Archaeological Desk Based Assessment: Land to Rear of 7-37 Station Road, Foxton*. Unpublished report CgMs Consulting. London.
- ClfA            *Standard and Guidance for Archaeological Geophysical Survey*. ClfA Guidance note. Chartered Institute for Archaeologists, Reading  
[http://www.archaeologists.net/sites/default/files/node-files/ClfAS&GGeophysics\\_1.pdf](http://www.archaeologists.net/sites/default/files/node-files/ClfAS&GGeophysics_1.pdf)
- EH 2008      *Standard and Guidance for Archaeological Geophysical Survey*. ClfA Guidance note. Chartered Institute for Archaeologists, Reading  
[http://www.archaeologists.net/sites/default/files/node-files/ClfAS&GGeophysics\\_1.pdf](http://www.archaeologists.net/sites/default/files/node-files/ClfAS&GGeophysics_1.pdf)
- IfA 2002      *The Use of Geophysical Techniques in Archaeological Evaluations*, IFA Paper No 6, C. Gaffney, J. Gater and S. Ovenden. Institute for Archaeology, Reading
- SSEW 1983    *Soils of England and Wales. Sheet 4, Eastern England*. Soil Survey of England and Wales, Harpenden.

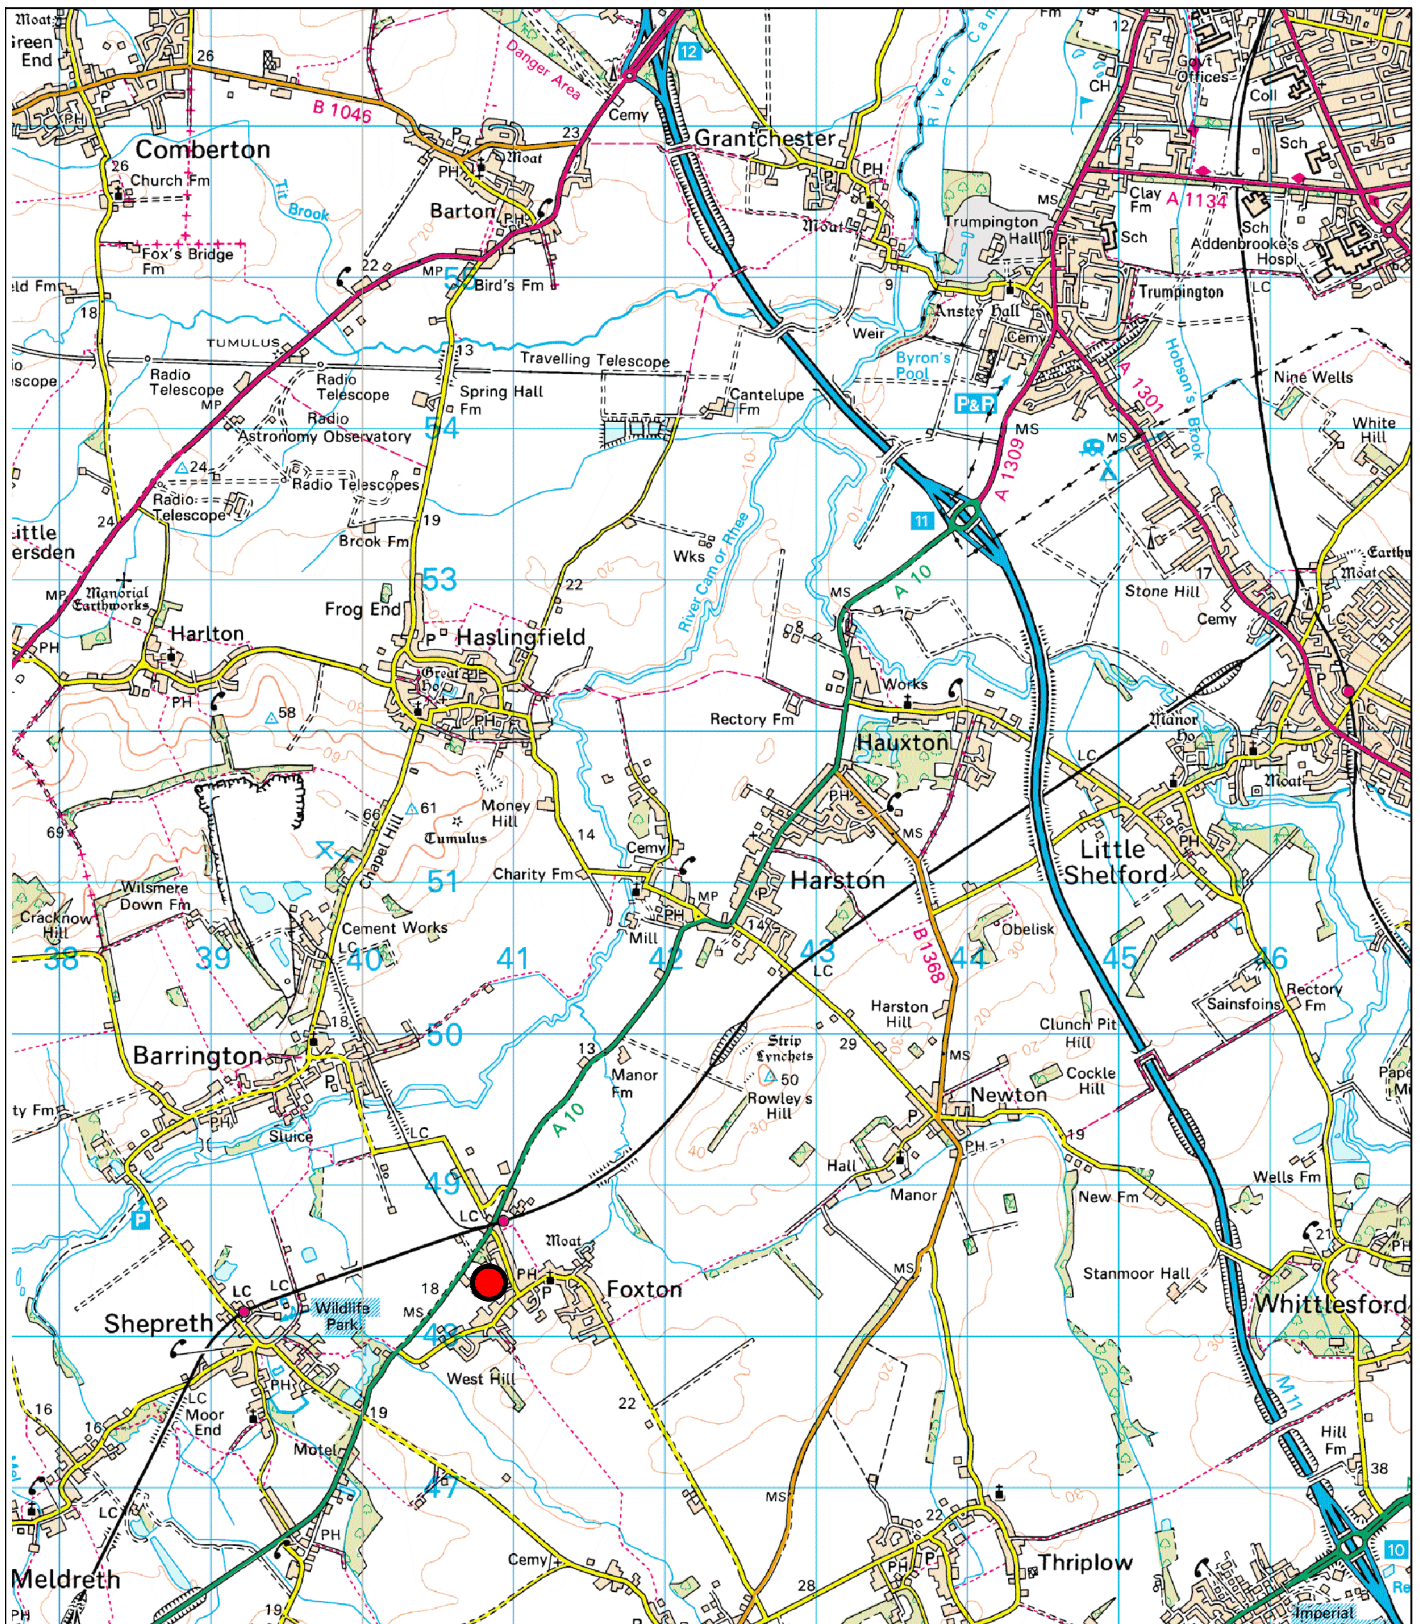

Site Location



Title:

Site Location Plan

Client:

CgMs Consulting Ltd

Project:

G1647 Land to Rear of 7-37  
Station Road, Foxton

# GSB

PROSPECTION Ltd



GSB Propection Ltd

COWBURN FARM  
21 MARKET STREET  
THORNTON  
BRADFORD  
BD13 3HW

TEL: 01274 835 016

FAX: 01274 830 212

[www.gsbprospection.com](http://www.gsbprospection.com)

Scale:





Fig No:

1



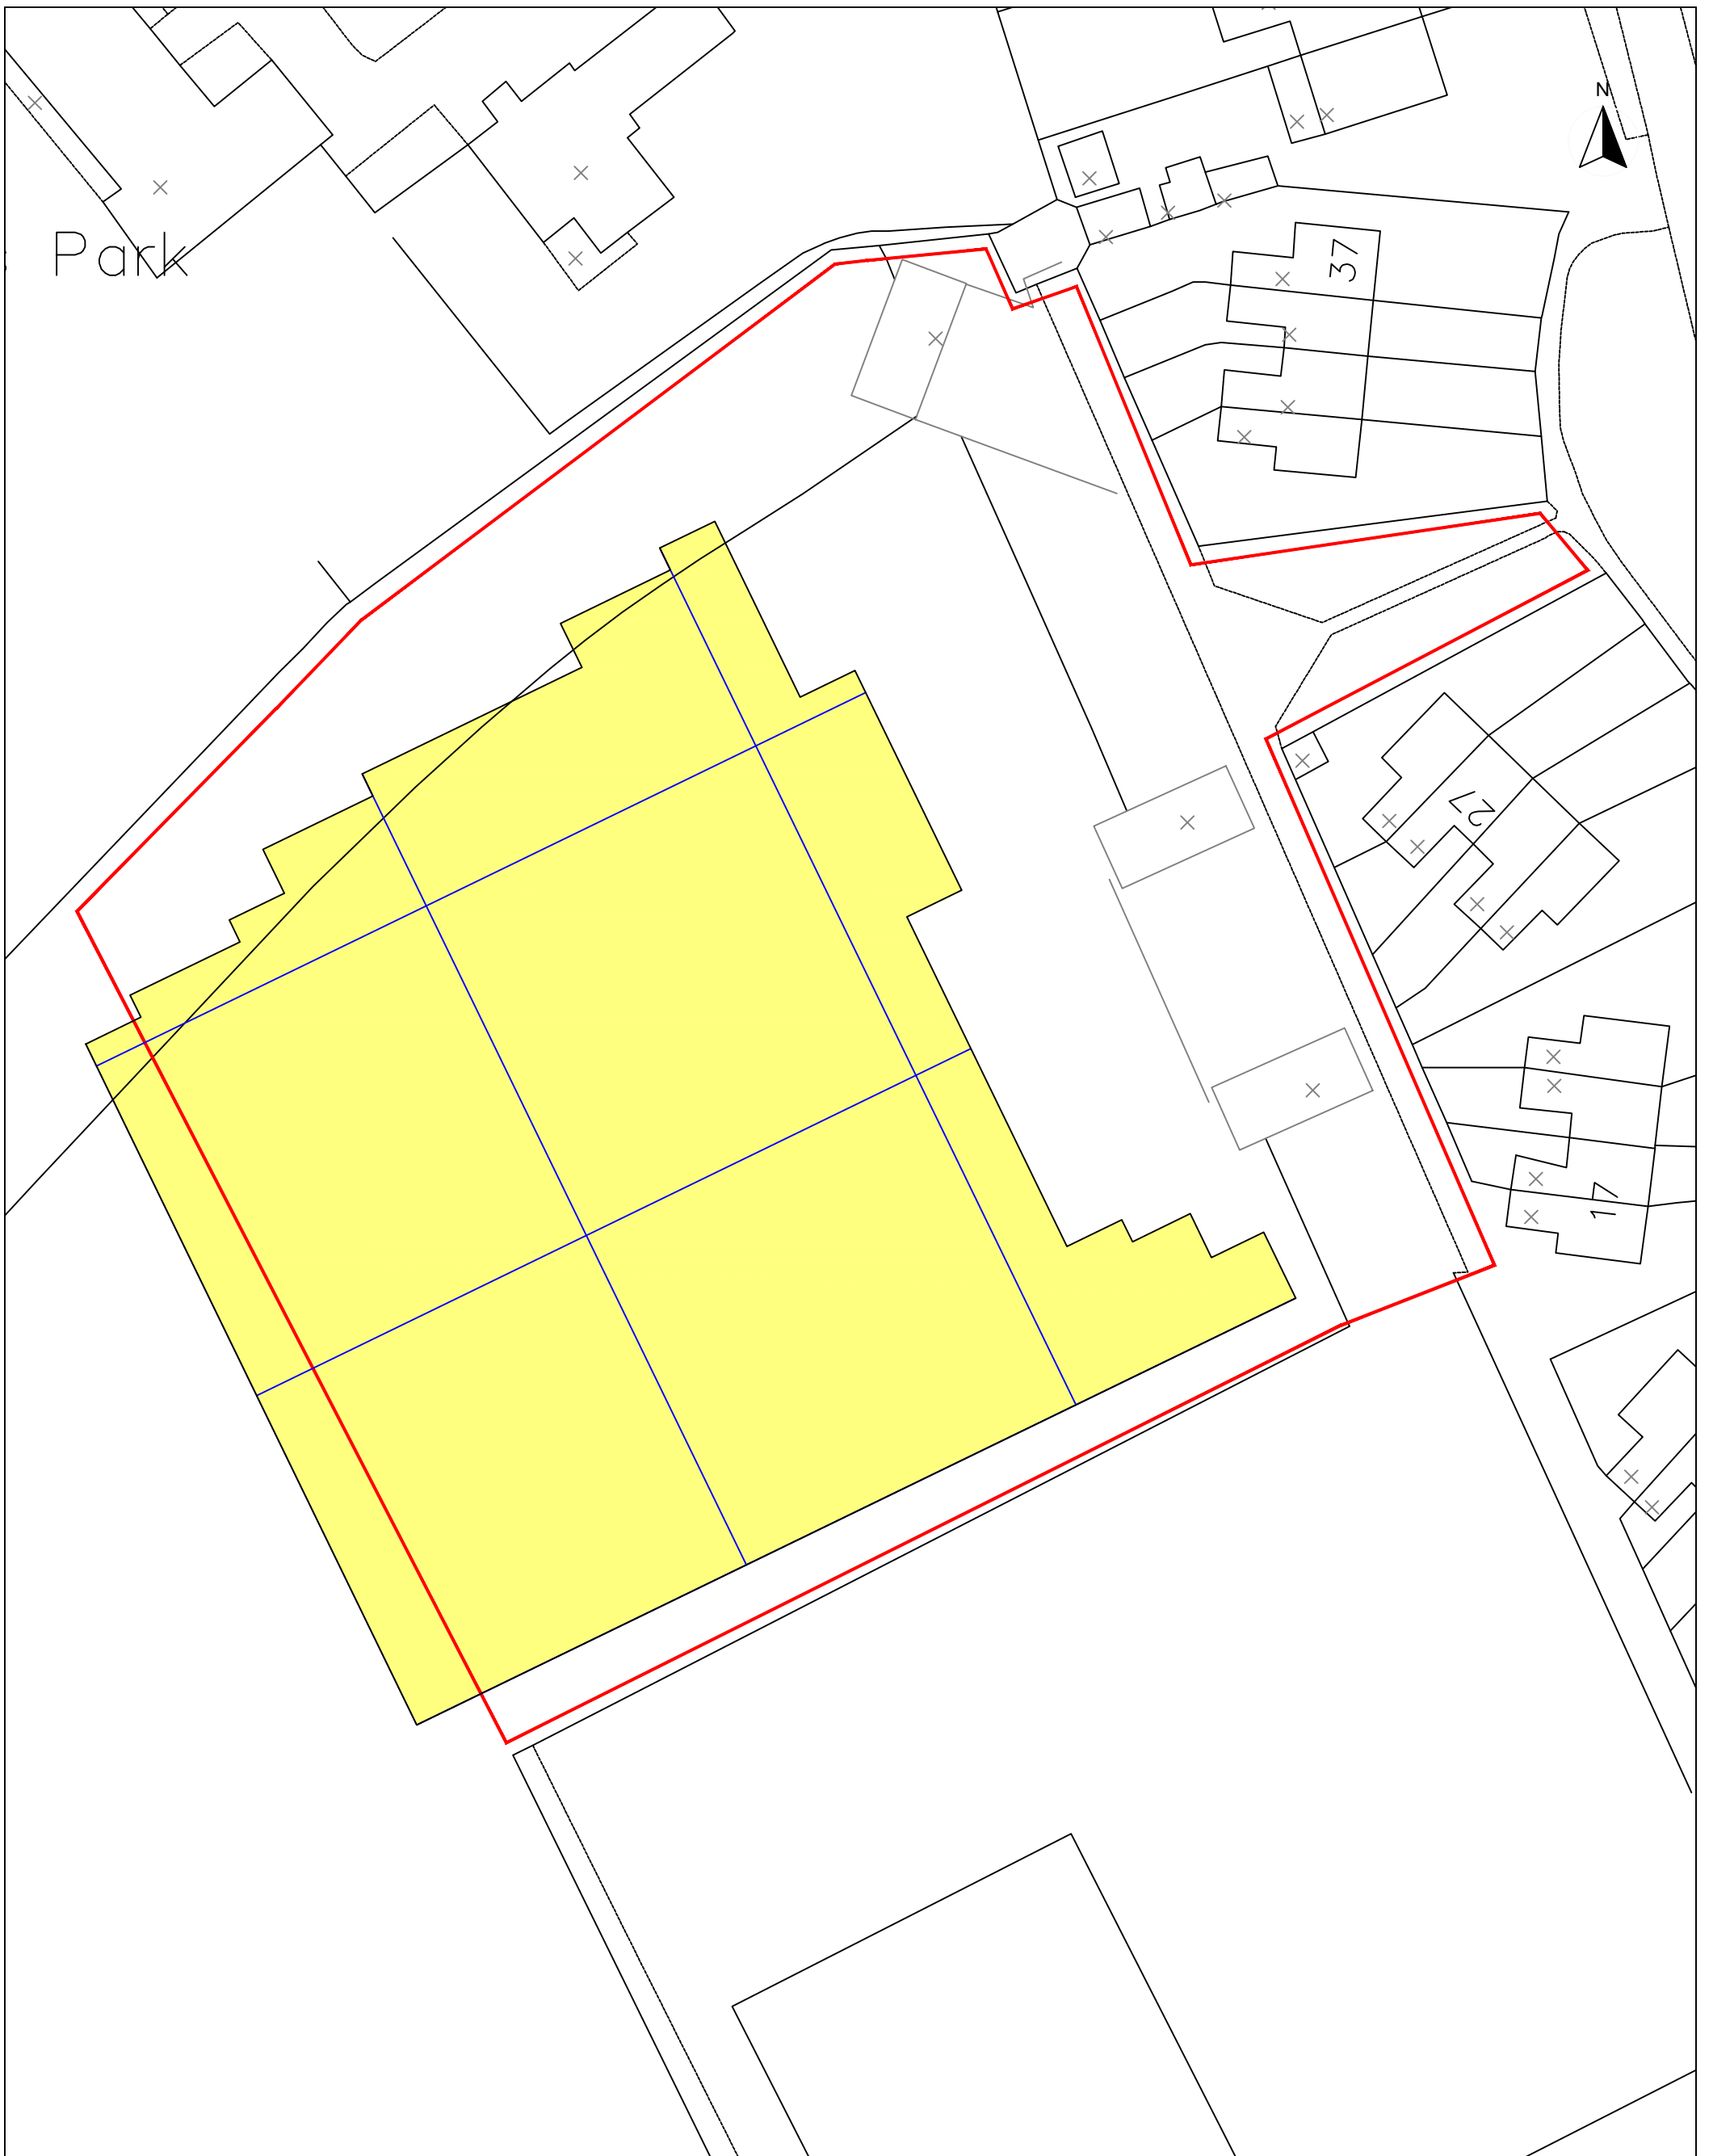

Magnetometer Survey Area  
Showing 30m Grids

**GSB**  
PROSPECTION Ltd



GSB Prospection Ltd  
COWBURN FARM  
21 MARKET STREET  
THORNTON  
BRADFORD  
BD13 3HW  
TEL: 01274 835 016  
FAX: 01274 830 212  
www.gsbprospection.com

Title:

Location of Survey Area

Client:

CgMs Consulting Ltd

Project:

G1647 Land to Rear of 7-37 Station Road,  
Foxton

Scale:





Fig No:

2






**GSB**  
PROSPECTION Ltd



GSB Prospection Ltd  
COWBURN FARM  
21 MARKET STREET  
THORNTON  
BRADFORD  
BD13 3HW  
TEL: 01274 835 016  
FAX: 01274 830 212  
www.gsbprospection.com

Title: Magnetometer Survey Greyscale Plot	
Client: CgMs Consulting Ltd	
Project: G1647 Land to Rear of 7-37 Station Road, Foxton	
Scale: 0 metres 80 1:500 @ A3	Fig No: 3



-  Pipe
-  Area of Increased Disturbance
-  Ferrous

**GSB**  
PROSPECTION Ltd



GSB Prospection Ltd  
COWBURN FARM  
21 MARKET STREET  
THORNTON  
BRADFORD  
BD13 3HW  
TEL: 01274 835 016  
FAX: 01274 830 212  
www.gsbprospection.com

Title: Magnetometer Survey Interpretation	
Client: CgMs Consulting Ltd	
Project: G1647 Land to Rear of 7-37 Station Road, Foxton	
Scale: 0 metres 80 1:500 @ A3	Fig No: 4

## Appendix A - Technical Information: Magnetometer Survey Method

### Grid Positioning

For hand held gradiometers the location of the survey grids has been plotted together with the referencing information. Grids were set out using a Trimble R8 Real Time Kinematic (RTK) VRS Now GNSS GPS system.

For CARTEASY<sup>N</sup> collected data each data point had its position recorded using a Trimble R10 Real Time Kinematic (RTK) VRS Now GNSS GPS system. The geophysical survey area is georeferenced relative to the Ordnance Survey National Grid.

An RTK GPS (Real-time Kinematic Global Positioning System) can locate a point on the ground to a far greater accuracy than a standard GPS unit. A standard GPS suffers from errors created by satellite orbit errors, clock errors and atmospheric interference, resulting in an accuracy of 5m-10m. An RTK system uses a single base station receiver and a number of mobile units. The base station re-broadcasts the phase of the carrier it measured, and the mobile units compare their own phase measurements with those they received from the base station. This results in an accuracy of around 0.01m.

Technique	Instrument	Traverse Interval	Sample Interval
Magnetometer	Bartington Grad 601-2	1m	0.25m
Magnetometer	CartEasy <sup>N</sup> cart system (Bartington Grad 601 sensors)	0.75m	0.125m

### Instrumentation: Bartington Grad601-2 / GSB CARTEASY<sup>N</sup> Cart system

Both the Bartington and CARTEASY<sup>N</sup> instruments operate in a gradiometer configuration which comprises fluxgate sensors mounted vertically, set 1.0m apart. The fluxgate gradiometer suppresses any diurnal or regional effects. The instruments are carried, or cart mounted, with the bottom sensor approximately 0.1-0.3m from the ground surface. At each survey station, the difference in the magnetic field between the two fluxgates is measured in nanoTesla (nT). The sensitivity of the instrument can be adjusted; for most archaeological surveys the most sensitive range (0.1nT) is used. Generally, features up to 1m deep may be detected by this method, though strongly magnetic objects may be visible at greater depths. The Bartington instrument can collect two lines of data per traverse with gradiometer units mounted laterally with a separation of 1.0m. The CARTEASY<sup>N</sup> system has four gradiometer units mounted at 0.75m intervals across its frame – rather than working in grids, the cart uses an on-board survey grade GNSS for positioning. The cart system allows for the collection of topographic data in addition to the magnetic field measurements.

The readings are logged consecutively into the data logger which in turn is daily down-loaded into a portable computer whilst on site. At the end of each site survey, data is transferred to the office for processing and presentation.

## **Data Processing**

Zero Mean Traverse	This process sets the background mean of each traverse within each grid to zero. The operation removes striping effects and edge discontinuities over the whole of the data set.
Step Correction (Destagger)	When gradiometer data are collected in 'zig-zag' fashion, stepping errors can sometimes arise. These occur because of a slight difference in the speed of walking on the forward and reverse traverses. The result is a staggered effect in the data, which is particularly noticeable on linear anomalies. This process corrects these errors.
Interpolation	When geophysical data are presented as a greyscale, each data point is represented as a small square. The resulting plot can sometimes have a 'blocky' appearance. The interpolation process calculates and inserts additional values between existing data points. The process can be carried out with points along a traverse (the x axis) and/or between traverses (the y axis) and results in a smoother greyscale image.

## **Display**

XY Trace Plot	This involves a line representation of the data. Each successive row of data is equally incremented in the Y axis, to produce a stacked profile effect. This display may incorporate a hidden-line removal algorithm, which blocks out lines behind the major peaks and can aid interpretation. The advantages of this type of display are that it allows the full range of the data to be viewed and shows the shape of the individual anomalies. The display may also be changed by altering the horizontal viewing angle and the angle above the plane.
Greyscale Plot	This format divides a given range of readings into a set number of classes. Each class is represented by a specific shade of grey, the intensity increasing with value. All values above the given range are allocated the same shade (maximum intensity); similarly all values below the given range are represented by the minimum intensity shade.

## Interpretation Categories

In certain circumstances (usually when there is corroborative evidence from desk based or excavation data) very specific interpretations can be assigned to magnetic anomalies (for example, *Roman Road, Wall, etc.*) and where appropriate, such interpretations will be applied. The list below outlines the generic categories commonly used in the interpretation of the results.

<i>Probable Archaeology</i>	This term is used when the form, nature and pattern of the response are clearly or very probably archaeological and /or if corroborative evidence is available. These anomalies, whilst considered anthropogenic, could be of any age.
<i>Possible Archaeology</i>	These anomalies exhibit either weak signal strength and / or poor definition, or form incomplete archaeological patterns, thereby reducing the level of confidence in the interpretation. Although the archaeological interpretation is favoured, they may be the result of variable soil depth, plough damage or even aliasing as a result of data collection orientation.
<i>Industrial / Burnt-Fired</i>	Strong magnetic anomalies that, due to their shape and form or the context in which they are found, suggest the presence of kilns, ovens, corn dryers, metal-working areas or hearths. It should be noted that in many instances modern ferrous material can produce similar magnetic anomalies.
<i>Former Field Boundary (probable &amp; possible)</i>	Anomalies that correspond to former boundaries indicated on historic mapping, or which are clearly a continuation of existing land divisions. Possible denotes less confidence where the anomaly may not be shown on historic mapping but nevertheless the anomaly displays all the characteristics of a field boundary.
<i>Ridge &amp; Furrow</i>	Parallel linear anomalies whose broad spacing suggests ridge and furrow cultivation. In some cases the response may be the result of more recent agricultural activity.
<i>Agriculture (ploughing)</i>	Parallel linear anomalies or trends with a narrower spacing, sometimes aligned with existing boundaries, indicating more recent cultivation regimes.
<i>Land Drain</i>	Weakly magnetic linear anomalies, quite often appearing in series forming parallel and herringbone patterns. Smaller drains will often lead and empty into larger diameter pipes and which in turn usually lead to local streams and ponds. These are indicative of clay fired land drains.
<i>Natural</i>	These responses form clear patterns in geographical zones where natural variations are known to produce significant magnetic distortions.
<i>Magnetic Disturbance</i>	Broad zones of strong dipolar anomalies, commonly found in places where modern ferrous or fired materials (e.g. brick rubble) are present. They are presumed to be modern.
<i>Service</i>	Magnetically strong anomalies usually forming linear features indicative of ferrous pipes/cables. Sometimes other materials (e.g. pvc) cause weaker magnetic responses and can be identified from their uniform linearity crossing large expanses.
<i>Ferrous</i>	This type of response is associated with ferrous material and may result from small items in the topsoil, larger buried objects such as pipes, or above ground features such as fence lines or pylons. Ferrous responses are usually regarded as modern. Individual burnt stones, fired bricks or igneous rocks can produce responses similar to ferrous material.
<i>Uncertain Origin</i>	Anomalies which stand out from the background magnetic variation, yet whose form and lack of patterning gives little clue as to their origin. Often the characteristics and distribution of the responses straddle the categories of <i>Possible Archaeology</i> and <i>Possible Natural</i> or (in the case of linear responses) <i>Possible Archaeology</i> and <i>Possible Agriculture</i> ; occasionally they are simply of an unusual form.

Where appropriate some anomalies will be further classified according to their form (positive or negative) and relative strength and coherence (trend: weak and poorly defined).

## Appendix B - Technical Information: Magnetic Theory

Detailed magnetic survey can be used to effectively define areas of past human activity by mapping spatial variation and contrast in the magnetic properties of soil, subsoil and bedrock. Although the changes in the magnetic field resulting from differing features in the soil are usually weak, changes as small as 0.2 nanoTeslas (nT) in an overall field strength of 48,000nT, can be accurately detected.

Weakly magnetic iron minerals are always present within the soil and areas of enhancement relate to increases in *magnetic susceptibility* and permanently magnetised *thermoremanent* material.

Magnetic susceptibility relates to the induced magnetism of a material when in the presence of a magnetic field. This magnetism can be considered as effectively permanent as it exists within the Earth's magnetic field. Magnetic susceptibility can become enhanced due to burning and complex biological or fermentation processes.

Thermoremanence is a permanent magnetism acquired by iron minerals that, after heating to a specific temperature known as the Curie Point, are effectively demagnetised followed by re-magnetisation by the Earth's magnetic field on cooling. Thermoremanent archaeological features can include hearths and kilns and material such as brick and tile may be magnetised through the same process.

Silting and deliberate infilling of ditches and pits with magnetically enhanced soil creates a relative contrast against the much lower levels of magnetism within the subsoil into which the feature is cut. Systematic mapping of magnetic anomalies will produce linear and discrete areas of enhancement allowing assessment and characterisation of subsurface features. Material such as subsoil and non-magnetic bedrock used to create former earthworks and walls may be mapped as areas of lower enhancement compared to surrounding soils.

Magnetic survey is carried out using a fluxgate gradiometer which is a passive instrument consisting of two sensors mounted vertically 1m apart. The instrument is carried about 30cm above the ground surface and the top sensor measures the Earth's magnetic field whilst the lower sensor measures the same field but is also more affected by any localised buried field. The difference between the two sensors will relate to the strength of a magnetic field created by a buried feature, if no field is present the difference will be close to zero as the magnetic field measured by both sensors will be the same.

Factors affecting the magnetic survey may include soil type, local geology, previous human activity, disturbance from modern services etc.

# **GSB**

## **PROSPECTION Ltd**

Celebrating over 25 years at the  
forefront of archaeological geophysics



Tel: +44 (0)1274 835016  
Fax: +44 (0)1274 830212  
Email: [info@gsbsumo.com](mailto:info@gsbsumo.com)  
Web: [www.gsbprospection.com](http://www.gsbprospection.com)