

Substrata

Archaeological Geophysical Surveyors

An archaeological gradiometer survey

Land at Hollafrench Farm,
North Tamerton,
Cornwall

OS grid ref: (centred on) 231881, 99562

Report: 140417

Ross Dean BSc MSc MA MifA

22 April 2013

Substrata
Archaeological Geophysical Surveyors
15 Horizon View, Bath Hotel Road
Westward Ho!
Bideford
Devon EX39 1GX
Email: geophysics@substrata.co.uk
Web: www.substrata.co.uk

Client:
South West Archaeology Ltd
The Old Dairy,
Hacche Lane Business Park
Pathfields Business Park,
South Molton
Devon EX36 3LH
Tel: 01769 573555
Email: mail@swarch.net

Contents

1. Survey description and summary	1
2. Site description	2
3. Results, discussion and conclusions	3
4. Disclaimer and copyright	7
5. Acknowledgements	7
6. References	7
Appendix 1 Supporting plots	10
Appendix 2 Methodology	12
Appendix 3 Data processing	13
Appendix 4 Geophysical survey techniques	14

Figures

Figure 1: survey interpretation	5
Figure 2: shade plot of processed data	10
Figure 3: site location plan	11

Tables

Table 1: gradiometer data analysis	4
Table 2: methodology	12
Table 3: processed gradiometer data metadata	13

Accompanying CD-ROM

Report	Adobe PDF format
Copies of report figures	Adobe PDF format
Data Files and grid plan	grid files generated using DW Consulting TerraSurveyor3
Minimal processing data plots and metadata	Adobe PDF format
GIS project, shape files and classification schema	
GIS project and shape files	ESRI standard
GIS classification schema	Adobe PDF format
Georeferenced AutoCAD version of survey interpretation	AutoCAD DWG format

1 Survey description and summary

Type of survey: twin-sensor fluxgate gradiometer

Date of survey: 14th December 2012

Area surveyed: 1.44ha

Lead surveyor: Ross Dean BSc MSc MA MifA

Client

South West Archaeology Ltd, The Old Dairy, Hacche Lane Business Park, Pathfields Business Park, South Molton, Devon EX36 3LH

Location

Site: Hollafrench Farm
Town and parish: North Tamerton
County: Cornwall
NGR: SS 381 043
NG coordinates: 238124, 104324
OASIS number: substrat1-148681
Survey archive: The archive of this survey will be held by Substrata.

Summary

This report was commissioned by South West Archaeology Ltd on behalf of clients and was produced by Substrata in preparation for submission of a forthcoming planning application

The magnetic contrast across the survey areas was sufficient to be able to differentiate between anomalies representing possible archaeological features and background magnetic responses. A total of nine magnetic anomaly groups were identified as pertaining to potential archaeology

Eight of the anomaly groups are linear and may represent one or more phases of former field boundaries, enclosure boundaries or similar archaeological deposits. One group represents former ridge-and-furrow ploughing that appears to disrupt two of the linear groups.

Survey aims

1. Define and characterise and detectable archaeological remains on the site.
2. Inform any future archaeological investigation of the area.

Survey Objectives

1. Complete a gradiometer survey across agreed parts of the survey area.
2. Identify any magnetic anomalies that may be related to archaeological deposits, structures or artefacts.
3. Within the limits of the techniques and dataset, archaeologically characterise any such anomalies or patterns of anomalies.
4. Accurately record the location of the identified anomalies.
5. Produce a report based on the survey that is sufficiently detailed to inform any subsequent development on the site about the location and possible archaeological character of the recorded anomalies.

Standards

The standards used to complete this survey are defined by the Institute for Archaeologists (2011). The codes of approved practice that were followed are those of the Institute for Archaeologists (2008 and 2009) and Archaeology Data Service/Digital Antiquity Guides (undated). The document text was written using the house style of the Institute for Archaeologists (Institute for Archaeologists, undated).

2 Site description

Landscape

The site comprises parts of three large fields (figure 2) bordered by a small stream and valley to the south and a spur of ground to the north. The survey area rises from approximately 95m in the east to 125m O.D. in the west as shown in figure 3.

Land use at the time of the survey

Grass pasture (western and eastern fields) and recently seeded and rolled crops (central field)

Geology and soils

The site is located on a solid geology of the Carboniferous Crackington Formation. These rocks are rhythmically bedded, dark blue-grey mudstones and subordinate predominantly grey sandstones and siltstones. Sandstone percentage varies from 20-75%, both vertically and geographically (British Geological Survey, undated 1; undated 2).

The soils are of the Hallsworth1 association (Soil Survey of England and Wales, 1983) which mainly consists of pelo-stagnogley soils, slowly permeable clayey soils resting on shales and shaley Head (Findley et al, 1983: 193-4).

Known archaeological sites in the survey area

There are no Historical Environment Record within the survey area.

Previous fieldwork within the survey area

No formal archaeological work has been undertaken on the survey site.

3. Results, discussion and conclusions

This survey was designed to record magnetic anomalies. The anomalies themselves cannot be regarded as actual archaeological features and the dimensions of the anomalies shown do not represent the dimensions of any associated archaeological features. The analysis presented below attempts to identify and characterise anomalies and anomaly groups that may pertain to archaeological deposits and structures.

The reader is referred to section 4.

3.1 Results

Figure 1 shows the interpretation of the survey and table 1 is an extract from a detailed analysis of the survey data provided in the attribute tables of the GIS project on the accompanying CD-ROM.

Figures 1 and table 1 comprise the analysis and interpretation of the survey data.

The processed gradiometer data is presented in figure 2, appendix 1.

Survey data analysis

Site: An archaeological gradiometer survey
 Land at Hollafrench Farm, North Tamerton, Holsworthy, Devon
 OS grid ref: (centred on) 231881, 99562
 Report 130417

anomaly group	characterisation certainty	anomaly class	anomaly form	additional archaeological characterisation	comments
1	possible	positive	linear		
2	possible	negative	linear	archaeological deposits or field drains	anomalies reflect a series of linears intersecting a curvilinear
3	possible	positive	curvilinear		
4	possible	positive	linear		
5	possible	positive	linear		
6	possible	positive	linear		
7	possible	negative	linear		anomalies correspond with a slight earthwork - possible plough headland
8	possible	negative	linear		
1001	possible	repeated parallel		cultivation traces	relatively recent ploughing
1002	possible	repeated parallel		cultivation traces	ridge-and-furrow ploughing

Table 1: data analysis

An archaeological gradiometer survey
 Land at Hollafrench Farm
 North, Tamerton, Cornwall
 OS grid ref: (centred on) 231881, 99562
 Report 130417



Legend

- gradiometer survey area
- potential archaeology**
- possible archaeology, positive anomaly
- possible archaeology, negative anomaly
- possible archaeology, mixed spread
- possible archaeology, repeated parallels (2)
- gradiometer services and modern**
- possible modern, field drains
- possible service, service trench
- possible modern, ferrous items

Notes:

1. All interpretations are provisional and represent potential archaeological deposits.
2. Representative of trends; only anomalies relevant to potential archaeology are recorded.
3. Anomalies likely to represent very recent ground disturbance are not highlighted.
4. Anomalies designated "likely archaeology" have supporting evidence e.g. historical maps and/or visible earthworks.

While accurate, this figure is intended for use as a reference in the accompanying report and not as a source of positional information.

It is recommended that accurate positional information be obtained from the georeferenced GIS project or AutoCAD plan of the survey interpretation found on the accompanying CD-ROM.

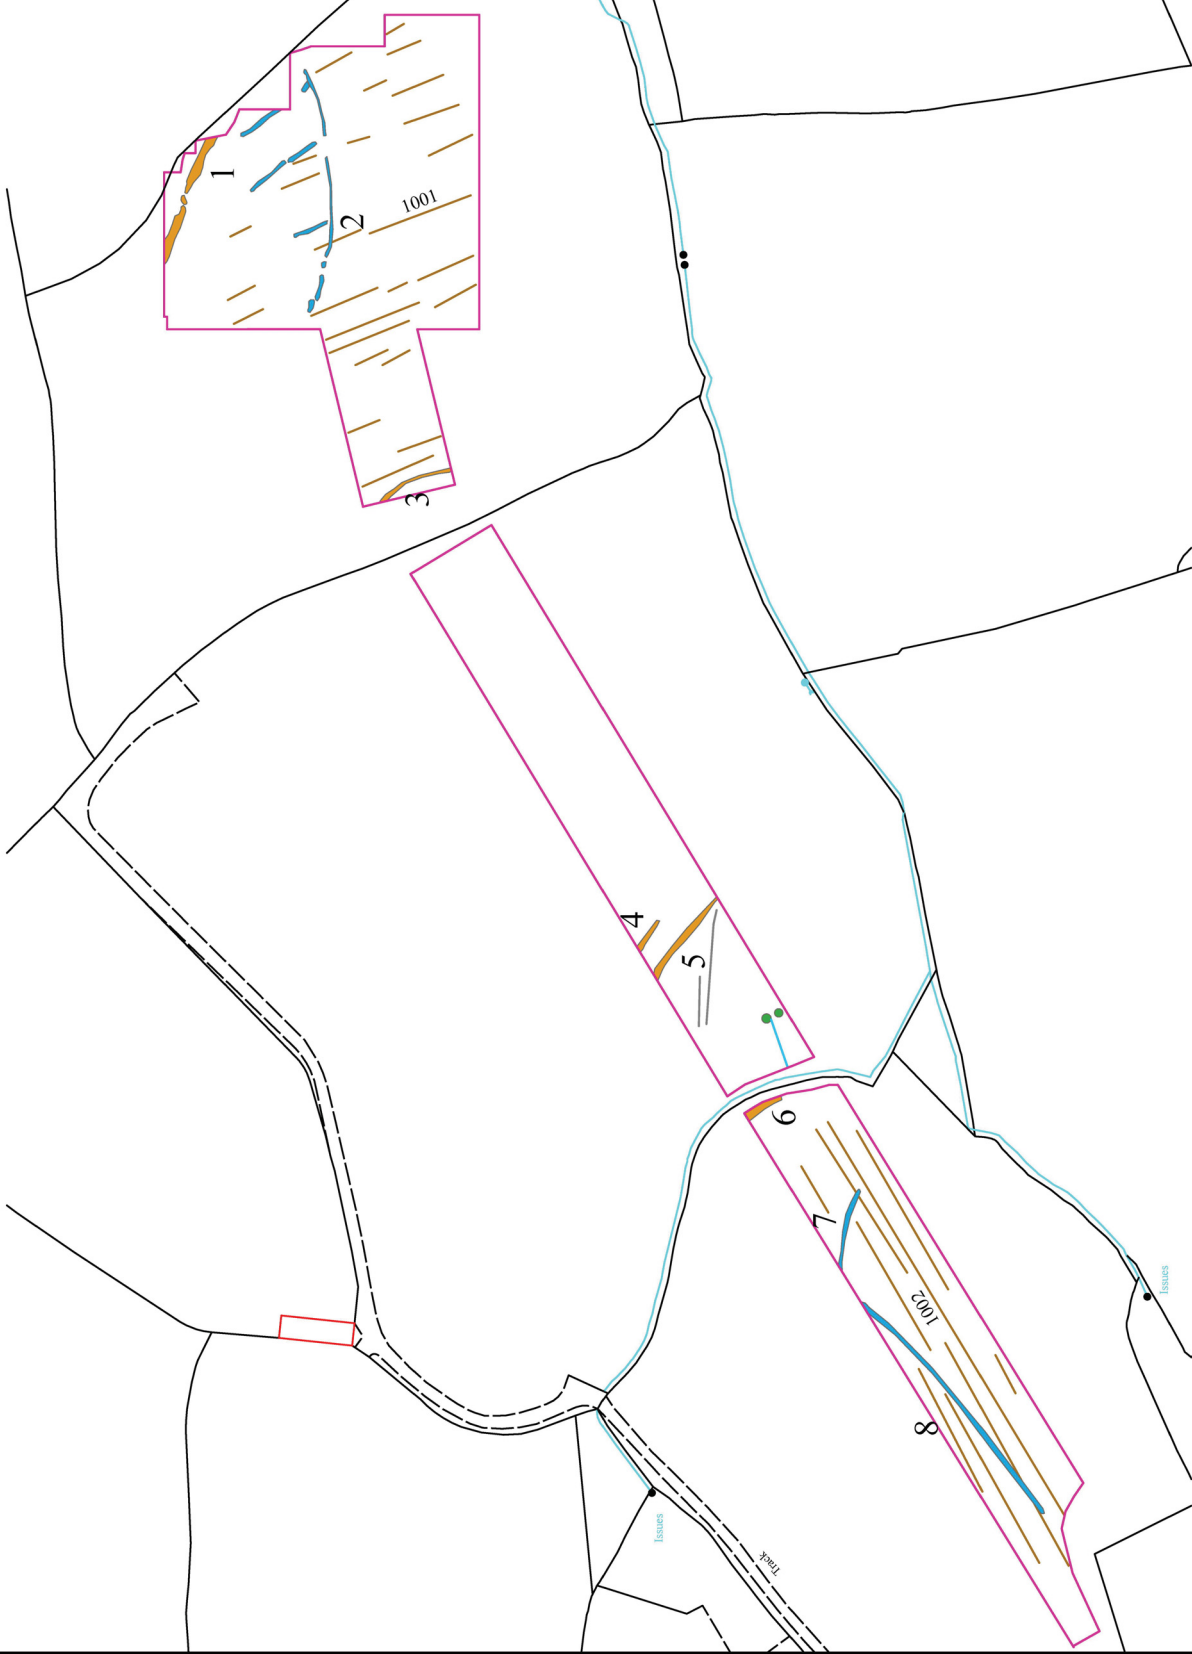


Figure 1: survey interpretation

3.2 Discussion

Refer to figures 1 and 2

Not all anomalies or anomaly groups identified in the survey dataset are discussed below. All identified anomaly groups are recorded in the GIS project on the accompanying CD-ROM. Those anomaly groups possibly representing archaeological deposits are included in data analysis table 1.

Data related to historical maps

None of the anomalies relating to potential archaeological deposits or features could be associated with features recorded on historical Ordnance Survey maps.

Data with no previous provenance

Anomaly groups, groups 1 to 8 may represent archaeological linear features, possibly field boundaries or other enclosures. They may represent more than one phase of past land management.

Of these, anomaly group 2 may represent field drains rather than archaeological features. Only further investigations will establish whether or not this is the case.

Anomaly group 1002 is likely to represent former ridge-and-furrow ploughing. The deposits represented by anomaly groups 7 and 8 appear to be disrupted by the ridge-and-furrow ploughing.

3.3 Conclusions

The magnetic contrast across the survey areas was sufficient to be able to differentiate between anomalies representing possible archaeological features and background magnetic responses. A total of nine magnetic anomaly groups were identified as pertaining to potential archaeology

Eight of the anomaly groups are linear and may represent one or more phases of former field boundaries, enclosure boundaries or similar archaeological deposits. One group represents former ridge-and-furrow ploughing that appears to disrupt two of the linear groups.

4 Disclaimer and copyright

The description and discussion of the results presented in this report are the authors, based on his interpretation of the survey data. Every effort has been made to provide accurate descriptions and interpretations of the geophysical data set. The nature of archaeological geophysical surveying is such that interpretations based on geophysical data, while informative, can only be provisional. Geophysical surveys are a cost-effective early step in the multi-phase process that is archaeology.

The evaluation programme of which this survey is part may also be informed by other archaeological assessment work and analysis. It must be presumed that more archaeological features will be evaluated than those specified in this report.

Ross Dean, trading as Substrata, will assign copyright to the client upon written request but retains the right to be identified as the author of all project documentation and reports as defined in the Copyright, Designs and Patents Act 1988 (Chapter IV, s.79).

5 Acknowledgements

Substrata would like to thank Colin Humphreys of Southwest Archaeology Ltd for commissioning us to complete this survey.

6 References

Archaeology Data Service/Digital Antiquity Guides to Good Practice (undated): *Geophysical Data in Archaeology* [Online], Available: http://guides.archaeologydataservice.ac.uk/g2gp/Geophysics_Toc [March 2013]

British Geological Survey (undated) *Digital Geological Map of Great Britain (DiGMapGB-625) dataset at 1:625 000* [Online], Available: <http://www.bgs.ac.uk/discoveringGeology/geologyOfBritain/viewer.html> [April 2013]

British Geological Survey (undated 2) *The British Geological Survey Lexicon of Named Rock Units* [Online], Available: <http://www.bgs.ac.uk/lexicon/home.html> [April 2013]

Clark, A. (2000) *Seeing Beneath the Soil, Prospecting methods in archaeology*, London: Routledge

Dean, R. (2013) *A gradiometer survey project design: Land at Hollafrench Farm, Cornwall, OS grid ref: (centred on) 231881 99562*, Unpublished Substrata document

Findlay, D.C., Colborne, G.J.N., Cope, D.W., Harrod, T.R., Hogan, D.V. and Staines, S.J. (1984) *Soil survey of England and Wales bulletin 14 Soils and their use in south west England*, Harpenden: The Soil Survey of England and Wales

Institute for Archaeologists (undated) *IfA house style*, [Online], Available: http://www.archaeologists.net/sites/default/files/node-files/ifa_house_style.pdf [December 2012]

Institute for Archaeologists (2011) *Standard and guidance archaeological geophysical survey*. Reading: Author [Online], Available: <http://www.archaeologists.net/sites/default/files/node-files/Geophysics2010.pdf> [April 2013]

Institute for Archaeologists (2009) *Code of conduct*. Reading: Author [Online], Available: http://www.archaeologists.net/sites/default/files/node-files/code_conduct.pdf [April 2013]

Institute for Archaeologists (2008) *Code of approved practice for the regulation of contractual arrangements in archaeology*. Reading: Author [Online], Available: http://www.archaeologists.net/sites/default/files/node-files/ifa_code_practice.pdf [April 2013]

Soil Survey of England and Wales (1983) *Soils of South West England Sheet 5* 1:250 000, Southampton: Ordnance Survey

Appendix 1 Supporting plots

General Guidance


The anomalies represented in the survey plots provided in this appendix are magnetic anomalies. The apparent size of such anomalies and anomaly patterns are unlikely to correspond exactly with the dimensions of any associated archaeological features.

A rough rule for interpreting magnetic anomalies is that the width of an anomaly at half its maximum reading is equal to the width of the buried feature, or its depth if this is greater (Clark, 2000: 83). Caution must be applied when using this rule as it depends on the anomalies being clearly identifiable and distinct from adjacent anomalies. In northern latitudes the position of the maximum of a magnetic anomaly will be displaced slightly to the south of any associated physical feature.



Legend

gradiometer survey processed data (nT)



While accurate, this figure is intended for use as a reference in the accompanying report and not as a source of positional information.

It is recommended that accurate positional information be obtained from the georeferenced GIS project or AutoCAD plan of the survey interpretation found on the accompanying CD-ROM.

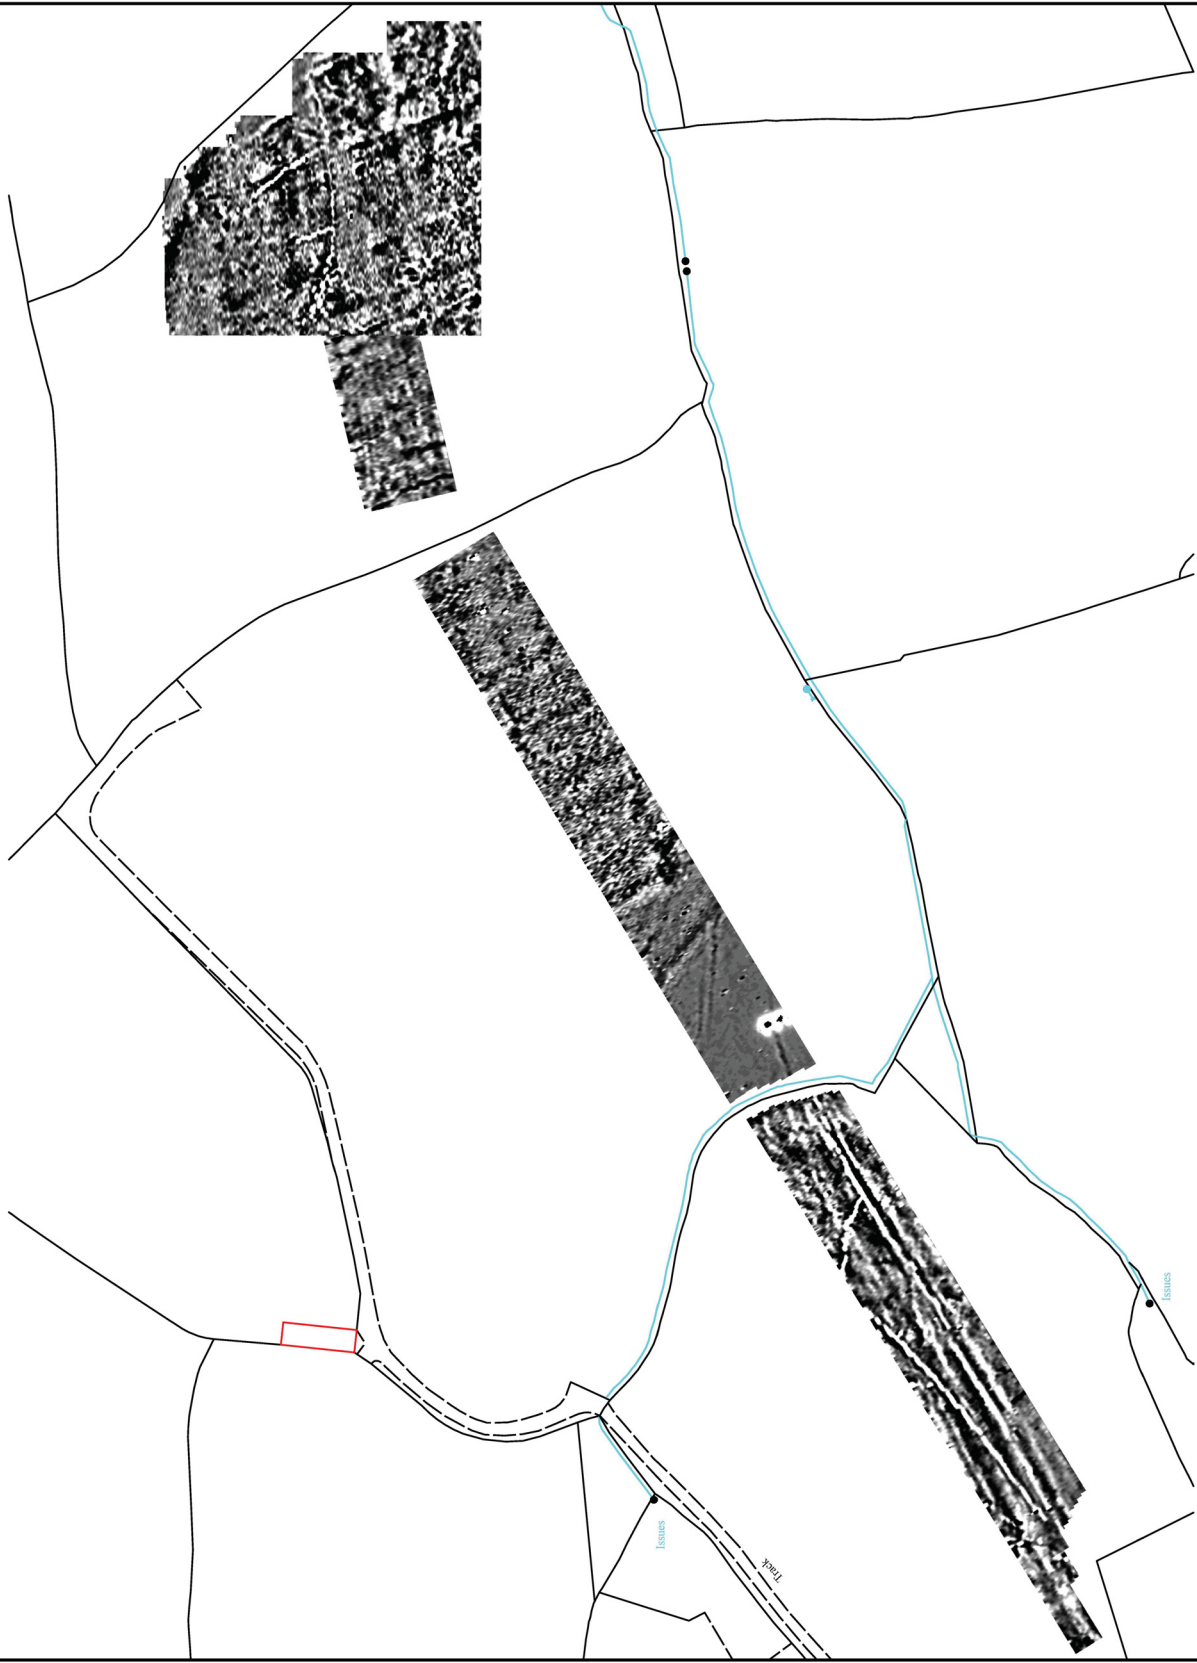


Figure 2: shade plot of processed data

DRAWING TITLE
Jose
wind turbine location

NOTES

● Turbine location

Map scale:
1:10,000 when printed at A3



Cleanearth Energy
108 Palmers Way
Trenant Industrial Estate
PL27 6HB
01208 455028

CE NUMBER CE101030

DATE 25/09/12

SHEET 1 of 1

SCALE 1:10,000

DRAWING CE101030-SC-TL

CLIENT Mr. Jose

INSTALLATION ADDRESS
Hollanfrench,
North Tarnerton,
Holsworthy,
EX22 6SF

DRAWN BY JM


CHECKED BY XX

APPROVED BY XX

DATE 25/09/12

DATE 25/09/12

DATE 25/09/12

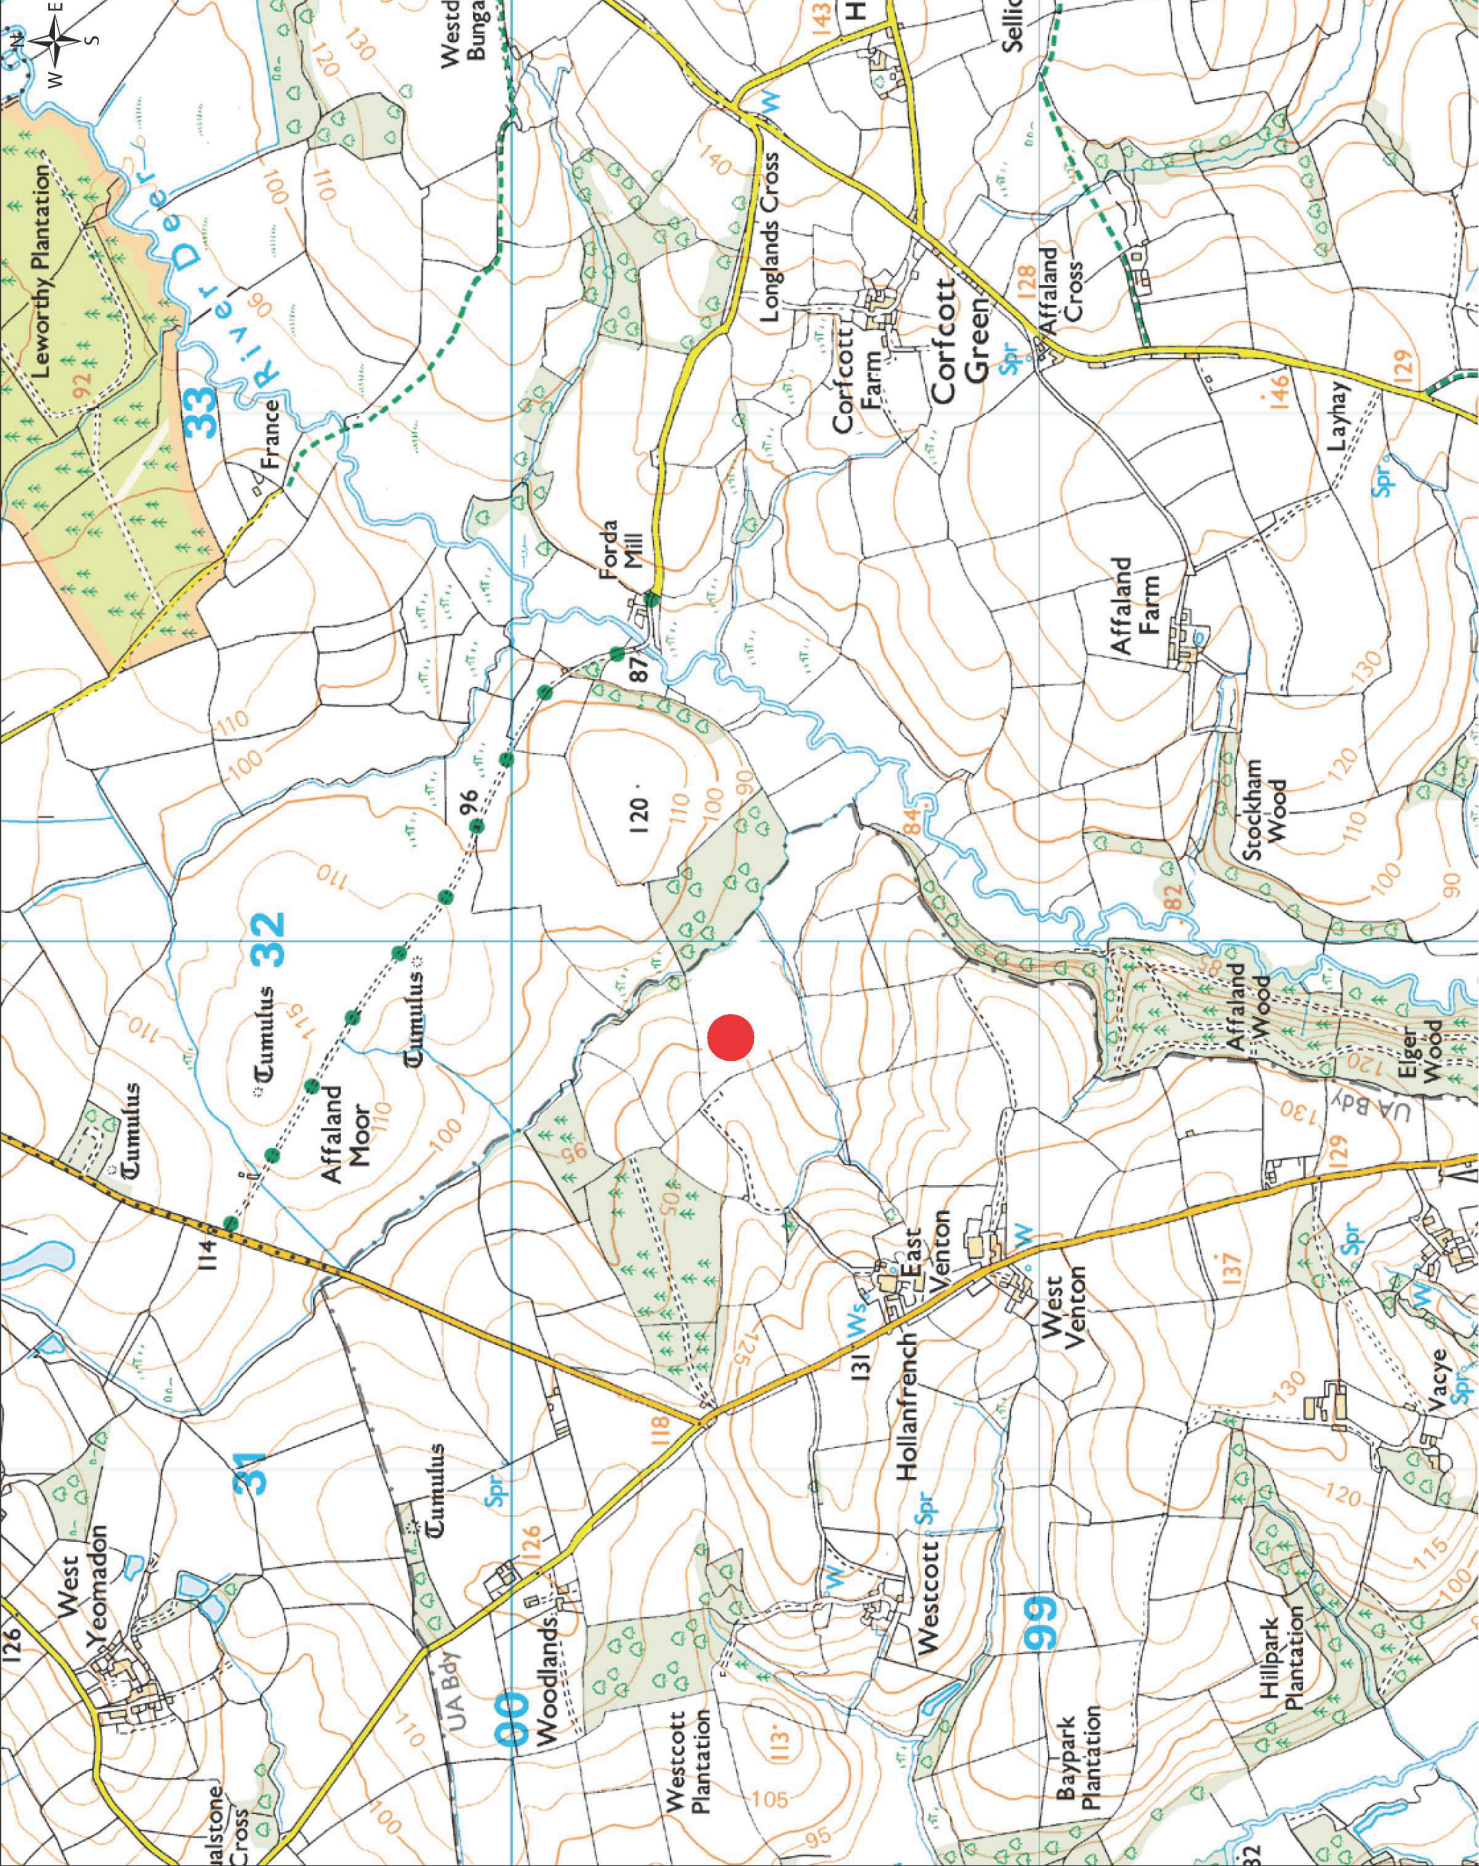

Appendix 2 Methodology

Table 2: methodology	
<p>Documents Project design: Dean (2013)</p>	
<p>Methodology</p> <ol style="list-style-type: none"> 1. The work was undertaken in accordance with the project design. The geophysical (gradiometer) survey was undertaken with reference to standard guidance provided by the Institute for Archaeologists (2011) and Archaeology Data Service/Digital Antiquity Guides (undated). 2. The survey grid location information and grid plan was recorded as part of the project in a suitable GIS system. 3. Data processing was undertaken using appropriate software, with all anomalies being digitised and geo-referenced. The final report included a graphical and textual account of the techniques undertaken, the data obtained and an archaeological interpretation of that data and conclusions about any likely archaeology. 	
<p>Grid <i>Method of Fixing:</i> DGPS set-out using pre-planned survey grids and Ordnance Survey coordinates. <i>Composition:</i> 30m by 30m grids <i>Recording:</i> Geo-referenced and recorded using digital map tiles.</p>	
<p>Equipment <i>Instrument:</i> Bartington Instruments grad601-2 <i>Firmware:</i> version 6.1</p>	<p>Data Capture <i>Sample Interval:</i> 0.25-metres <i>Traverse Interval:</i> 1 metre <i>Traverse Method:</i> zigzag <i>Traverse Orientation:</i> GN with variations (figure 1)</p>
<p>Data Processing, Analysis and Presentation Software DW Consulting TerraSurveyor3 ArcGIS 9.3 Microsoft Corp. Office Publisher 2003.</p>	

Appendix 3 Data processing

Table 3: gradiometer survey - processed data metadata	
Software: DW Consulting TerraSurveyor 3.0.19.16	
Stats	
Max:	251.36
Min:	-203.26
Std Dev:	8.96
Mean:	0.38
Median:	0.02
Surveyed Area:	2.1121 ha
Processes:	6
1	Base Layer
2	Clip at 4.00 SD
3	DeStripe Median Sensors: All
4	De Stagger: Grids: hf09.xgd hf12.xgd hf13.xgd hf10.xgd hf14.xgd hf11.xgd Mode: Both By: -3 intervals
5	De Stagger: Grids: hf24.xgd hf25.xgd hf26.xgd hf27.xgd hf28.xgd Mode: Both By: -3 intervals
6	Interpolate: Match X & Y Doubled.

Appendix 4 Geophysical surveying techniques

1 Introduction

Substrata offers magnetometer and earth resistance surveying. We also provide other archaeology-specific geophysical surveys such as ground penetrating radar and resistivity. The particular method or combination of methods used depends on local soil conditions and the survey requirements. These methods are capable of delivering fast and accurate assessments of the archaeology of both large and small sites.

Further details can be found on our website at www.substrata.co.uk

2 Magnetometer surveying

Standard magnetometer surveys are the workhorse of archaeological surveying when speed and cost-effectiveness are important. Identifiable archaeological features include areas of occupation, hearths, kilns, furnaces, ditches, pits, post-holes, ridge-and-furrow, timber structures, wall footings, roads, tracks and similar buried features.

Magnetometer surveying is used to detect and map small changes in the earth's magnetic field caused by concentrations of ferrous-based minerals within the soil and subsoil, and by magnetised materials buried beneath the surface. While most of these changes are too small to affect a compass needle, they can be detected and mapped by sensitive field equipment. During surveys the different magnetic properties of top-soils, sub-soils, rock formations and archaeological features are recorded as variations against a background value. Subsequently magnetic anomalies resulting from potential archaeology can be identified and interpreted.

Bartington grad601-2 gradiometers

A gradiometer is a type of magnetometer and is sensitive to relatively small changes in the earth's magnetic field. Our primary surveying instruments are Bartington Grad601-2 (dual sensor) fluxgate gradiometers with automatic data loggers. They are specifically designed for field use by archaeologists. The Bartington gradiometers provide proven technology in archaeological magnetic surveying and offer fast, accurate set-up and survey rates. They are sensitive to depths of between 0 and 1.5m below ground level, with optimum sensitivity at depths of 1m or less.

Multiple sensor arrays

A technique relatively new to commercial archaeological surveying but well understood in academic circles involves the use of multiple magnetometer sensors towed behind a quad bike or similar vehicle. With multiple sensors and the use of on-board GPS units, it is possible to achieve faster survey rates at competitive commercial rates when compared to the use of multiple instruments and the techniques discussed above provided the ground is suitable for the vehicle and array. Substrata is pleased to announce that we now offer this service on suitable larger sites

3 Earth resistance surveying

Earth resistance surveying is an excellent tool for detecting buried archaeology. Its relatively slow rate of survey compared to magnetometer surveys means that it is usually employed in commercial surveys when a detailed understanding of buried building remains is required. This technique measures changes in the electrical resistance of the ground being surveyed. In practice, the recording of differences in the electrical resistance of near-surface deposits and structures allows the detection and interpretation of masonry and brick foundations, paving and floors, drains and other cavities, large pits, building platforms, robber trenches, ditches, graves and similar buried features.

Resistance to electrical current flow in the ground depends on the moisture content and

structure of the soil and other materials buried beneath the surface. For example, the higher the moisture content of a soil, the less resistant it is to electrical current flow. A ditch completely buried beneath the present ground surface is likely to have an infill soil different to that surrounding the ditch in terms of compactness and composition. As a result, the soil filling the buried ditch will retain moisture in a different way to the surrounding soil which means it will have an electrical resistance at variance with the surrounding environment. By passing a small current through the ground it is possible to detect, record, plot and interpret such changes in electrical resistance.

For earth resistance surveying Substrata uses the Geoscan Research RM15 series multi-probe resistance meters and purpose-built automatic data-loggers. The Geoscan MPX15 multiplexer is an integral part to the instrument configuration and facilitates multi-probe arrays which speed up survey area coverage rates and, if required, facilitate simultaneous multiple-depth data collection.