

Project name: Lymington, Hampshire

Client:

Southampton City Council

July 2015

Job ref: J8649

Report author: Thomas Richardson MSc ACIfA

GEOPHYSICAL SURVEY REPORT

Project name:

Lymington, Hampshire

Client:

Southampton City Council

Job ref: Field team:

J8649 Richard Collins BA (Hons), Jack Larner,

Christian Adams BA (Hons)

Simon Haddrell BEng(Hons) AMBCS PCIFA

Techniques: Project manager:

Detailed magnetic survey -

Gradiometry

Survey date: Report written By:

1st July 2015 Thomas Richardson MSc ACIFA

Site centred at: CAD illustrations by:

SZ 313 962 Thomas Richardson MSc ACIFA

Post code: Checked by:

SO41 8NP David Elks MSc ACIFA

TABLE OF CONTENTS

| LIS | ST OF FIGURES2 | | | | | |
|-----|--|--|-----|--|--|--|
| 1 | SUN | 1MARY OF RESULTS | 3 | | | |
| 2 | INTE | RODUCTION | 3 | | | |
| | 2.1 | Background synopsis | . 3 | | | |
| | 2.2 | Site location | . 3 | | | |
| | 2.3 | Description of site | . 3 | | | |
| | 2.4 | Geology and soils | . 3 | | | |
| | 2.5 | Site history and archaeological potential | . 3 | | | |
| | 2.6 | Survey objectives | . 4 | | | |
| | 2.7 | Survey methods | . 4 | | | |
| | 2.8 | Processing, presentation and interpretation of results | . 4 | | | |
| | 2.8. | 1 Processing | . 4 | | | |
| | 2.8.2 | 2 Presentation of results and interpretation | . 4 | | | |
| 3 | RES | ULTS | 5 | | | |
| | 3.1 | Probable Archaeology | . 5 | | | |
| | 3.2 | Possible Archaeology | . 5 | | | |
| | 3.3 | Medieval/Post-Medieval Agriculture | . 5 | | | |
| | 3.4 | Other Anomalies | . 6 | | | |
| 4 | DAT | A APPRAISAL & CONFIDENCE ASSESSMENT | 6 | | | |
| 5 | CON | ICLUSION | 6 | | | |
| 6 | REF | ERENCES | 7 | | | |
| ΑI | APPENDIX A – METHODOLOGY & SURVEY EQUIPMENT8 | | | | | |
| ΑI | PPENDI | X B – BASIC PRINCIPLES OF MAGNETIC SURVEY | 9 | | | |
| ΔΙ | PPENDIX C – GLOSSARY OF MAGNETIC ANOMALIES | | | | | |



Job ref: **J8649**Date: **July 2015**

Geophysical Survey Report
Project Name: Lymington, Hampshire
Client: Southampton City Council

Job ref: **J8649**Date: **July 2015**

LIST OF FIGURES

| Figure 01 | 1:25 000 | Location plan of survey area |
|-----------|----------|---|
| Figure 02 | 1:1250 | Location of survey grids and referencing |
| Figure 03 | 1:1250 | Colour plot of gradiometer data showing extreme values |
| Figure 04 | 1:1250 | Plot of minimally processed gradiometer data |
| Figure 05 | 1:1250 | Abstraction and interpretation of gradiometer anomalies |



SUMMARY OF RESULTS

A detailed gradiometry survey was conducted over approximately 4 hectares of grassland. The survey has identified an area of probable former enclosures in the centre of the site. Further possible archaeological anomalies may also relate to the enclosures, or be of a more modern agricultural or natural origin. The detection of post-medieval field boundaries suggests that the area has a recent agricultural past. The remaining anomalies are natural or modern in origin, relating to a farm track, ferrous objects and fencing.

2 INTRODUCTION

2.1 **Background synopsis**

Stratascan were commissioned to undertake a geophysical survey of an area outlined for development. This survey forms part of an archaeological investigation being undertaken by Southampton City Council.

2.2 Site location

The site is located to the north of Alexandra Road, Lymington, Hampshire at OS ref. SZ 313 962.

2.3 Description of site

The survey area is approximately 4 hectares of grassland. The site is generally flat with no obstructions.

2.4 Geology and soils

The underlying geology is Headon Beds and Osborne Beds (undifferentiated) - Clay, Silt and Sand (British Geological Survey website). The drift geology is River Terrace Deposits (undifferentiated) – Sand and Gravel (British Geological Survey website).

The overlying soils are known as Efford 1, which are typical argillic brown earths. These consist of fine loamy soils, often over gravel (Soil Survey of England and Wales, Sheet 6 South East England).

2.5 Site history and archaeological potential

A search of Historic England's (2015) PastScape within 1km of the survey area has identified a number of prehistoric and Roman features and find spots. Two Iron Age Hillforts, Ampress Camp (Monument Number: 459643) and Buckland Rings (Monument Number: 459634), can be seen to the north-east of the site, with possible Neolithic and Bronze Age occupation also seen at Buckland Rings. A number of find spots seen in the surrounding area, including Palaeolithic and Bronze Age axes (Monument Numbers: 549633 and 1096437) and Roman



coins (Monument numbers: 459650 and 459703), though there are no records within the confines of the site.

Medieval activity is also seen in the surrounding area with a possible deserted medieval village (Monument Number: 459693) to the north-west.

2.6 Survey objectives

The objective of the survey was to locate any features of possible archaeological origin in order that they may be assessed prior to development.

2.7 Survey methods

This report and all fieldwork have been conducted in accordance with both the English Heritage guidelines outlined in the document: Geophysical Survey in Archaeological Field Evaluation, 2008 and with the Chartered Institute for Archaeologists document Standard and Guidance for Archaeological Geophysical Survey.

Given the potential for prehistoric and Roman activity, detailed magnetic survey (gradiometry) was used as an efficient and effective method of locating archaeological anomalies. More information regarding this technique is included in Appendix A.

2.8 Processing, presentation and interpretation of results

2.8.1 Processing

Processing is performed using specialist software. This can emphasise various aspects contained within the data but which are often not easily seen in the raw data. Basic processing of the magnetic data involves 'flattening' the background levels with respect to adjacent traverses and adjacent grids. Once the basic processing has flattened the background it is then possible to carry out further processing which may include low pass filtering to reduce 'noise' in the data and hence emphasise the archaeological or man-made anomalies.

The following schedule shows the basic processing carried out on all minimally processed gradiometer data used in this report:

1. Destripe (Removes striping effects caused by zero-point discrepancies

between different sensors and walking directions)

2. Destagger (Removes zigzag effects caused by inconsistent walking speeds

on sloping, uneven or overgrown terrain)

2.8.2 Presentation of results and interpretation

The presentation of the data for each site involves a print-out of the minimally processed data both as a greyscale plot and a colour plot showing extreme magnetic values. Magnetic anomalies have been identified and plotted onto the 'Abstraction and Interpretation of Anomalies' drawing for the site.



3 **RESULTS**

The detailed magnetic gradiometer survey conducted at Lyminton has identified a number of anomalies that have been characterised as being either of a probable or possible archaeological origin.

The difference between probable and possible archaeological origin is a confidence rating. Features identified within the dataset that form recognisable archaeological patterns or seem to be related to a deliberate historical act have been interpreted as being of a probable archaeological origin.

Features of possible archaeological origin tend to be more amorphous anomalies which may have similar magnetic attributes in terms of strength or polarity but are difficult to classify as being archaeological or natural.

The following list of numbered anomalies refers to numerical labels on the interpretation plots.

3.1 Probable Archaeology

1 Positive linear anomalies in the centre of the site. These are indicative of former cut features, and are likely to relate to former enclosures.

3.2 Possible Archaeology

- 2 Positive linear anomalies in the centre of the site. These are indicative of former cut features, and may relate to the enclosures seen in Anomaly 1, or more modern agricultural activity.
- 3 A number of linear and curvilinear positive anomalies in the west of the site. These are indicative of former cut features, and may be of archaeological or agricultural origin.

3.3 Medieval/Post-Medieval Agriculture

- 4-5 Two linear anomalies running across the site. These are likely to relate to postmedieval field boundaries not present on available mapping.
- 6 A weak linear anomaly in the west of the site. This is related to a former field boundary present on available mapping 1868-1942.



Job ref: **J8649** July 2015

3.4 **Other Anomalies**

7 Small, discrete, positive anomalies across the site. These anomalies are likely to be geological or pedological in origin, relating to natural pitting.

- 8 A weak positive linear anomaly in the north-west of the site. This is likely to relate to a modern farm track.
- 9 Areas of magnetic disturbance are the result of substantial nearby ferrous metal objects such as fences and underground services. These effects can mask weaker archaeological anomalies, but on this site have not affected a significant proportion of the area.
- 10 A number of magnetic 'spikes' (strong focussed values with associated antipolar response) indicate ferrous metal objects. These are likely to be modern rubbish.

DATA APPRAISAL & CONFIDENCE ASSESSMENT

Sand and gravel drift geologies, such as those seen at Lymington, can give variable responses to magnetic survey. The detection of probable former enclosures and a number of former field boundaries would suggest that the survey has been effective. However, some of these responses are weak, so there remains a small possibility that weak archaeological anomalies may not be detected.

CONCLUSION

The survey at Lymington has identified a number of probable and possible archaeological anomalies. An area of probable former enclosures is seen in the centre of the site, however it is not possible to determine their date with any degree of confidence. Further possible archaeological anomalies may also relate to the enclosures, or be of a more modern agricultural or natural origin. The detection of post-medieval field boundaries suggests that the area has a recent agricultural past. The remaining anomalies are modern or natural in origin. The modern anomalies relate to a farm track, ferrous objects and fencing.



6 **REFERENCES**

British Geological Survey South Sheet, 1977. Geological Survey Ten Mile Map, South Sheet First Edition (Quaternary). Institute of Geological Sciences.

British Geological Survey, 2001. Geological Survey Ten Mile Map, South Sheet, Fourth Edition (Solid). British Geological Society.

British Geological Survey, n.d., website:

(http://www.bgs.ac.uk/opengeoscience/home.html?Accordion1=1#maps) Geology of Britain viewer.

Chartered Institute For Archaeologists. Standard and Guidance for Archaeological Geophysical Survey. http://www.archaeologists.net/sites/default/files/nodefiles/Geophysics2010.pdf

English Heritage, 2008. Geophysical Survey in Archaeological Field Evaluation.

Historic England, 2015. PastScape. Available from: www.pastscape.org.uk [Accessed 22/07/2015]

Soil Survey of England and Wales, 1983. Soils of England and Wales, Sheet 6 South East England.



APPENDIX A – METHODOLOGY & SURVEY EQUIPMENT

Grid locations

The location of the survey grids has been plotted together with the referencing information. Grids were set out using a Leica 705auto Total Station and referenced to suitable topographic features around the perimeter of the site or a Leica Smart Rover RTK GPS.

An RTK GPS (Real-time Kinematic Global Positioning System) can locate a point on the ground to a far greater accuracy than a standard GPS unit. A standard GPS suffers from errors created by satellite orbit errors, clock errors and atmospheric interference, resulting in an accuracy of 5m-10m. An RTK system uses a single base station receiver and a number of mobile units. The base station re-broadcasts the phase of the carrier it measured, and the mobile units compare their own phase measurements with those they received from the base station. A SmartNet RTK GPS uses Ordnance Survey's network of over 100 fixed base stations to give an accuracy of around 0.01m.

Survey equipment and gradiometer configuration

Although the changes in the magnetic field resulting from differing features in the soil are usually weak, changes as small as 0.2 nanoTeslas (nT) in an overall field strength of 48,000nT, can be accurately detected using an appropriate instrument.

The mapping of the anomaly in a systematic manner will allow an estimate of the type of material present beneath the surface. Strong magnetic anomalies will be generated by buried iron-based objects or by kilns or hearths. More subtle anomalies such as pits and ditches can be seen if they contain more humic material which is normally rich in magnetic iron oxides when compared with the subsoil.

To illustrate this point, the cutting and subsequent silting or backfilling of a ditch may result in a larger volume of weakly magnetic material being accumulated in the trench compared to the undisturbed subsoil. A weak magnetic anomaly should therefore appear in plan along the line of the ditch.

The magnetic survey was carried out using a dual sensor Grad601-2 Magnetic Gradiometer manufactured by Bartington Instruments Ltd. The instrument consists of two fluxgates very accurately aligned to nullify the effects of the Earth's magnetic field. Readings relate to the difference in localised magnetic anomalies compared with the general magnetic background. The Grad601-2 consists of two high stability fluxgate gradiometers suspended on a single frame. Each gradiometer has a 1m separation between the sensing elements so enhancing the response to weak anomalies.

Sampling interval

Readings were taken at 0.25m centres along traverses 1m apart. This equates to 3600 sampling points in a full 30m x 30m grid.

Depth of scan and resolution

The Grad 601-2 has a typical depth of penetration of 0.5m to 1.0m, though strongly magnetic objects may be visible at greater depths. The collection of data at 0.25m centres provides an optimum methodology for the task balancing cost and time with resolution.

Data capture

The readings are logged consecutively into the data logger which in turn is daily down-loaded into a portable computer whilst on site. At the end of each site survey, data is transferred to the office for processing and presentation.



APPENDIX B – BASIC PRINCIPLES OF MAGNETIC SURVEY

Detailed magnetic survey can be used to effectively define areas of past human activity by mapping spatial variation and contrast in the magnetic properties of soil, subsoil and bedrock.

Weakly magnetic iron minerals are always present within the soil and areas of enhancement relate to increases in magnetic susceptibility and permanently magnetised thermoremanent material.

Magnetic susceptibility relates to the induced magnetism of a material when in the presence of a magnetic field. This magnetism can be considered as effectively permanent as it exists within the Earth's magnetic field. Magnetic susceptibility can become enhanced due to burning and complex biological or fermentation processes.

Thermoremanence is a permanent magnetism acquired by iron minerals that, after heating to a specific temperature known as the Curie Point, are effectively demagnetised followed by re-magnetisation by the Earth's magnetic field on cooling. Thermoremanent archaeological features can include hearths and kilns and material such as brick and tile may be magnetised through the same process.

Silting and deliberate infilling of ditches and pits with magnetically enhanced soil creates a relative contrast against the much lower levels of magnetism within the subsoil into which the feature is cut. Systematic mapping of magnetic anomalies will produce linear and discrete areas of enhancement allowing assessment and characterisation of subsurface features. Material such as subsoil and nonmagnetic bedrock used to create former earthworks and walls may be mapped as areas of lower enhancement compared to surrounding soils.


Magnetic survey is carried out using a fluxgate gradiometer which is a passive instrument consisting of two sensors mounted vertically 1m apart. The instrument is carried about 30cm above the ground surface and the top sensor measures the Earth's magnetic field whilst the lower sensor measures the same field but is also more affected by any localised buried field. The difference between the two sensors will relate to the strength of a magnetic field created by a buried feature, if no field is present the difference will be close to zero as the magnetic field measured by both sensors will be the same.

Factors affecting the magnetic survey may include soil type, local geology, previous human activity, disturbance from modern services etc.



APPENDIX C – GLOSSARY OF MAGNETIC ANOMALIES

Bipolar




A bipolar anomaly is one that is composed of both a positive response and a negative response. It can be made up of any number of positive responses and negative responses. For example a pipeline consisting of alternating positive and negative anomalies is said to be bipolar. See also dipolar which has only one area of each polarity. The interpretation of the anomaly will depend on the magnitude of the magnetic field strength. A weak response may be caused by a clay field drain while a strong response will probably be caused by a metallic service.

Job ref: **J8649**

July 2015

Date:

Dipolar




This consists of a single positive anomaly with an associated negative response. There should be no separation between the two polarities of response. These responses will be created by a single feature. The interpretation of the anomaly will depend on the magnitude of the magnetic measurements. A very strong anomaly is likely to be caused by a ferrous object.

Positive anomaly with associated negative response

See bipolar and dipolar.

Positive linear




A linear response which is entirely positive in polarity. These are usually related to in-filled cut features where the fill material is magnetically enhanced compared to the surrounding matrix. They can be caused by ditches of an archaeological origin, but also former field boundaries, ploughing activity and some may even have a natural origin.



Project Name: Lymington, Hampshire **Southampton City Council**

Positive linear anomaly with associated negative response




A positive linear anomaly which has a negative anomaly located adjacently. This will be caused by a single feature. In the example shown this is likely to be a single length of wire/cable probably relating to a modern service. Magnetically weaker responses may relate to earthwork style features and field boundaries.

Job ref: **J8649**


July 2015

Positive point/area




These are generally spatially small responses, perhaps covering just 3 or 4 reading nodes. They are entirely positive in polarity. Similar to positive linear anomalies they are generally caused by in-filled cut features. These include pits of an archaeological origin, possible tree bowls or other naturally occurring depressions in the ground.

Magnetic debris



Magnetic debris consists of numerous dipolar responses spread over an area. If the amplitude of response is low (+/-3nT) then the origin is likely to represent general ground disturbance with no clear cause, it may be related to something as simple as an area of dug or mixed earth. A stronger anomaly (+/-250nT) is more indicative of a spread of ferrous debris. Moderately strong anomalies may be the result of a spread of thermoremanent material such as bricks or ash.


Magnetic disturbance



Magnetic disturbance is high amplitude and can be composed of either a bipolar anomaly, or a single polarity response. It is essentially associated with magnetic interference from modern ferrous structures such as fencing, vehicles or buildings, and as a result is commonly found around the perimeter of a site near to boundary fences.



Negative linear




A linear response which is entirely negative in polarity. These are generally caused by earthen banks where material with a lower magnetic magnitude relative to the background top soil is built up. See also ploughing activity.

Negative point/area

Opposite to positive point anomalies these responses may be caused by raised areas or earthen banks. These could be of an archaeological origin or may have a natural origin.

Ploughing activity



Ploughing activity can often be visualised by a series of parallel linear anomalies. These can be of either positive polarity or negative polarity depending on site specifics. It can be difficult to distinguish between ancient ploughing and more modern ploughing. Clues such as the separation of each linear, straightness, strength of response and cross cutting relationships can be used to aid this, although none of these can be guaranteed to differentiate between different phases of activity.

Polarity

Term used to describe the measurement of the magnetic response. An anomaly can have a positive polarity (values above OnT) and/or a negative polarity (values below OnT).

Strength of response


The amplitude of a magnetic response is an important factor in assigning an interpretation to a particular anomaly. For example a positive anomaly covering a 10m² area may have values up to around 3000nT, in which case it is likely to be caused by modern magnetic interference. However, the same size and shaped anomaly but with values up to only 4nT may have a natural origin. Colour plots are used to show the amplitude of response.



Thermoremanent response

A feature which has been subject to heat may result in it acquiring a magnetic field. This can be anything up to approximately +/-100 nT in value. These features include clay fired drains, brick, bonfires, kilns, hearths and even pottery. If the heat application has occurred in situ (e.g. a kiln) then the response is likely to be bipolar compared to if the heated objects have been disturbed and moved relative to each other, in which case they are more likely to take an irregular form and may display a debris style response (e.g. ash).

Weak background variations




Weakly magnetic wide scale variations within the data can sometimes be seen within sites. These usually have no specific structure but can often appear curvy and sinuous in form. They are likely to be the result of natural features, such as soil creep, dried up (or seasonal) streams. They can also be caused by changes in the underlying geology or soil type which may contain unpredictable distributions of magnetic minerals, and are usually apparent in several locations across a site.



Reproduced from Ordnance Survey's 1:25 000 map of 1998 with the permission of the controller of Her Majesty's Stationery Office. Crown Copyright reserved. Licence No: AL 50125A Licencee: Stratascan Ltd. Vineyard House Upper Hook Road Upton Upon Severn WR8 0SA

OS 100km square = TM

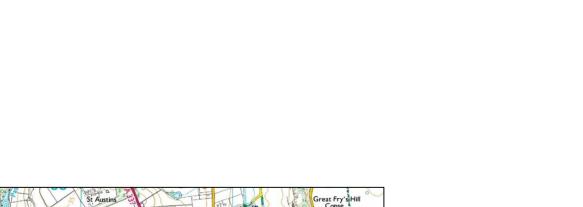

98 97 LYMINGTON 96 Survey Area 95 94

31

32

33

29

30



Amendments

SZ 313 962

Client

SOUTHAMPTON CITY COUNCIL

Project Title

Job No. J8649 GEOPHYSICAL SURVEY -LYMINGTON, HAMPSHIRE

Subject

LOCATION PLAN OF SURVEY AREA



AND ENGINEERING VINEYARD HOUSE

T: 01684 592266 UPTON UPON SEVERN E: info@stratascan.co.uk www.stratascan.co.uk







GROUP MEMBER ISO 9001 certified




| U KAS QUANTY MANAGAMENT 078 | ISO 14001 certified | U K A S ENSIRONMENTAL MANAGEMENT 078 | |
|--------------------------------------|------------------------|---|--|
| 00 | 1000 | m | |

| 901 Sings | | |
|---------------|------------|------------|
| Scale 1:25000 | 0m 500 | 1000m |
| Plot | Checked by | Issue No. |
| A3 | DGĚ | 01 |
| Survey date | Drawn by | Figure No. |
| JUL 15 | TR | 01 |

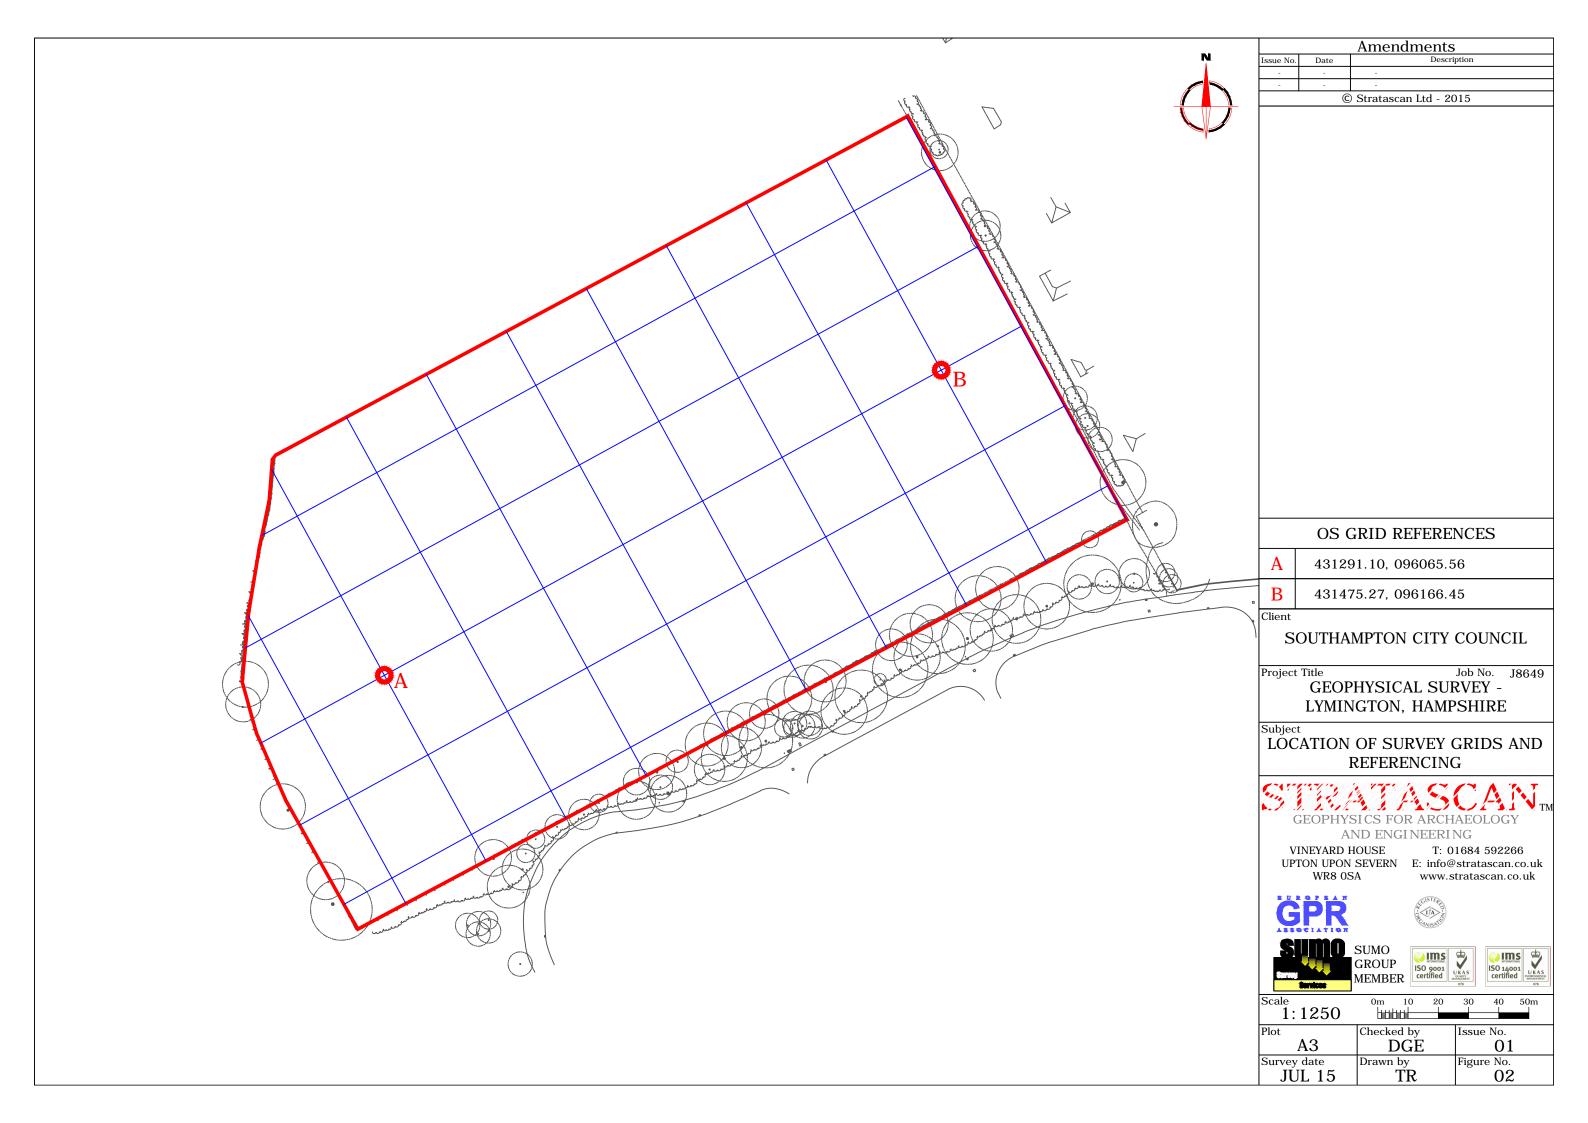

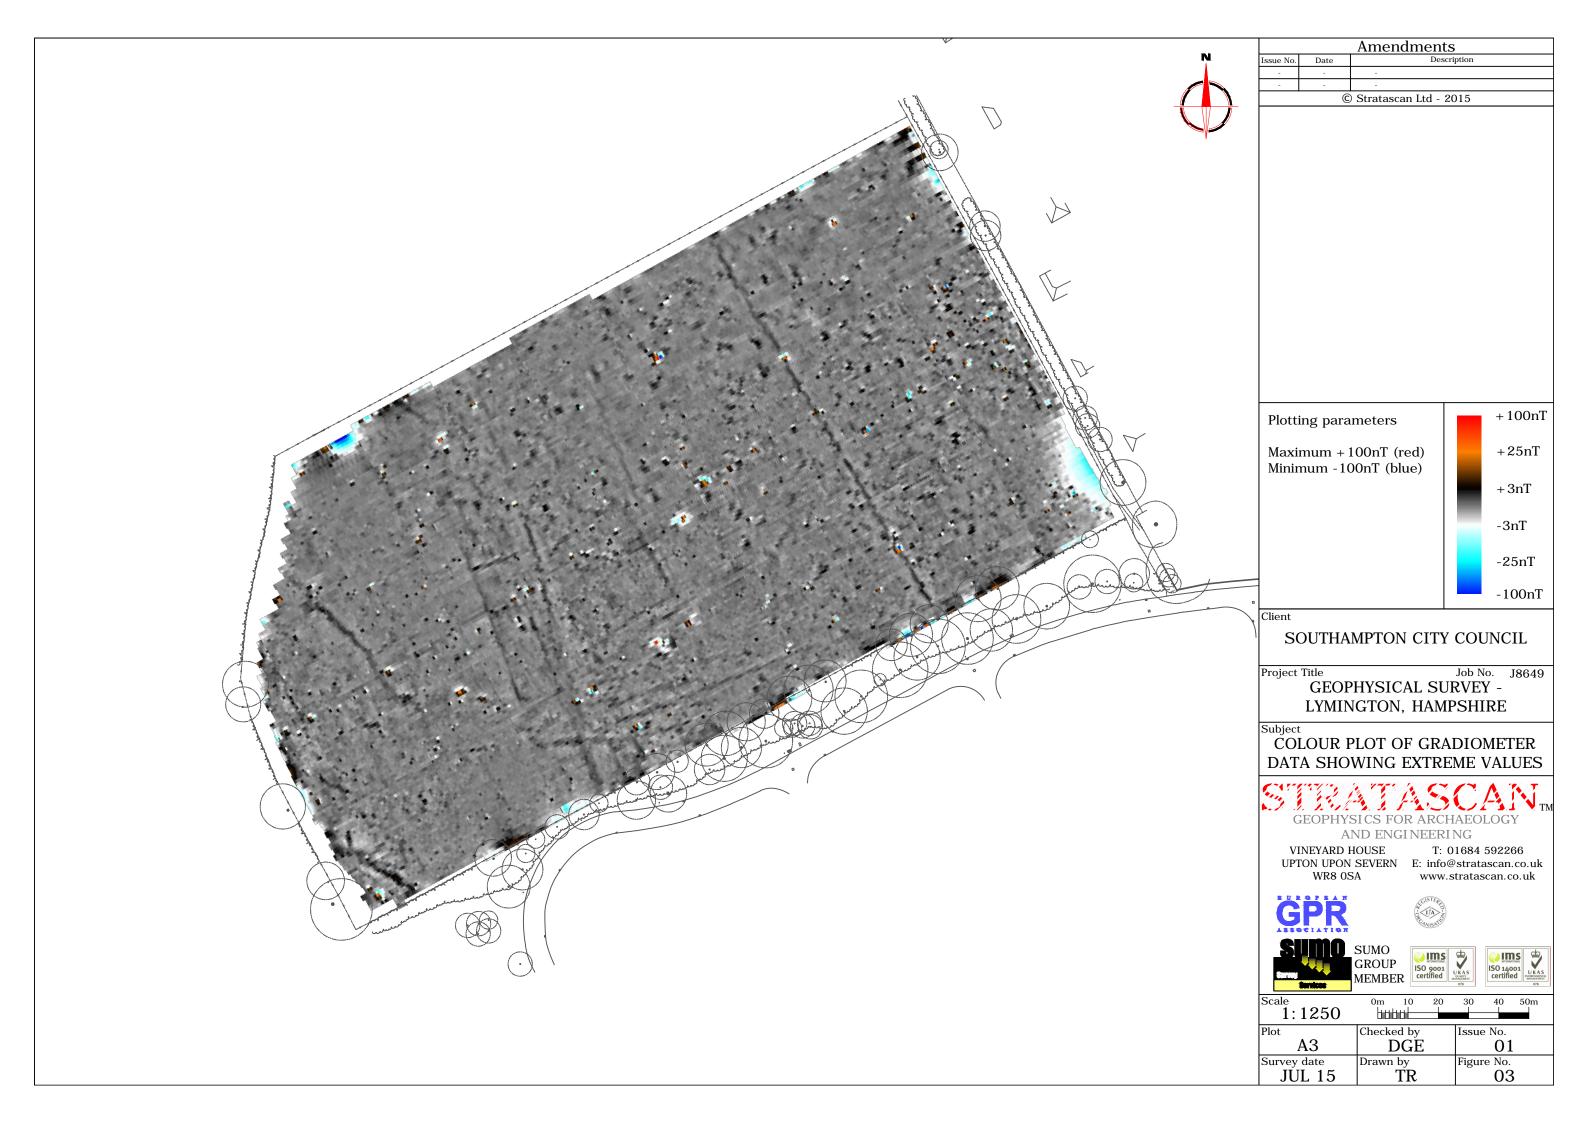



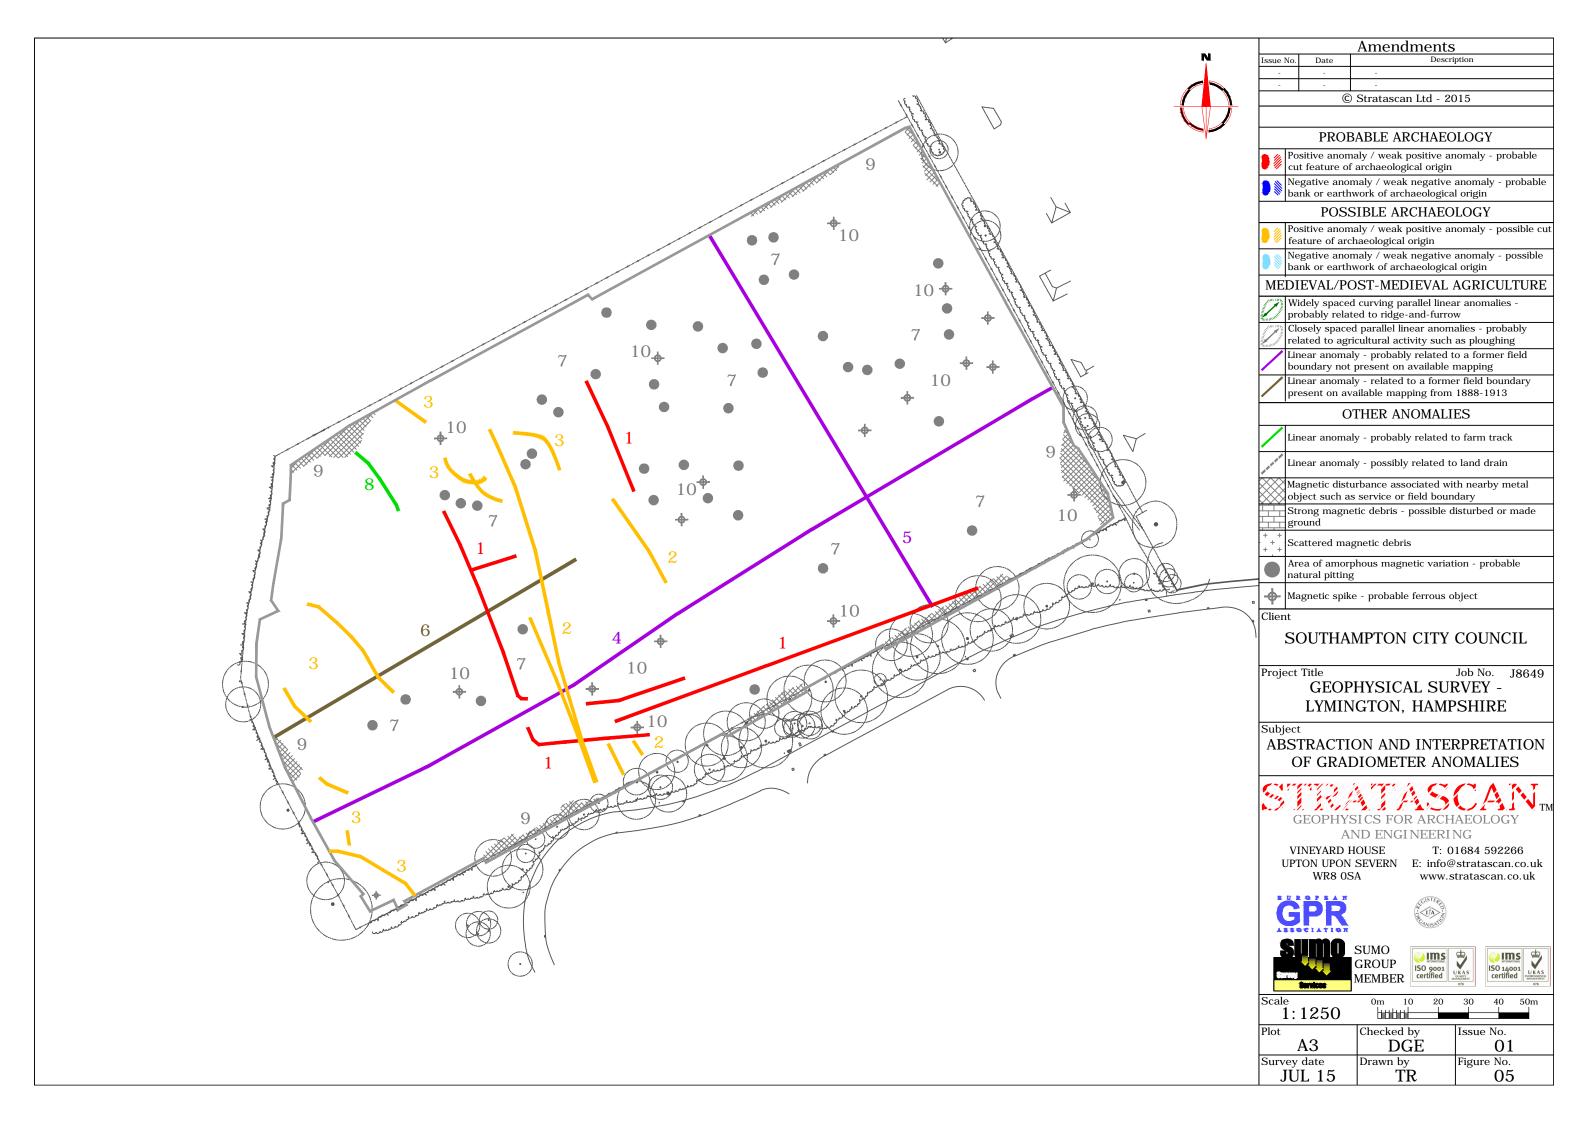

Your Survey Partner

For a complete and complementary range of survey services

Survey services you can rely on

Archaeological **As Built Records BIM Ready 3D Models Boundary Disputes CCTV** Geophysical **Laser Scanning Measured Building Pipeline Routes** Railway Retrofit **Setting Out Statutory Plan Collation Topographic Utility Mapping UXO Detection Void Detection**

STRATASCAN LTD

Vineyard House Upper Hook Road Upton upon Severn Worcestershire WR8 0SA United Kingdom

T:01684 592266 F: 01684 594142 info@stratascan.co.uk www.stratascan.co.uk













