

Historic building recording of Pimlico School, Lupus Street, SW1, City of Westminster

Central National Grid Reference: TQ 2945 7819

Written and researched by: Helen Robertson, Rhiannon Rhys and Guy Thomson

Project manager: Alex Rose-Deacon

Commissioning client: Bouygues UK Ltd

Contractor: Pre-Construct Archaeology Ltd

PCA

Unit 54

Brockley Cross Business Centre

96 Endwell Road

Brockley

London

SE4 2PD

Tel: 0207 732 3925

Fax: 0207 639 9588

©PCA

July 2008

CONTENTS

1	NON-TECHNICAL SUMMARY	5
2	INTRODUCTION AND PLANNING BACKGROUND.....	8
3	METHOD.....	9
4	HISTORICAL BACKGROUND.....	11
5	BUILDING DESCRIPTION.....	19
6	HISTORIC SEQUENCE.....	38
7	CONCLUSIONS.....	40
8	ACKNOWLEDGEMENTS	43
9	BIBLIOGRAPHY.....	44
	APPENDIX 1.....	45
	APPENDIX 2.....	48

Plate list

Plate 1 View of Pimlico School from corner of Claverton Street and Lupus Street, looking south-east

Plate 2 View of visitor's entrance to school, looking south

Plate 3 View of detail of buttress on west end of school, looking west

Plate 4 View of school from Dolphin Square, looking north-east

Plate 5 View of a typical woodwork room, showing evidence of scarring on floor, looking east

Plate 6 View of Library up to corridor above, looking west

Plate 7 View of school from Dolphin House, looking north

Plate 8 View of shutter marks on concrete, looking north-northwest

Plate 9 View of original fire alarm located on lower ground floor, kitchen, looking east-northeast

Figure list

- Fig 1 General location plan (scale 1:20,000)
- Fig 2 Detailed location plan (scale 1:1,000)
- Fig 3 Horwood, 1793 (scale 1:2,500)
- Fig 4 Greenwood, 1827 (scale 1:10,000)
- Fig 5 Bacon, 1888 (scale 1:10,000)
- Fig 6 Bacon, 1912 (scale 1:10,000)
- Fig 7 Ordnance Survey, 1950 (scale 1:2,500)
- Fig 8 Ordnance Survey, 1973 (scale 1:2,500)
- Fig 9 Original Architects' plan, lower ground floor (not to scale)
- Fig 10 Plan showing alterations, lower ground floor (scale 1:400)
- Fig 11 Carillion Services Ltd detail drawing of internal and external doors (scale 1:20)
- Fig 12 Original Architects' plan, ground floor (not to scale)
- Fig 13 Plan showing alterations, ground floor (scale 1:400)
- Fig 14 Original Architects' detail drawing of store cupboard (not to scale)
- Fig 15 Original Architects' plan, first floor (not to scale)
- Fig 16 Plan showing alterations, first floor (scale 1:400)
- Fig 17 Original Architects' plan, second floor (not to scale)
- Fig 18 Plan showing alterations, second floor (scale 1:400)
- Fig 19 Original Architects' plan, roof area (not to scale)

1 NON-TECHNICAL SUMMARY

This report presents the results of historic building recording, following the recommendations of the Written Scheme of Investigation (Rose-Deacon, 2007), carried out by PCA Ltd. at Pimlico School, London SW1. Bouygues UK Ltd commissioned the historic building survey as part of the discharge of planning consent conditions for demolition and redevelopment of the site. The National Grid Reference for the centre of the site is TQ 2945 7819.

The site's location is illustrated in Figures 1 and 2. The building was designed in 1964 by lead architect Hubert Bennett and group leader and job architect John Bancroft of the Architects' Department of the Greater London Council, and opened in 1970. Its radial design meant that it was received with high praise, and was given several awards for architectural quality.

The building is constructed of a concrete frame, with exterior walls and roof of glass. This design was intended to create a 'greenhouse' effect which would heat the school during the summer months. The panes of glass are protected by adjustable sunshades, to prevent overheating.

The school is located in a sunken yard, some three metres below street level. The yard, which is also of concrete, serves as a play and sport area. Access is attained via raised concrete walkways from St George's Square, Lupus Street and Claverton Street. These lead to doors at ground floor level, from where all rooms within the school can be accessed.

Fieldwork was undertaken in two phases: Phase 1 focused on the swimming pool and music room areas, Phase 2 followed after this work and resulted in a record of the rest of the building. The results of the two phases are combined here to form the final report.

The fabric is mostly original, suffering from areas of extensive damp and water damage to the reinforced concrete frame of the structure. The internal spaces, particularly the ground floor have had minor alterations to adapt to the working life of the school throughout its 38 year history. A significant proportion of the original fixtures and fittings have also been removed.


An archaeological evaluation was also undertaken by P.C.A. on the site (Lythe 2008).



© Crown copyright 1992. All rights reserved. License number 36110309

© Pre-Construct Archaeology Ltd. 2008

Pimlico School
 Figure 1
 General location plan
 1:20,000 at A4

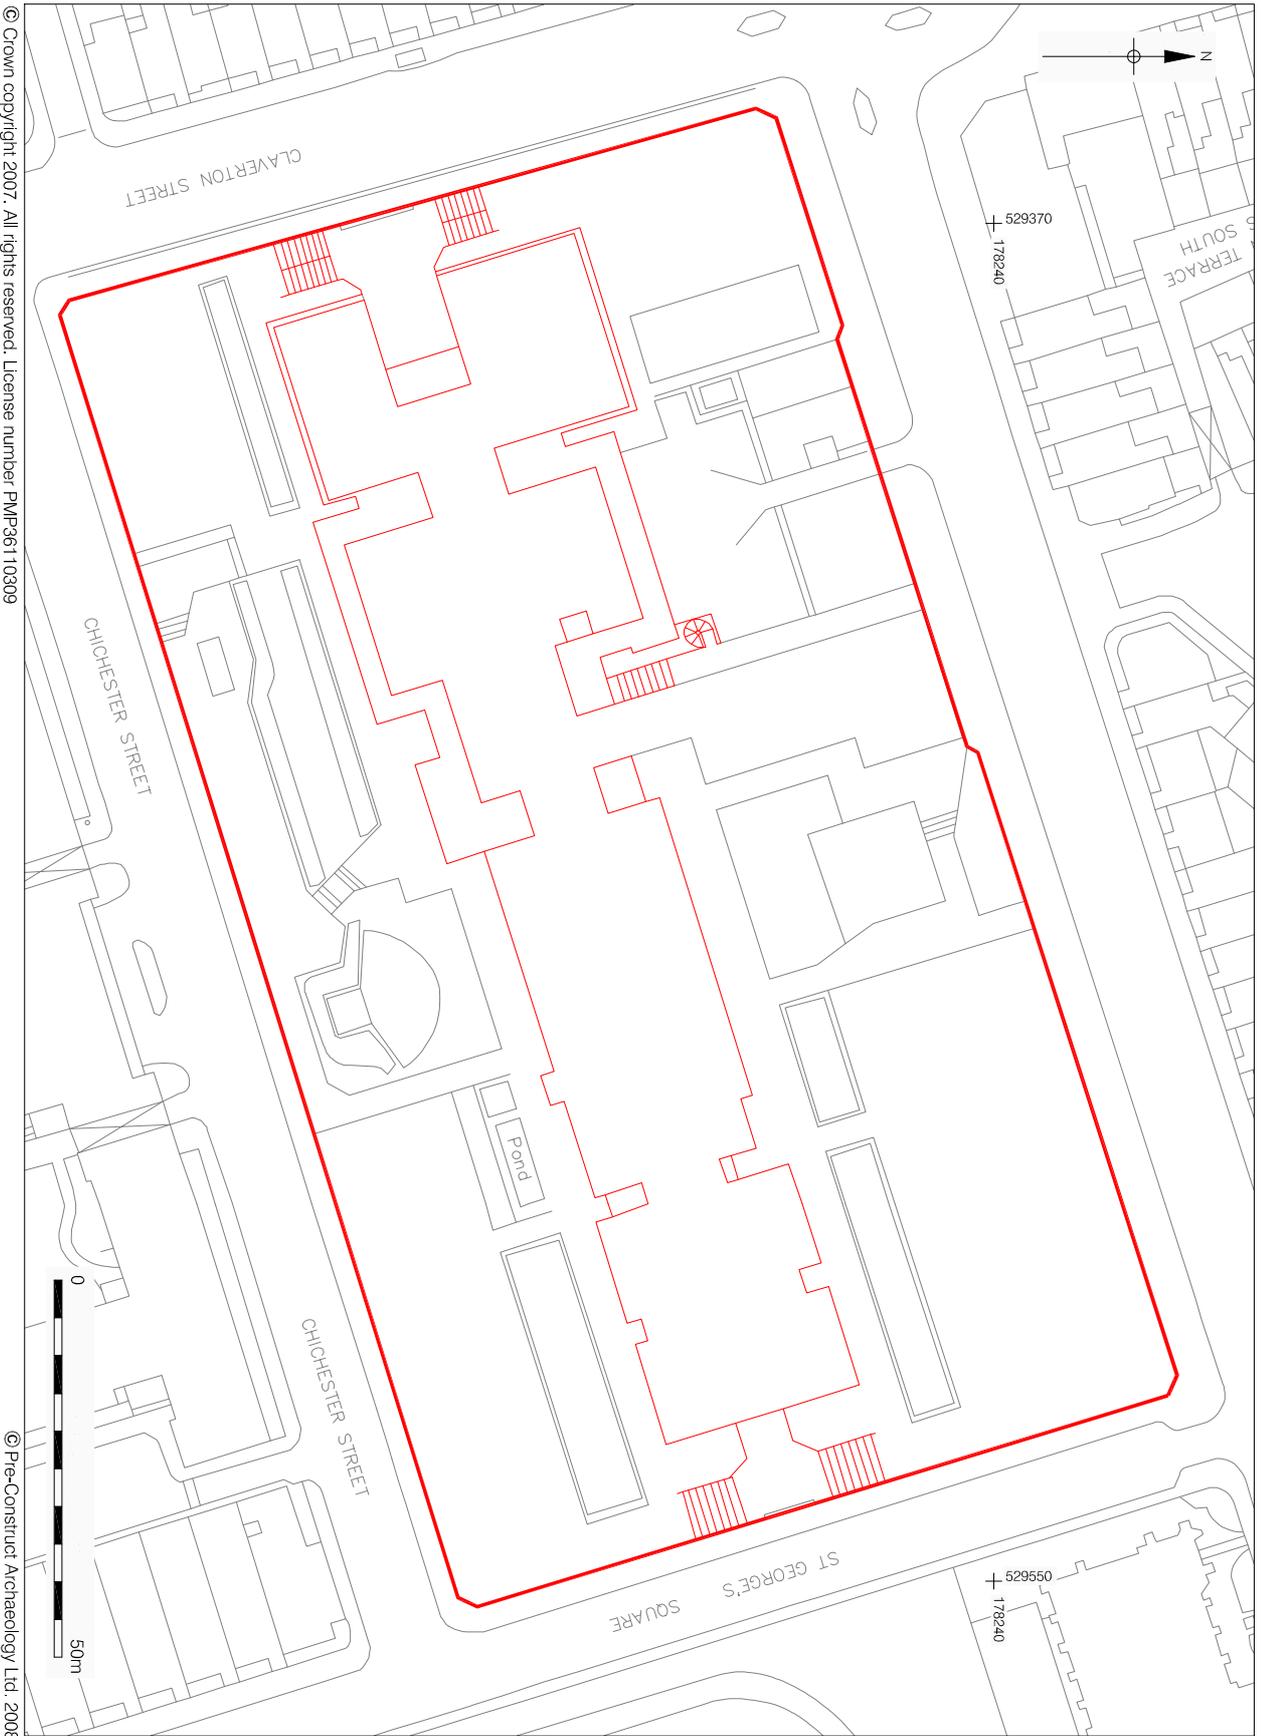

© Crown copyright 2007. All rights reserved. License number PMP361 10309

© Pre-Construct Archaeology Ltd. 2008

Pimlico School
 Figure 2
 Detailed location plan
 1:1,000 at A4

2 INTRODUCTION AND PLANNING BACKGROUND

- 2.1 Bouygues UK Ltd commissioned historic building recording for Pimlico School, Lupus Street, City of Westminster. The site's location is illustrated in Figure 1. The building is not listed, but is of considerable historical and architectural interest due to its unique design and radical use of materials.
- 2.2 As part of the planned development of the school area, the complete demolition of the school will be undertaken.
- 2.3 A recommendation for a programme of Level 2 building recording (as defined by English Heritage) of the school prior to demolition was made by Diane Walls of the Greater London Archaeology Advisory Service (GLAAS), archaeological advisors to the City of Westminster.
- 2.4 As a step towards satisfying recommendation, historic building recording and analysis (including assessment) was carried out in advance of demolition.
- 2.5 The historic building recording was aimed at producing a descriptive record of the buildings, focusing upon areas which retained original features.
- 2.6 The development and history of the buildings was researched from a range of historical source material, including historical and Ordnance Survey maps.
- 2.7 The school is located in a sunken yard, some three metres below street level. The yard, which is also of concrete, serves as a play and sport area. Access is attained via raised concrete walkways from St George's Square, Lupus Street and Claverton Street. These lead to doors at first floor level, from where all rooms within the school can be accessed.
- 2.8 The building is constructed of a concrete frame, with exterior walls and roof of glass. This design was intended to create a 'greenhouse' effect which would heat the school during the summer months. The panes of glass are protected by adjustable sunshades, to prevent overheating.
- 2.9 The school has remained mostly intact, with only minor alterations, additions and changes occurring internally. A significant proportion of the original fixtures and fittings have been removed.

3 METHOD

3.1 General

3.1.1 The historic building recording of Pimlico School was aimed at preserving the buildings by record prior to their demolition as part of the proposed development. The survey was undertaken at English Heritage Level 2, as outlined in *Understanding Historic Buildings: A Guide to Good Recording Practice* (English Heritage 2006), and comprised written description of internal spaces, external elevations; and photography. A Level 2 survey comprises some hand-drawn records and a greater emphasis on photographic recording.

3.2 Assessment

3.2.1 Fieldwork on the site was carried out in two phases between 11th February 2008 and 12th February 2008 for phase 1 and between 7th April 2008 and 9th April 2008 for phase 2, according to a written scheme of investigation produced for the site (Rose-Deacon, 2007).

3.3 Recording

3.3.1 Copies of electronically measured floor plans of all floors of the school, produced by the Architects' Department of the Greater London Council, were provided by Bouygues UK Ltd to the recording team for use as base drawings. These were the original blueprints for the school.

3.3.2 The fieldwork involved annotating and updating the original architect's plans to record the design features of the building, and show the ways in which it has changed since construction.

3.4 Photography

3.4.1 A photographic survey of the school was undertaken. The school was recorded externally and internally in 35mm and medium format black and white film, and colour slide film. External elevations, internal spaces and important architectural details were photographed. A selection of photographs is presented within this report. Archive quality prints will be provided with the archive.

3.5 Written recording

3.5.1 Written fabric and form descriptions were undertaken of external elevations and internal spaces. Descriptions are reproduced within Section 5 of this report.

3.6 Research

3.6.1 Archival research was carried out by Pre-Construct Archaeology's historian, Guy Thomson, at the London Metropolitan Archives Centre, Royal Institute of British Architects (RIBA) Library and the City of Westminster Planning and City Development Department. Historic maps, photographs and documents were consulted, as well as the original blueprints of the school. The results of this research are presented in the following report.

3.7 Site Archive

3.7.1 Copies of the report, drawings and photographs produced by the Historic Building Recording will be lodged with the English Heritage National Monuments Record at Swindon, GLAAS and with the City of Westminster. The archive will be held at the LAARC.

3.8 Guidance

3.8.1 All works were undertaken in accordance with standards set out in:
Association of Local Government Archaeological Officers: *Analysis and Recording for the Conservation and Control of Works to Historic Buildings* (1997)
British Archaeologists and Developers Liaison Group: *Code of Practice* (1986)

British Standards Institution: Guide to the Principles of the Conservation of Historic Buildings (BS 7913) (1998)

English Heritage: Guidance Paper 98: GLAAS: Guidance Paper 3-Standards and Practices in Archaeological Fieldwork in London

English Heritage (Clark K): *Informed Conservation* (2001)

English Heritage: The Presentation of Historic Building Survey in CAD (2000)

IFA: Standards and Guidance for the Archaeological Investigation and Recording of Standing Buildings or Structures (1999)

English Heritage Understanding Historic Buildings; a guide to good recording practice (2006)


4 HISTORICAL BACKGROUND

- 4.1 The first reference to Pimlico comes from 1626 and stems from a reference to a group of cottages known as the 'Neat Houses', around Ranelagh Gardens. This land lay immediately to the south of the study area and the cottages were part of the manor belonging to the Abbot of Westminster. During the 17th and 18th centuries, these gardens provided produce to be consumed in London (Fig 3).
- 4.2 By 1827 (Fig 4), the area the site is located upon was still being used as market gardens. The northern boundary of the site is now secure, modern day Lupus Street is denoted on this map as Crofs (or Cross) Lane. An unmarked road runs on the boundary of the site to west, what is now known as Claverton Street. A lane likely to be the present day Grosvenor Road runs further to the east of the site. Further to the south is the River Thames.
- 4.3 By the turn of the 19th century, many of the narrow streets in and around Parliament Square had been either redeveloped or eradicated. Pimlico, however, remained relatively undeveloped consisting of osier beds, market gardens and wasteland. This all changed around 1830 when Thomas Cubitt, a speculative builder, acquired the leases from the Grosvenor Estate. Cubitt began the construction in a similar manner as his earlier work in Belgravia, directed towards a middle class clientele. Several of the streets bear testimony to Grosvenor names and estates, including Lupus Street and Chester Street, named after Hugh Lupus, Earl of Chester.
- 4.4 Development in the area increased during the mid-late 19th century and by 1888 (Fig 5) the site was occupied by a series of urban developments and domiciles. The site had by that time been divided into four residential blocks running northwest-southeast. The street names were given by Bacon (Fig 5) as Colchester Street, Cornwall Street and Worcester Street. This map, however, is not devoid of errors and it is possible that the inaccuracies of map making at the time allowed Bacon to alter the length of these streets, meaning that the southern boundary of the site, Chichester Street, is further south than appears on any other map.
- 4.5 The 1912 map (Fig 6) by Bacon shows little change in the area of the site or the surrounding areas. The same four residential blocks remain in situ with approximately 30 numbered houses in each row. It is likely that each also had a small garden attached to the property.
- 4.6 Pimlico was heavily hit during the bombing raids of World War II. The proximity of transportation links such as Victoria Station and the bridges over the River Thames, and industry such as Battersea Power Station meant that the area was often peppered with bombs targeting these sites.
- 4.7 After the war there was a considerable demand for new schools. Westminster City School wanted to update their present building and occupy the bombed-out space that eventually became Churchhill Gardens. Space in the area was at a premium and the bombing gave rise to the opportunity to clear vast areas of damaged buildings for large projects. In the case of Pimlico School, the buildings located on the site previously were already in a state of severe dilapidation and hence considered prime candidates to be removed.
- 4.8 The site itself, however, is thought to be well below the size of a school the required proportions, being only 4 ½ acres (1.8 hectares) (Bancroft 1971; 826).
- 4.9 In 1950 (Fig 7) the site layout remained very similar to that recorded on the 1912 map (Fig 6).
- 4.10 The school was designed by Sir Hubert Bennett in 1967, and may be best described by its local nickname, 'The Glass School' due to the prominence of the glass in the roof protruding from the sunken yard.

- 4.11 Pimlico School was initially designed for the use of 1725 children between the ages of 11 and 18. These children came from the areas of Westminster and Chelsea on public transport and by foot. John Bancroft, the group leader and job architect of the project, notes that the

“...surrounding area is intensely developed mainly with tall early 19th century stuccoed houses and the seven-storey blocks of flats of Dolphin Square.”
(Bancroft 1971; 826).

- 4.12 The Ordnance Survey map of 1973 (Fig 8) shows the school and its boundary wall just after the completion of its construction in 1970.

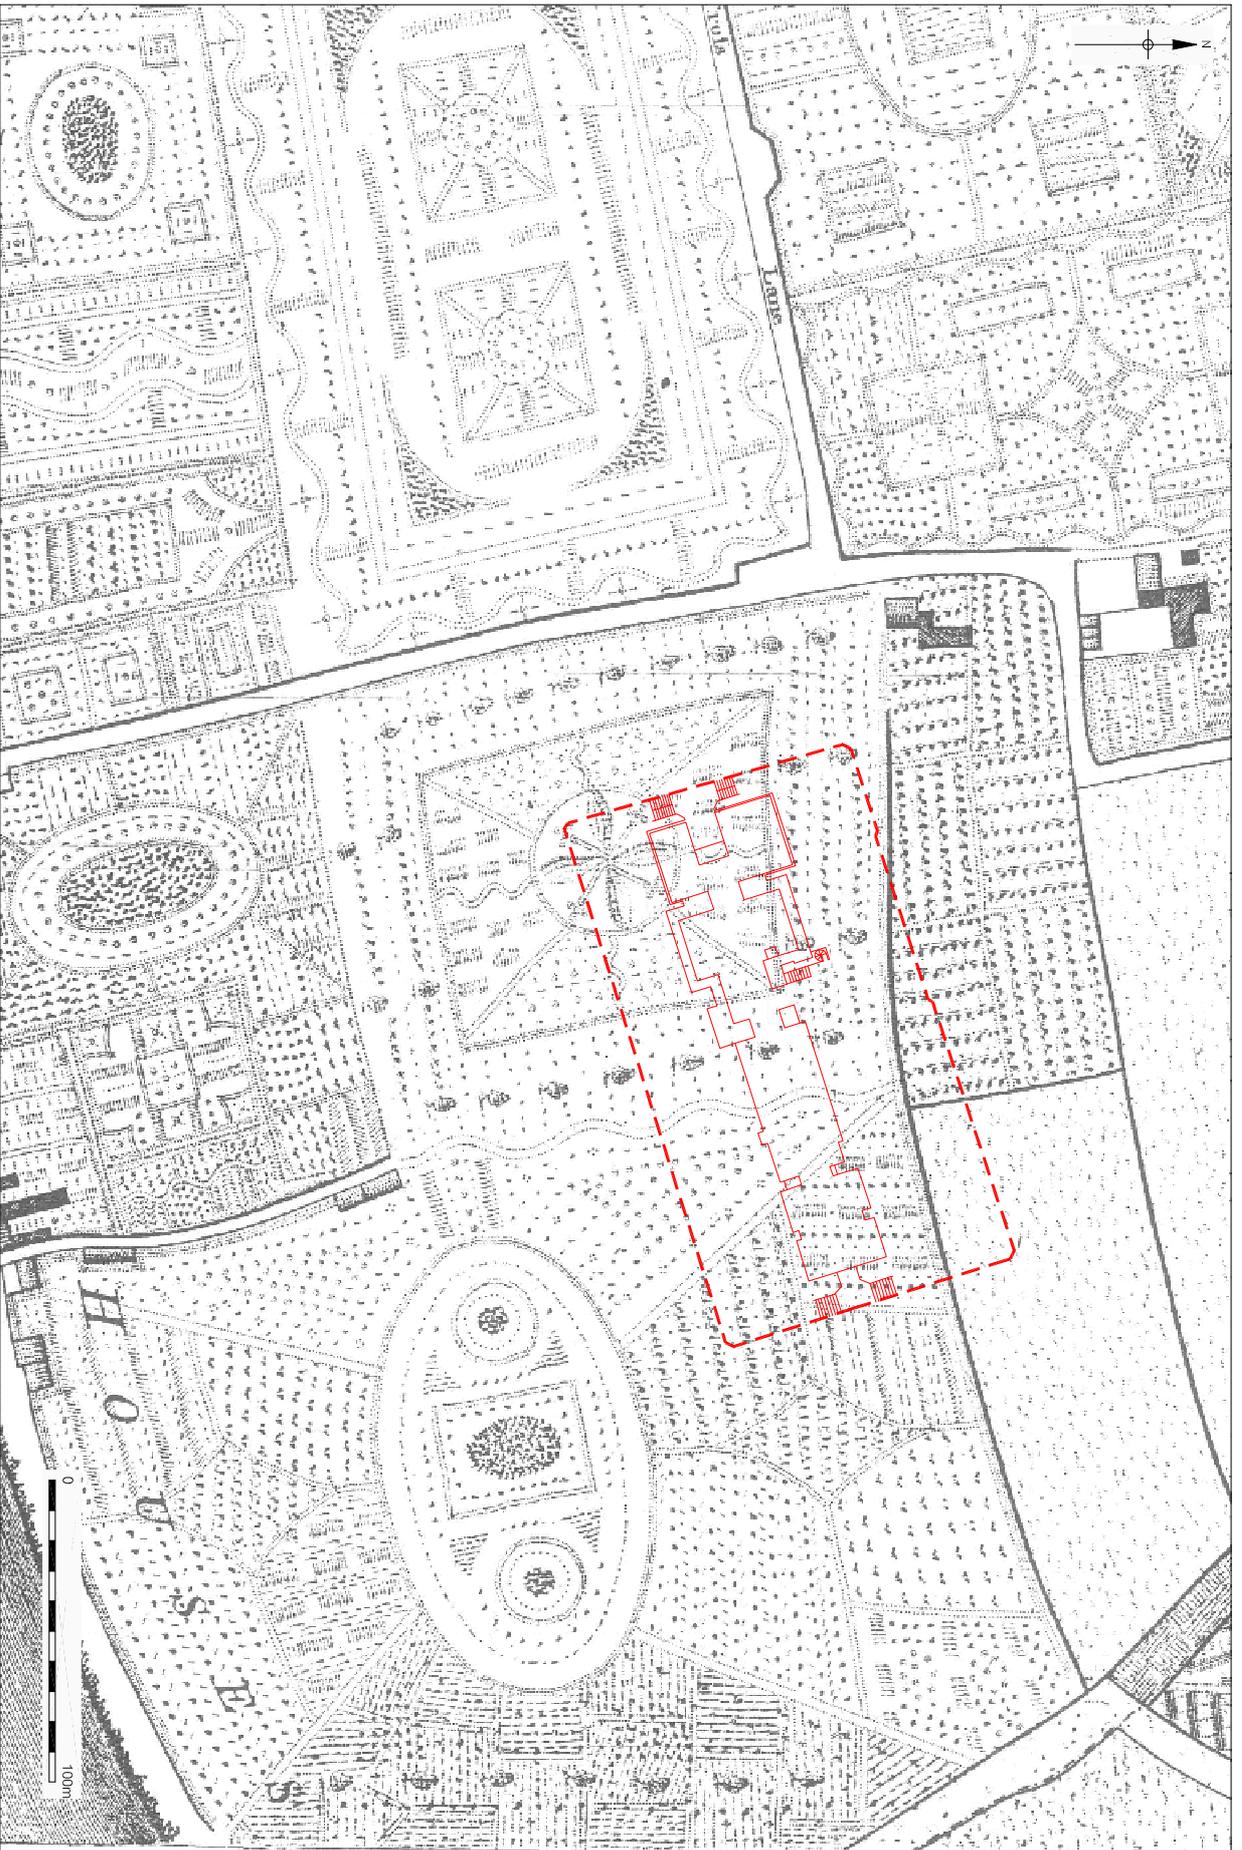


© Pre-Construct Archaeology Ltd. 2008

Pimlico School
Figure 3
Horwood, 1793
1:2,500 at A4




© Pre-Construct Archaeology Ltd. 2008

Pimlico School
Figure 4
Greenwood, 1827
1:10,000 at A4

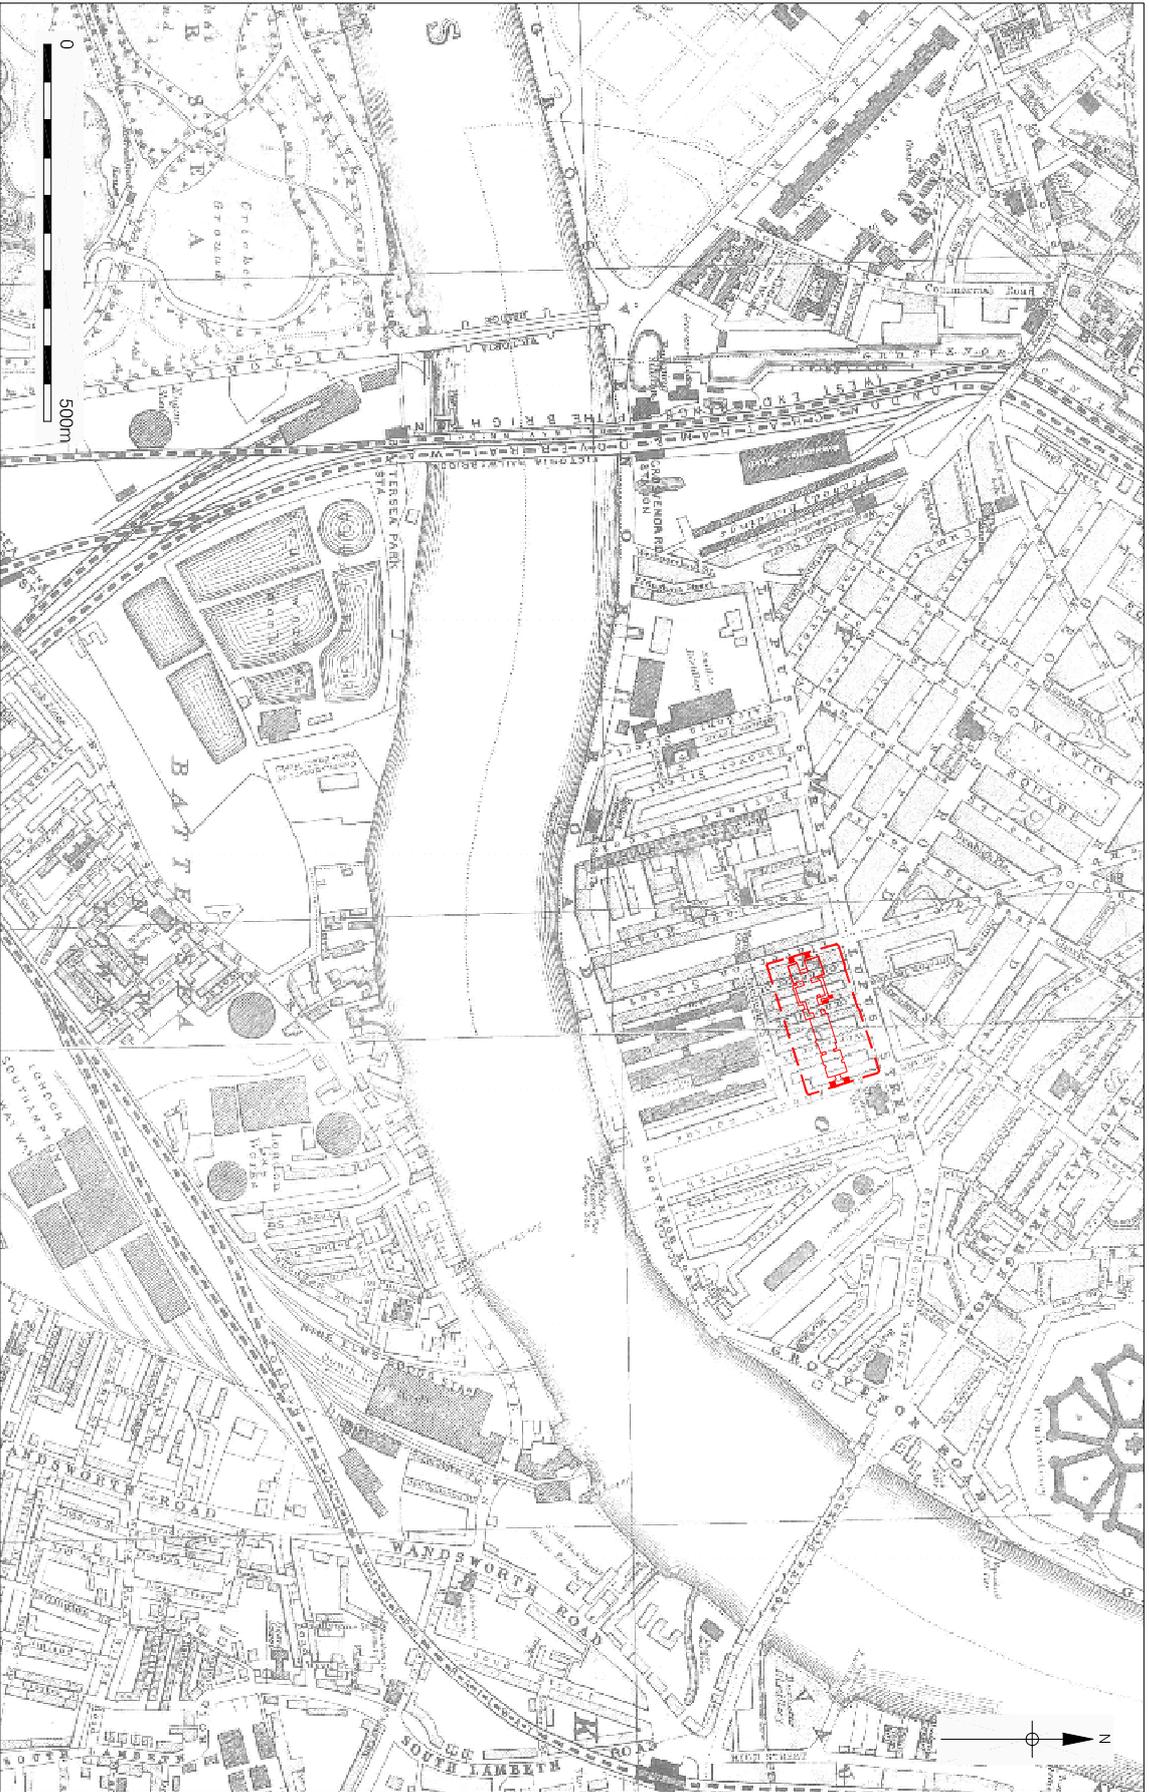


© Pre-Construct Archaeology Ltd, 2008

Pimlico School
Figure 5
Bacon, 1888
1:10,000 at A4

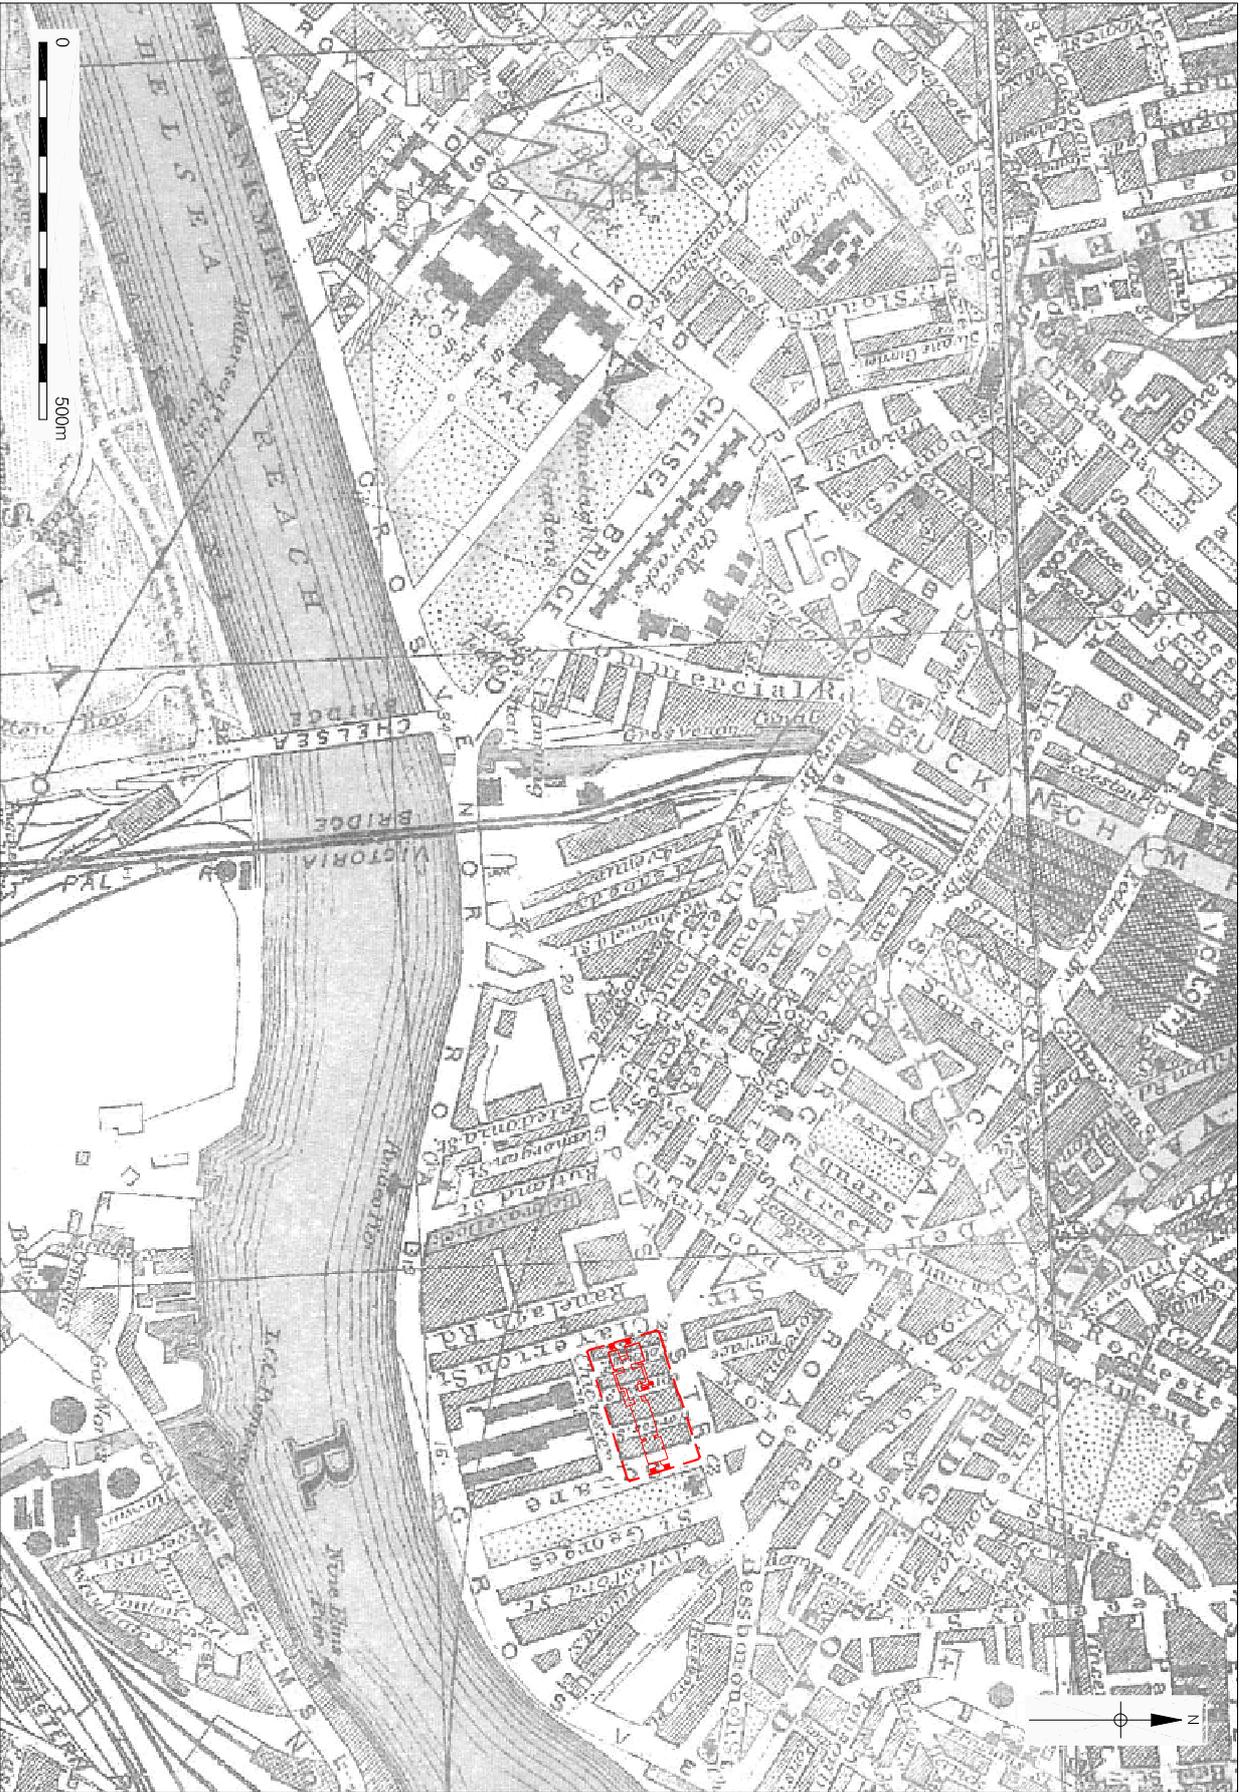


© Pre-Construct Archaeology Ltd, 2008

Pimlico School
Figure 6
Bacon, 1912
1:10,000 at A4

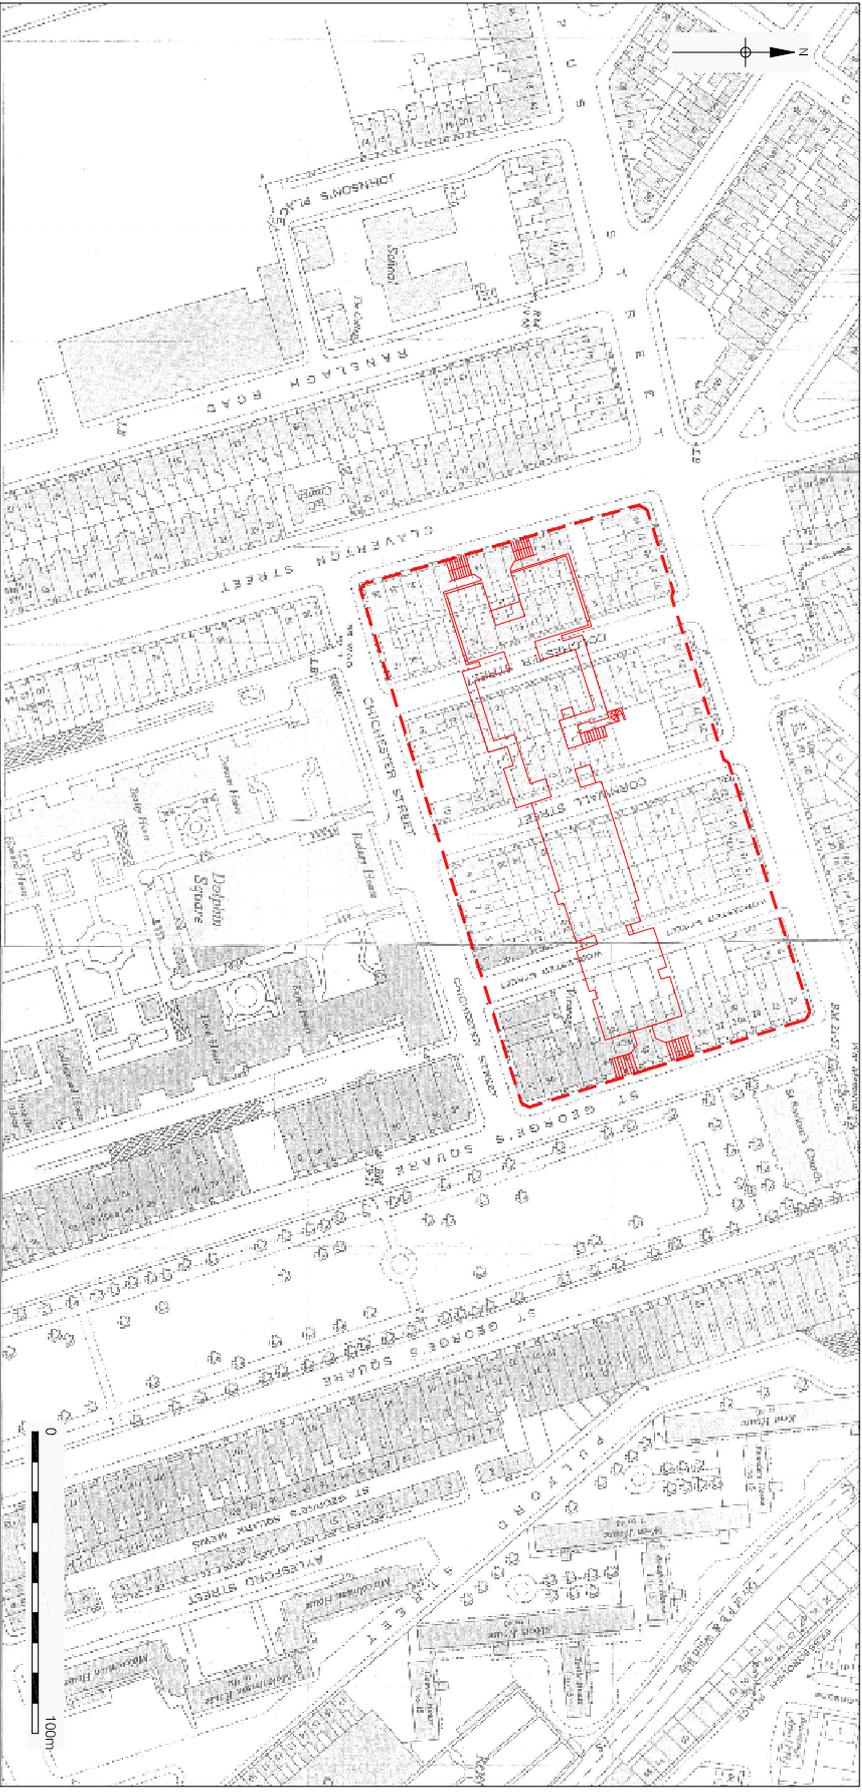

© Pre-Construct Archaeology Ltd. 2008

Pimlico School
Figure 7
Ordnance Survey, 1950
1:2,500 at A4

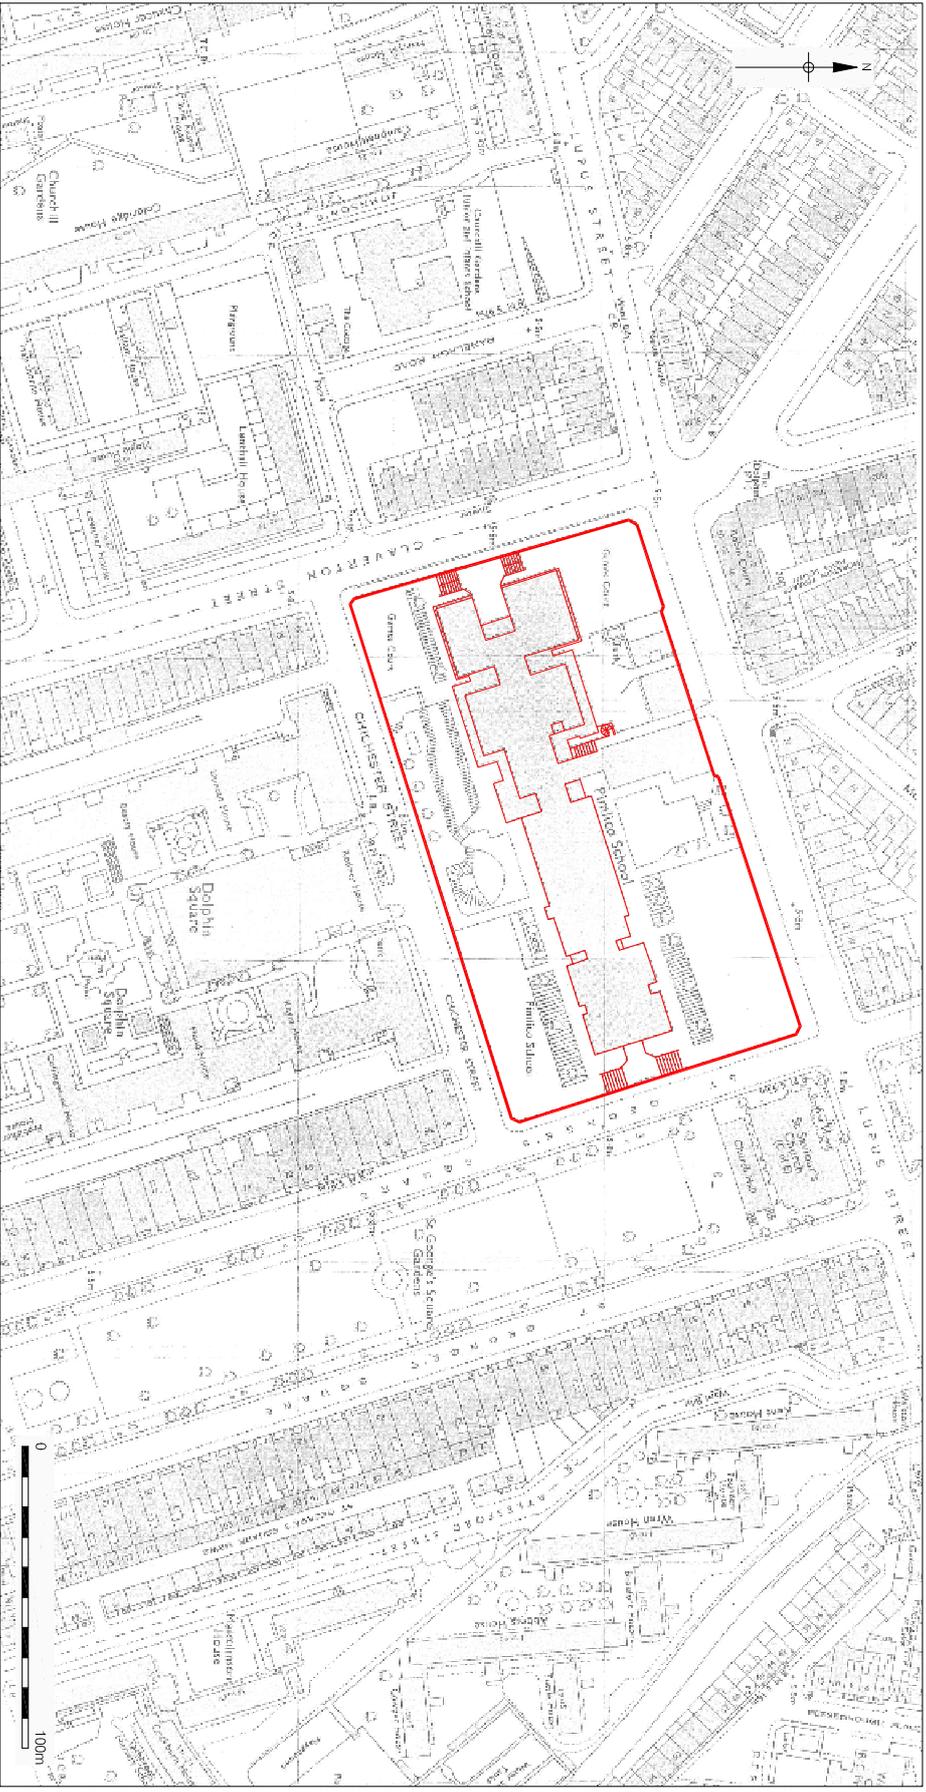

Reproduced from the 1973 1:250 Ordnance Survey map with the permission of Ordnance Survey on behalf of The Controller of Her Majesty's Stationery Office. © Crown copyright PCA Ltd. Unit 54 Brockley Cross Business Centre, London SE4 2PD. Licence number 100020795.

© Pre-Construct Archaeology Ltd. 2008

Pimlico School
Figure 8
Ordnance Survey, 1973
1:2,500 at A4

5 BUILDING DESCRIPTION

5.1 General

- 5.1.1 The external elevations of the building, major and typical internal spaces and important architectural details have been recorded photographically.
- 5.1.2 The setting and major views of the building have been recorded photographically.
- 5.1.3 The original architect's plans have been annotated and updated to highlight features of interest within the building, and changes to the structure after the date of construction.
- 5.1.4 The building is located on a northeast-south-west access, overlying the original street plan that has been demolished to site the school. The school complex comprises of a single structure which sits within a 3 metre deep emplacement surrounded within its boundary with a series of designated play areas and vegetation. Access to the grounds of the school can be gained from Lupus Street, St George's Square, Chichester Street and Claverton Street. The main access into the school building is via the north-west, north-east and south-west.
- 5.1.5 The school was designed by the Department of Architecture and Civic Design for Inner London Education Authority in 1967, with the main architect Sir Hubert Bennett and the group leader and job architect John Bancroft.
- 5.1.6 Bancroft has described the structural element of the building as being formed of "lightweight in-situ concrete used in cross-wall, floor and roof slabs, and for external cladding" (Bancroft 1971; 833) (Plate 1).



Plate 1 View of Pimlico School from corner of Claverton Street and Lupus Street, looking south-east

- 5.1.7 The school design was based on a style of brutalism which was very popular in the 1950s and 1960s.
- 5.1.8 "It nearly always uses concrete exposed at its roughest (Beton Brut) and handled with over-emphasis on big chunky members which collide ruthlessly" (Fleming, Honour, Pevsner 1991; 63).
- 5.1.9 The majority of the rooms within the school have retained their original purpose. Often, the cupboards and store rooms have remained extant. The layouts of the rooms and the benching arrangements however have changed significantly.

There are very few, if any, original benches remaining. Scars on the floor and the original plans are the only evidence for their previous existence.

5.1.10 The group leader and job architect Bancroft states in his article for The Architects' Journal Information Library (1971; 833) that the building, partially due to the size of the site, was not designed to take into consideration the evolution and growth of the school. It was unable to expand either vertically or horizontally due to planning and space limitations.

5.1.11 The timetable for the project was:

“schedule of accommodation approved July 1964; block plan approved July 1965; preliminary scheme and estimate approved December 1965; town planning permission granted February 1966; tenders approved May 1967; order to start work June 1967; contract completed September 1970.” (Bancroft 1971; 826).

5.1.12 The surroundings of the school have not changed since the school was first constructed.

5.2 External Elevations

5.2.1 The external elevations of the building show a structure dominated by a glass roof and poured concrete surrounds.

5.2.2 The structure is of four storeys, and each room has been recorded and allocated a number (see plans).

5.2.3 The main access from Lupus Street to the school grounds is via two ramped entrances to the south-west and north-east of the street. Direct access to the building is via a concrete walkway in the centre of the street which leads directly to the first floor with a double-leaf pedestrian door. On the original plans this entrance is allocated for visitors (Plate 2). Children were to enter the building via two double-leaf pedestrian accesses from Claverton Street and St George's Square.



Plate 2 View of visitor's entrance to school, looking south

5.2.4 The boundary wall is formed of poured and shuttered reinforced concrete and the site is bounded on each side by a road. The gates that are in place on each side are those original to the building's construction. A set of railings cover the wall on each side of the gate to prevent people from climbing round them. The majority of gates were locked during school hours, limiting access to one gate from Lupus

Street for visitors, thus attempting to control the flow of students and monitor their attendance.

- 5.2.5 One of the requirements from the original design brief was to avoid lifts within the school. This dictated the height of the school and made necessary the reduction of the ground level to avoid a tower effect occurring which would impact on the setting of Dolphin Square.
- 5.2.6 The roofing and glazing were state-of-the-art at the time and the material used was created directly for this project.

“The glazing form was developed to give adequate lighting in the many deep rooms. Constructed of aluminium patent glazing, the roof is double with expanded PVC sheet in the interspace, side-wall glazing is single with mild steel opening lights. Horizontal and vertical fabric blinds control sunlight, and there is air-cooling in south-facing teaching rooms. The structure, including external walling, is of in-situ reinforced concrete using lightweight aggregate. Columns and load bearing cross-walls are on a 22ft 4in (6.8m) grid; suspended floors and roofs are solid flat slabs without beams. The concrete is unfaced from the shutter. External surfaces generally are ribbed either horizontally or vertically, depending on position, or cast against a sawn board shutter. Internal faces, including soffits to floor slabs, are smooth finished, decorated directly with textured plastic paint.” (Bancroft 1971; 826).

- 5.2.7 The formwork used for the construction of the school is commonly called shuttering. This term indicates the form the 'wet' concrete takes once it is poured. The shuttering is normally constructed of timber or braced metal. Once this has been removed, the concrete is "found to have the texture of the material imprinted upon the surface" (Fleming, Honour, Pevsner 1991; 159). (Plate 3)



Plate 3 View of detail of buttress on west end of school, looking west

- 5.3 Interior
- 5.3.1 The structure is of four storeys, and each room has been recorded and allocated a number (see plans).
- 5.3.2 The colour scheme of the interior has been altered since the original concept. There were complaints (pers. comm. Mr Callway, Learning Manager, Pimlico School) that the original monochrome effect broke the flow of the light and space around the building and therefore it was changed to the modern colour scheme of grey/white and red.
- 5.3.3 The lower ground floor (Fig 9 and Fig 10) consists of a series of various sized rooms, used for teaching, kitchens, boilers and care taker rooms. These rooms are marked on the original plan (Fig 9) and their use has largely remained the same. The area to the south-west is dominated by small, inter-connecting rooms serving as storage and changing rooms for the swimming pool and gyms located at the far south-west of the building.
- 5.3.4 The area to the north had been allocated as woodwork, engineering and metalwork. These rooms have lost their original machinery, although fragments remain and scars on the floor show their previous locations (Plate 4). The rooms

are now geared towards design and computer related subjects, something not envisaged by the original architects.



Plate 4 View of school from Dolphin Square, looking north-east

- 5.3.5 The rooms towards the north east of the structure consist of classrooms for science and textiles.
- 5.3.6 The ground floor (Fig 12 and Fig 13) consists of a series of various sized rooms, used principally for teaching. There are a number of toilets and cloakrooms as well as offices to the north-east.
- 5.3.7 Access to this level is via four entrances at street level. From Claverton Street to the south-west there is a double gateway leading into the school grounds and then a row of double-leaf pedestrian doors leading into the school building. The same applies to the access via St George's Square on the north-east side of site. Both of these accesses are allocated for children on the original Architects' plan (Fig 12). The third access is via a concourse from the centre of Lupus Street on the north-west side of site. This concrete walkway leads to a flight of stairs up to first floor level, this access had been allocated for visitors on the original Architects' plan (Fig 12). A further access from Lupus Street is via a vehicular ramp which leads down to the lower ground floor level and playground area, this had been allocated for services. At the time of writing, this had an electric gate which could be operated by a remote control.
- 5.3.8 A later access has been added to the north-east of Lupus Street. This is also a vehicular ramp which leads down to the lower ground level and playground area.
- 5.3.9 Most rooms in the building are authentic to the original design, and continue to be used for their original function. However, the ground floor has a series of alterations to the north-east. This floor was designated as a reception area for children where they would organise themselves at the beginning of the day in a series of cloakrooms, toilets and house rooms. Over time, fashions have changed and there are no longer requirements for cloakrooms and the number of toilets were reduced.



Plate 5 View of a typical woodwork room, showing evidence of scarring on floor, looking east

- 5.3.10 A number of modern partitions have been added to the north-eastern end of the ground floor creating a number of new spaces and altering some original spaces to create offices from the original cloakrooms and toilets. The entrance to the north-east side which leads out to St George's Square has been narrowed to create larger office spaces for teachers. Further to the centre of the ground floor, located in what was originally a wide corridor by the stairs, a large modern partitioned room has been constructed as well as a storage cupboard under the stairs.
- 5.3.11 A modern ramp has been inserted to the south-west of the modern room which allows wheeled access from one side of the ground floor to the other. The ground floor is divided by three steps leading up to the north-east side.
- 5.3.12 Modern partitioning has been added to room G38, dividing what was once a large open-plan room designated as 'House 4' into a series of smaller offices and work spaces used as learning support.
- 5.3.13 All of the original internal benching of this area has been removed and replaced mostly with modern benching located around the walls of the rooms.
- 5.3.14 The potential for of modern subjects such as Computing, were not considered within the original brief and therefore rooms have had to be adapted to suit. The decline of traditional subjects like woodwork and technical construction has meant the removal of the majority of machinery used for these classes and alterations of the layout of the rooms.
- 5.3.15 The flow of pupils and ease of movement around the building gave the architects a great deal of trouble. An attempt was made to ease congestion around the entrances and corridors regularly used by the children moving from class to class. The circulation routes were described by Bancroft (1971; 826) as "...a river and its tributaries".


"The building allows easy movement and helps people to meet and congregate. As a result, however, a large area has been taken up by circulation. This fact, combined with cost limits, has caused many of the teaching spaces to be of very limited size. The concourse is empty for long periods of time and it must be asked whether it could not have been broadened and used for more educational and social purposes."(Bancroft 1971; 833)


- 5.3.16 Unfortunately, the large hallways of the ground and first floor caused several problems for the teaching staff who had to deal with the noise levels and echoes, the loitering and disruptions that were caused by having space for a large number of pupils to congregate (pers. comm. Mr Callway, Learning Manager, Pimlico School). (Plate 6)





Plate 6 View of Library up to corridor above, looking west .

- 5.3.17 The practicalities of every day school life has changed some of the purposes for the rooms. At the time of completion, a Mr Green was designated as head teacher and it was he who initially adapted the rooms to fit the schools working requirements. The internal organisation of the school changed from the architect's vision of Houses into year groups, which meant the some of the designated rooms had to be altered and the school functioned in a slightly different manner than was originally planned.

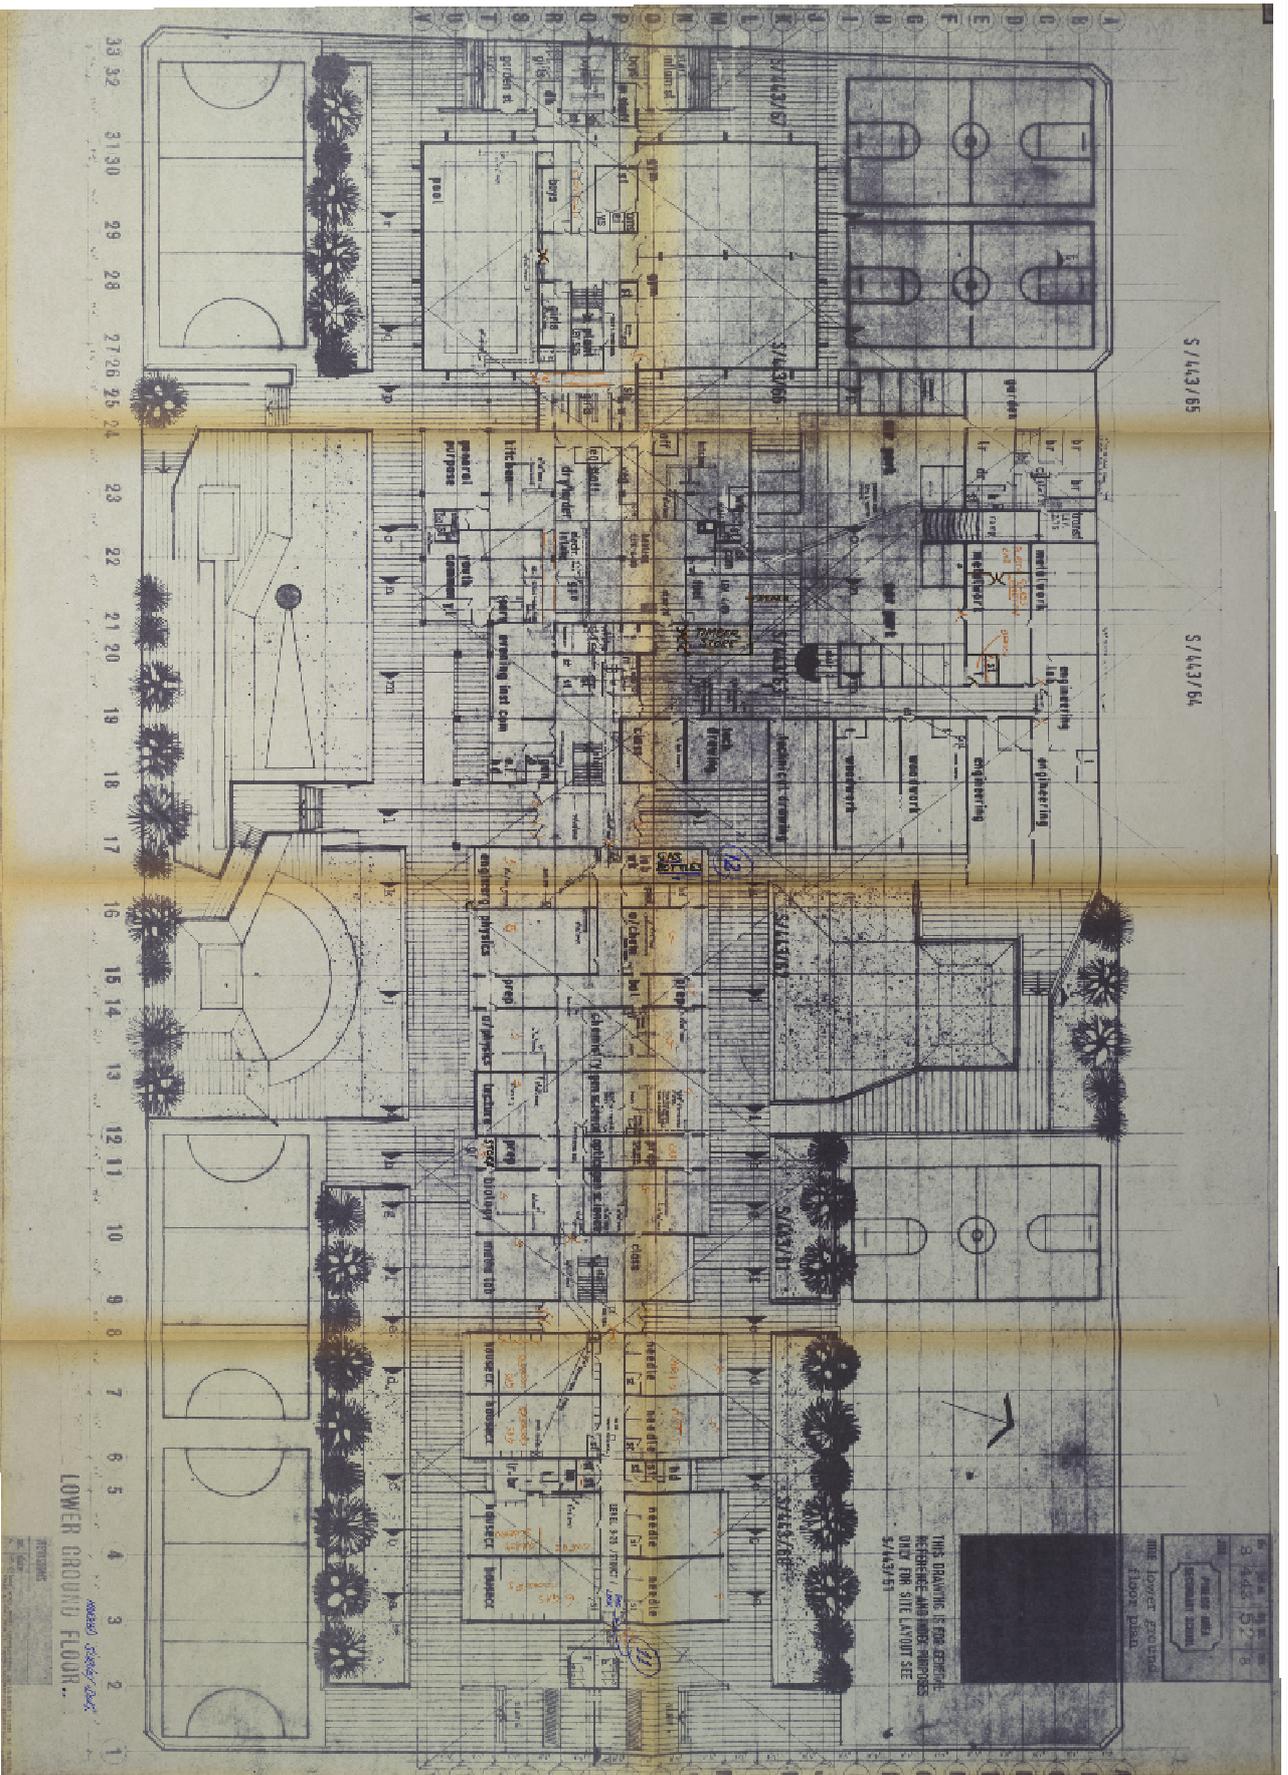


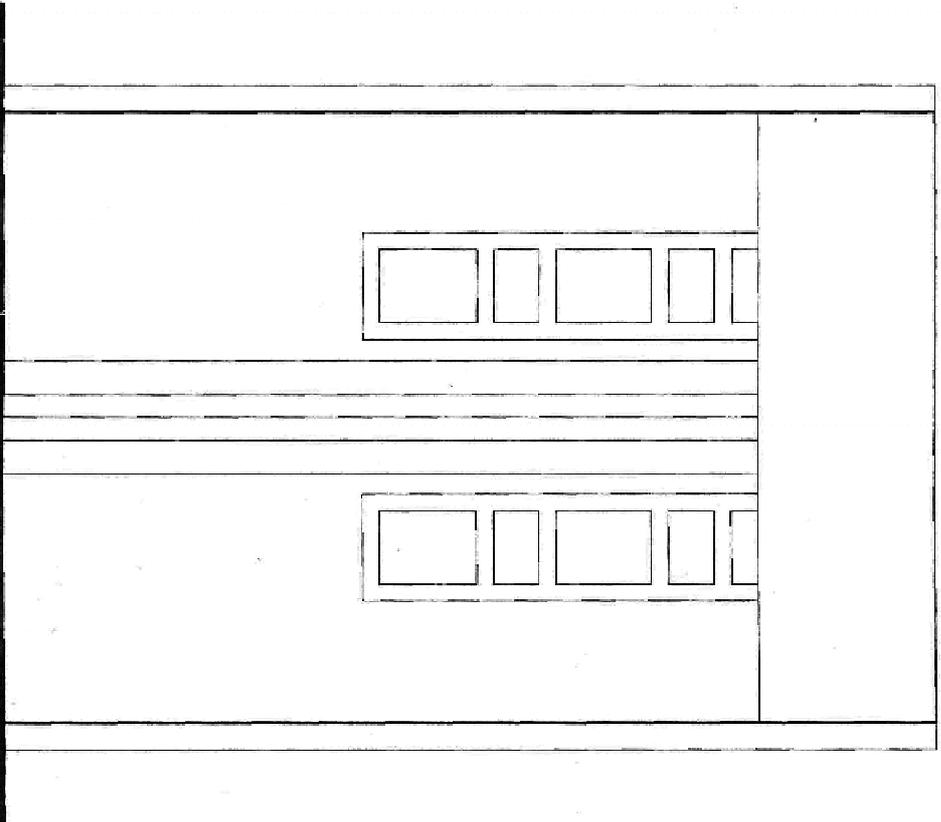

INTERNAL FINE DOORS SCALE 1:20

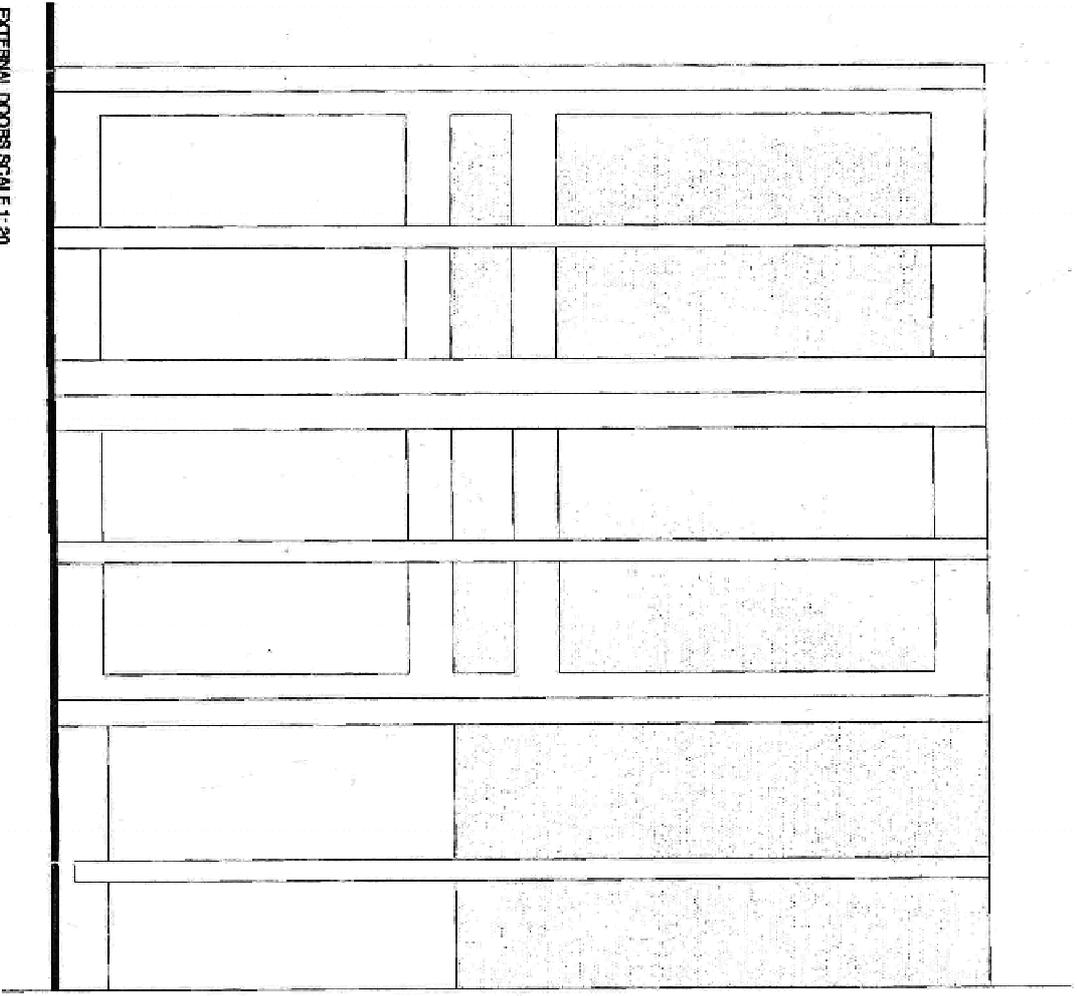

EXTERNAL DOORS SCALE 1:20

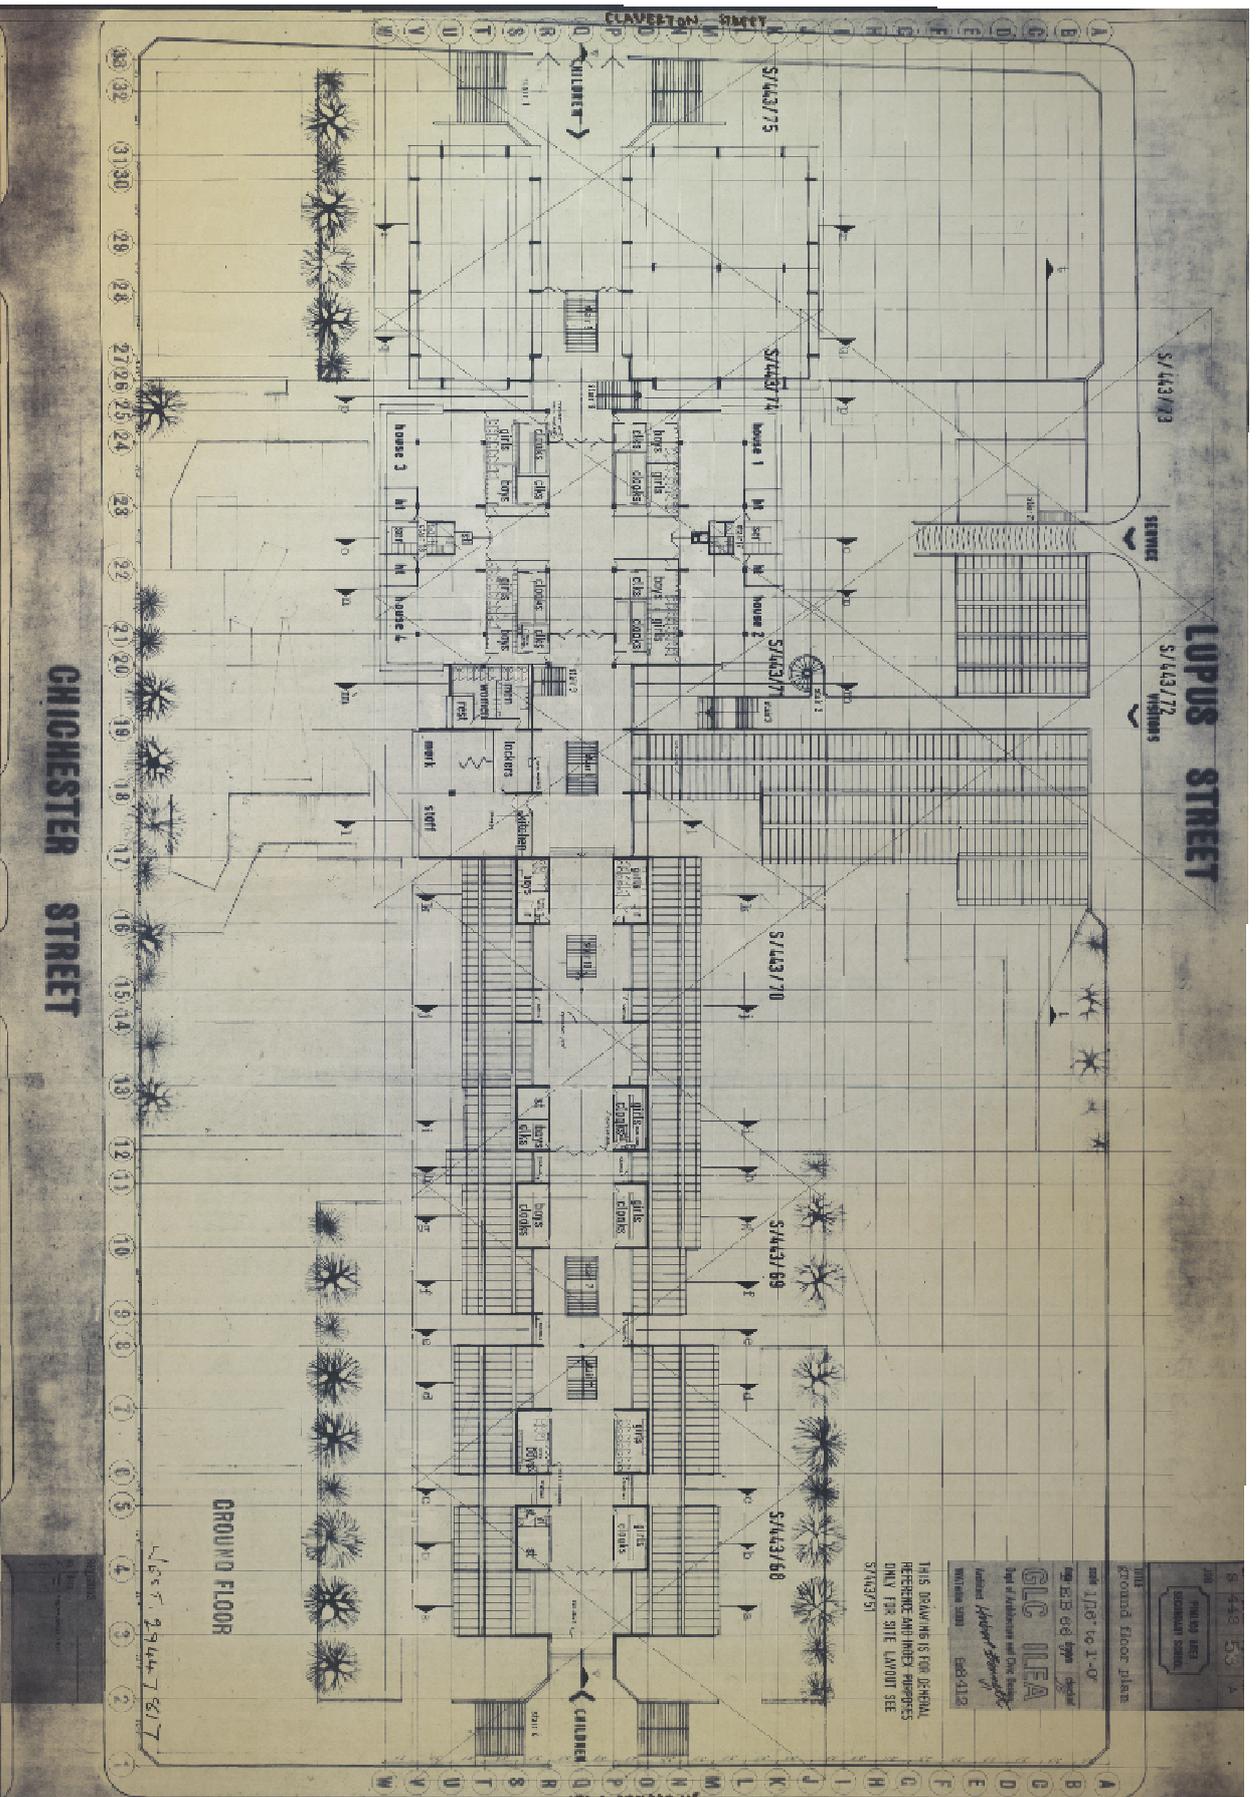

Original drawing created by GLC, ILEA Department of Architecture and Civic Design. Architect: Hubert Bennett



©Pre-Construct Archaeology Ltd 2008


Pimlico School

Figure 12


Original Architects' plan, ground floor

Not to scale

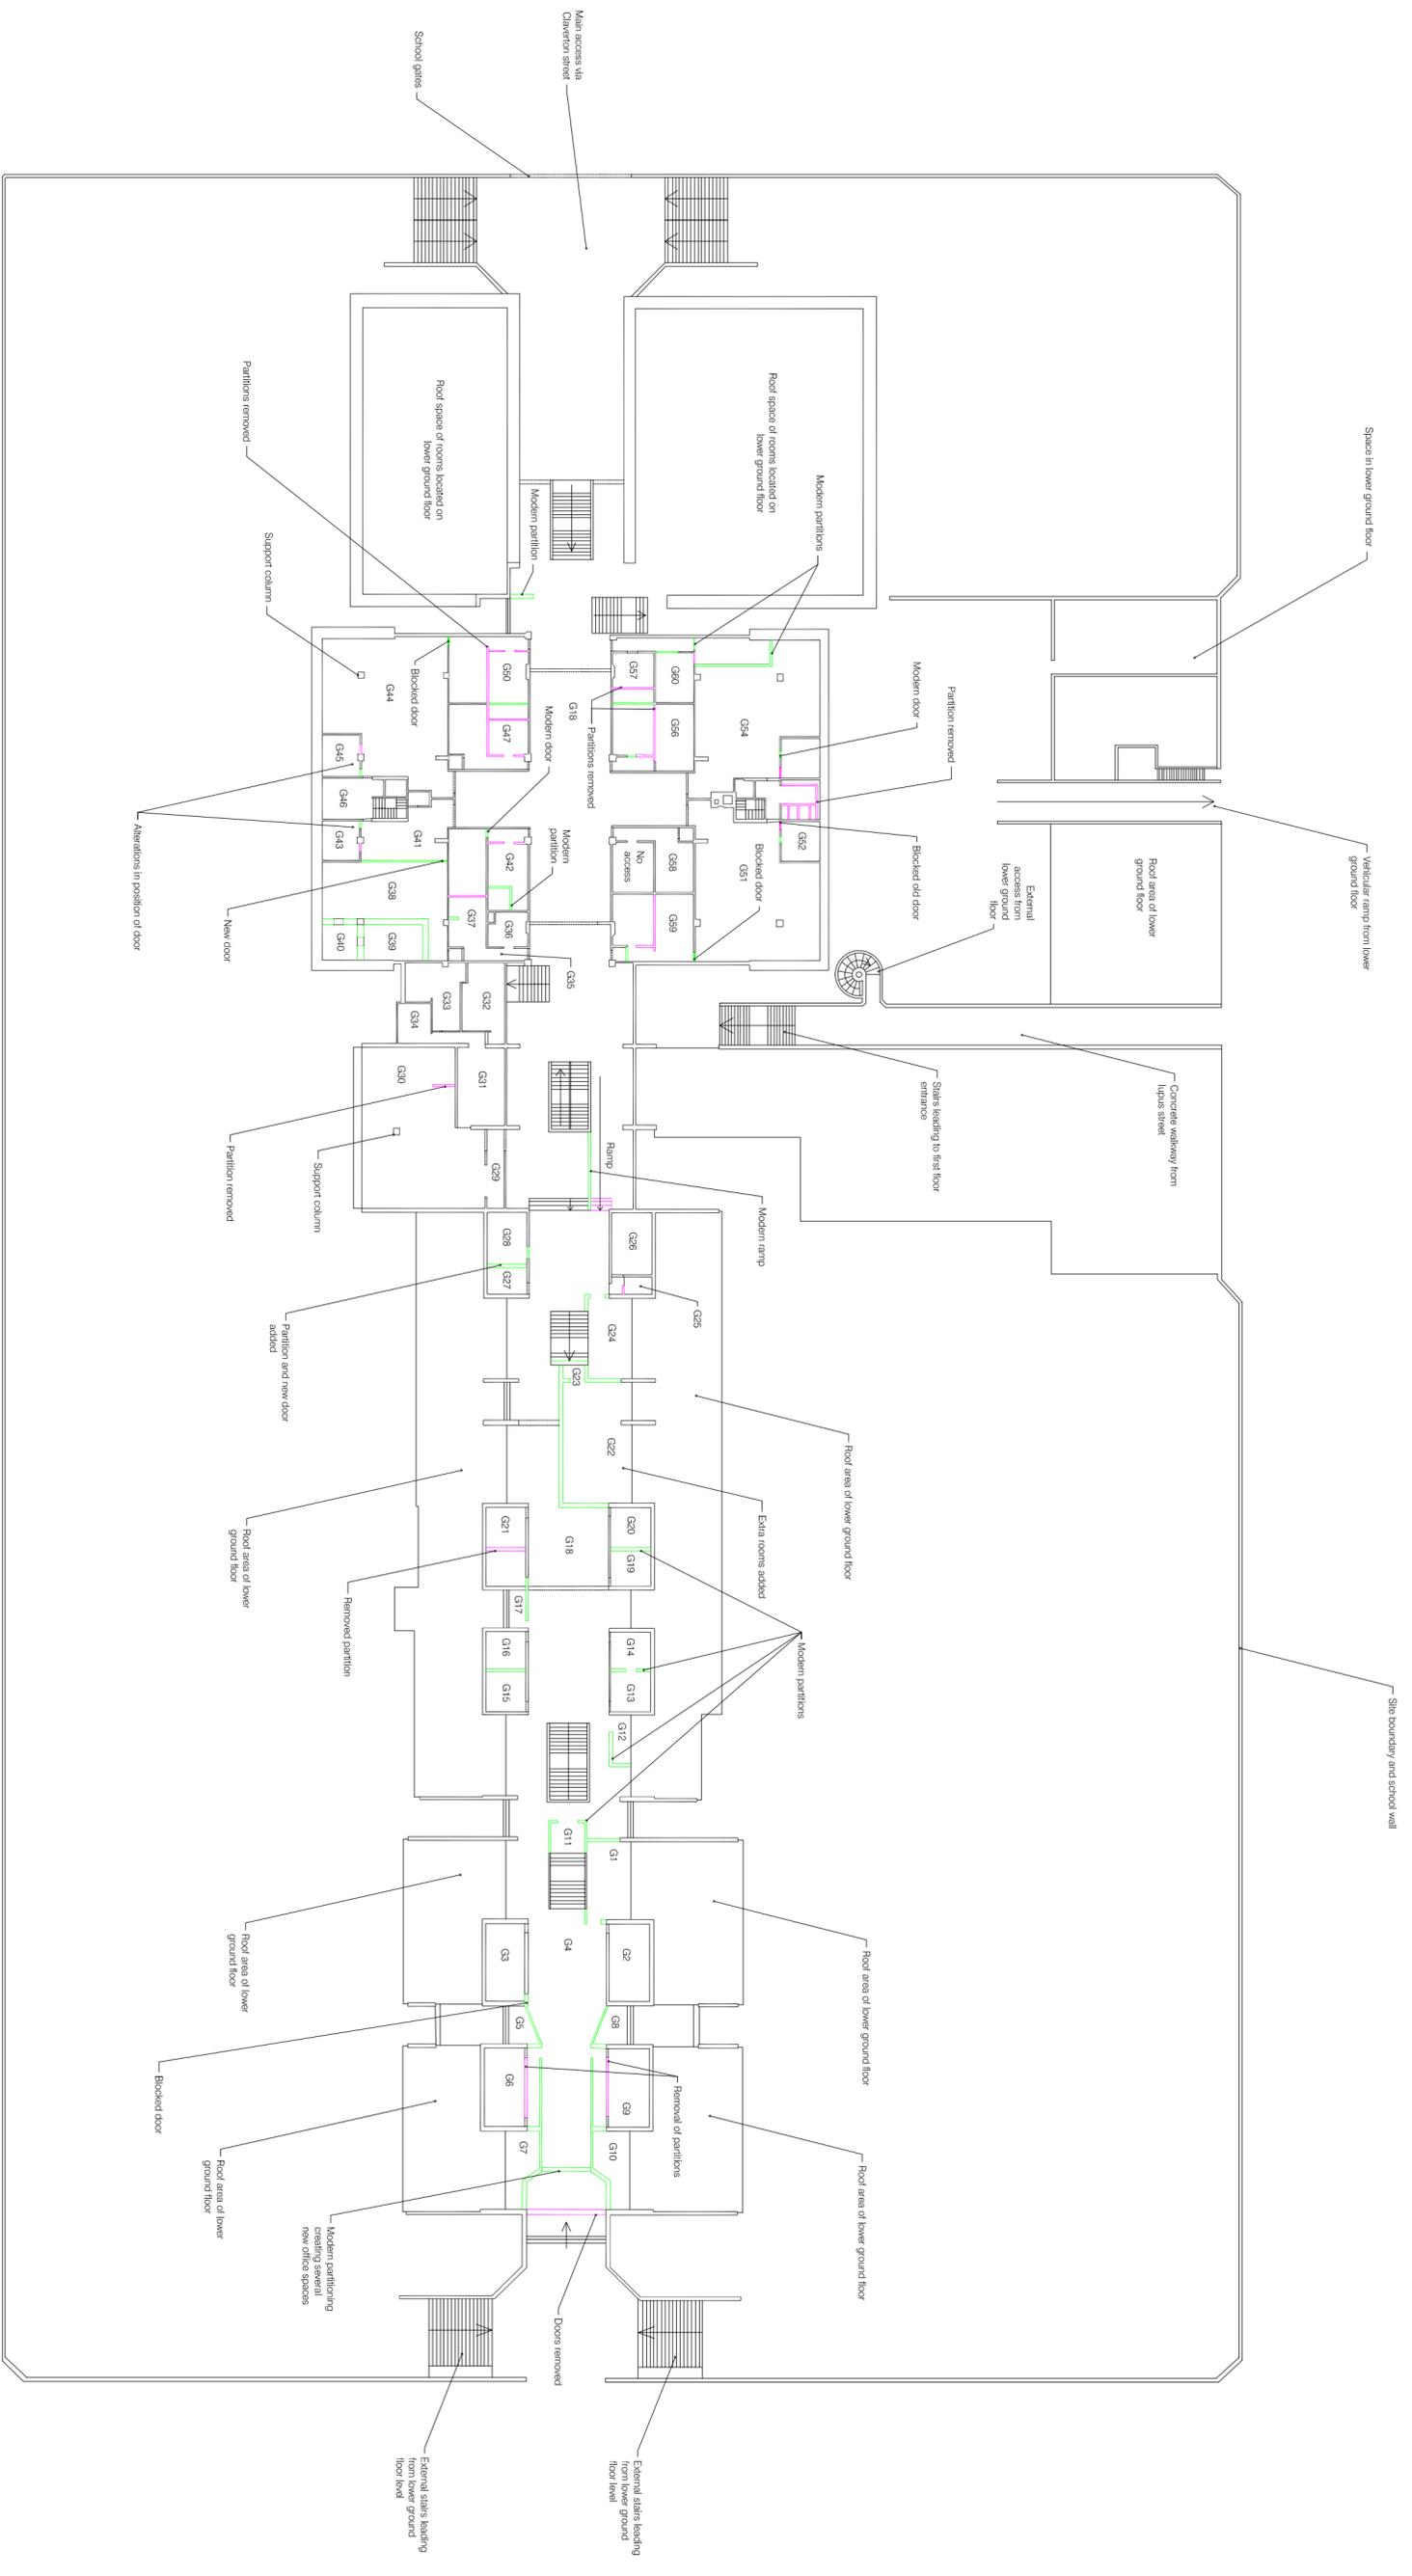

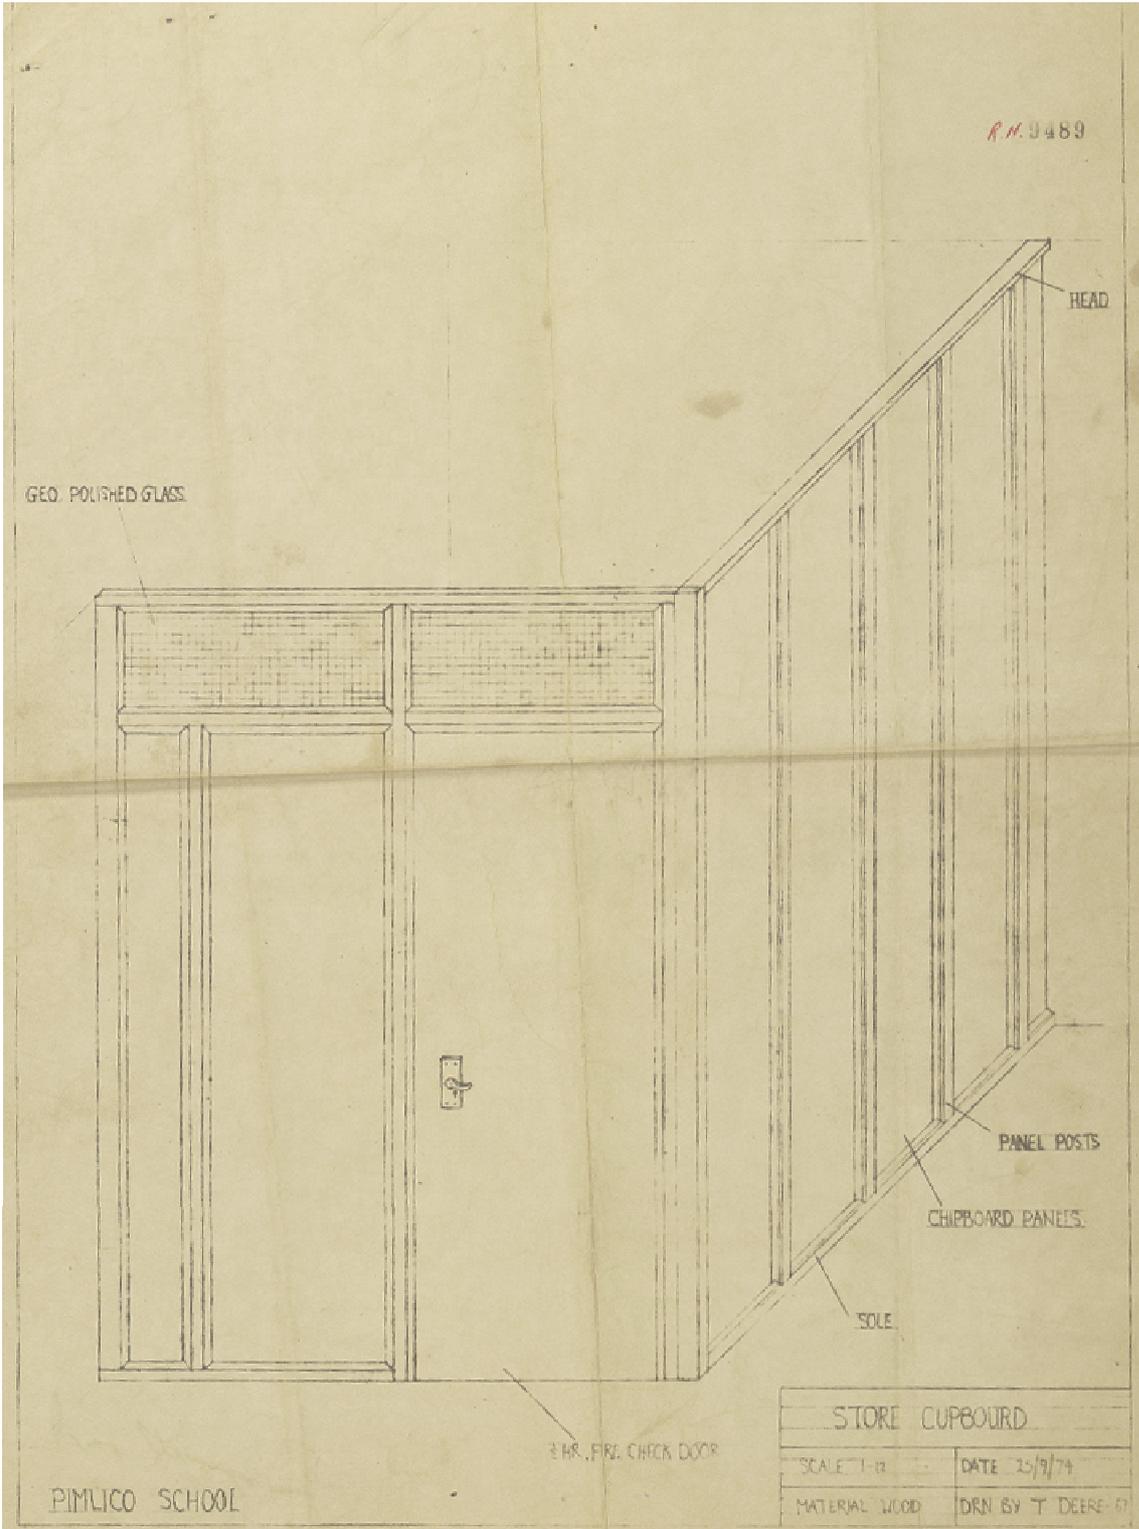

Pimlico School
 Figure 14
 Original Architects' detail drawing of store cupboard
 Not to scale

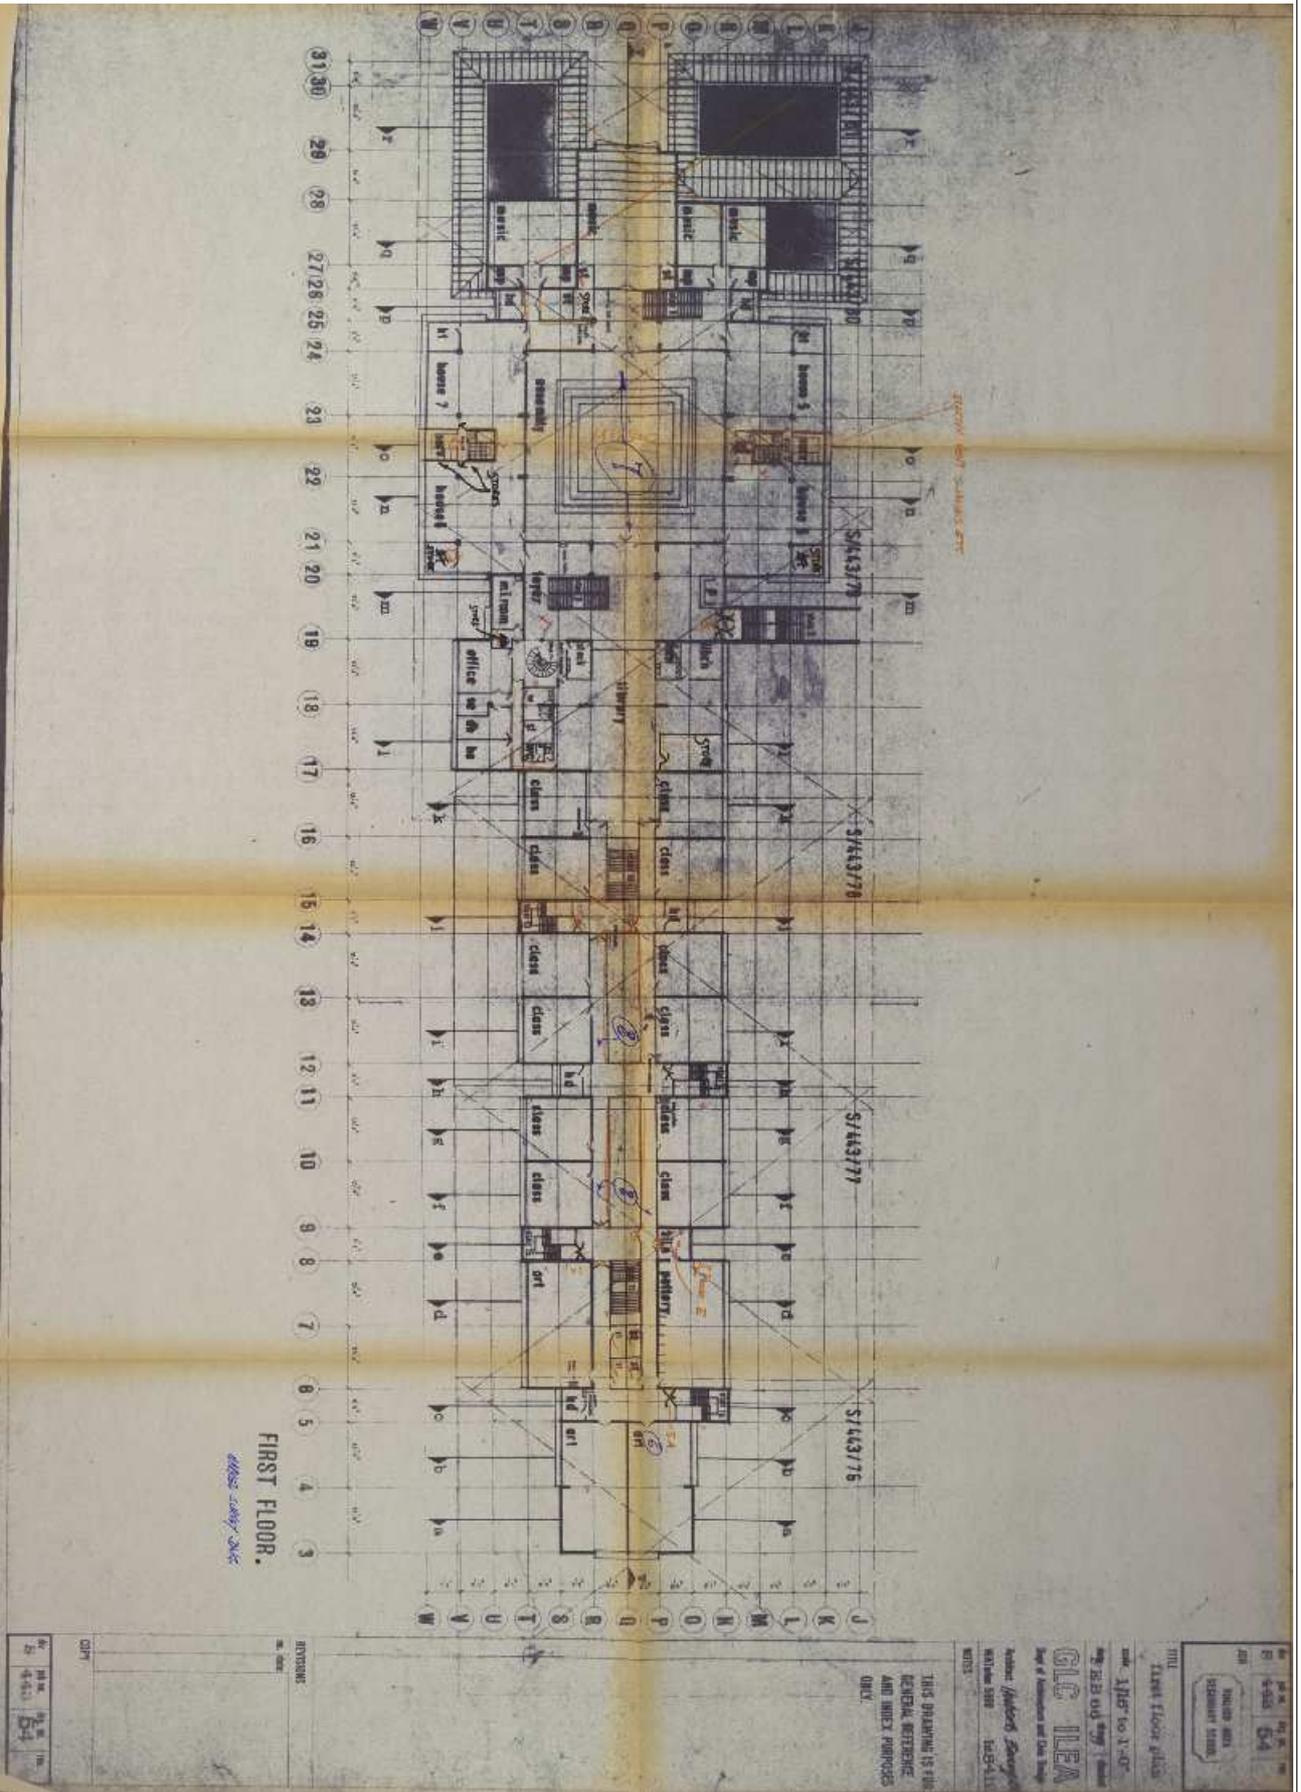



FIRST FLOOR.


Hubert Bennett 1964

DATE	BY	NO.	REVISIONS
1964	H.B.	1	
1964	H.B.	2	
1964	H.B.	3	
1964	H.B.	4	
1964	H.B.	5	
1964	H.B.	6	
1964	H.B.	7	
1964	H.B.	8	
1964	H.B.	9	
1964	H.B.	10	
1964	H.B.	11	
1964	H.B.	12	
1964	H.B.	13	
1964	H.B.	14	
1964	H.B.	15	
1964	H.B.	16	
1964	H.B.	17	
1964	H.B.	18	
1964	H.B.	19	
1964	H.B.	20	
1964	H.B.	21	
1964	H.B.	22	
1964	H.B.	23	
1964	H.B.	24	
1964	H.B.	25	
1964	H.B.	26	
1964	H.B.	27	
1964	H.B.	28	
1964	H.B.	29	
1964	H.B.	30	


TITLE: Pimlico School
 DRAWN BY: H.B.
 CHECKED BY: H.B.
 SCALE: 1/4" = 1'-0"
 PROJECT NO.: 100-111
 SHEET NO.: 54
 DATE: 1964

THIS DRAWING IS FOR
 GENERAL REFERENCE
 AND NOT FOR CONSTRUCTION
 ONLY.

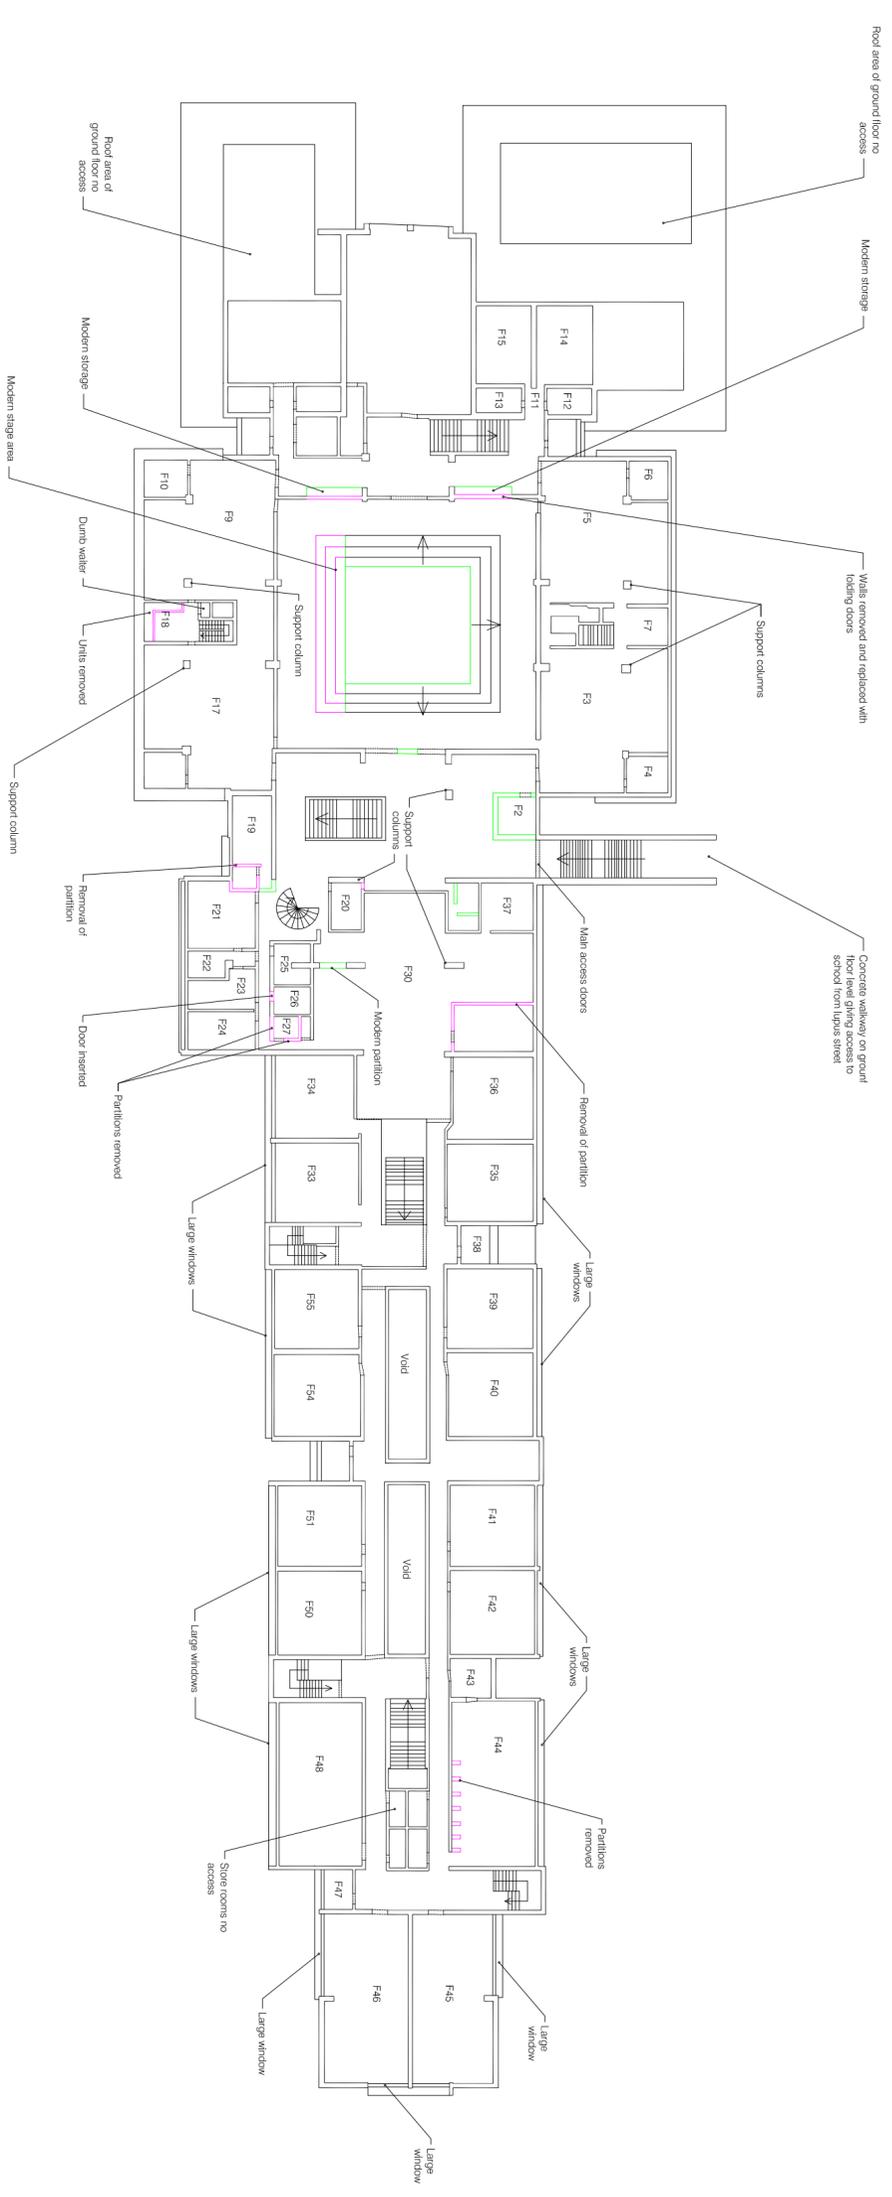

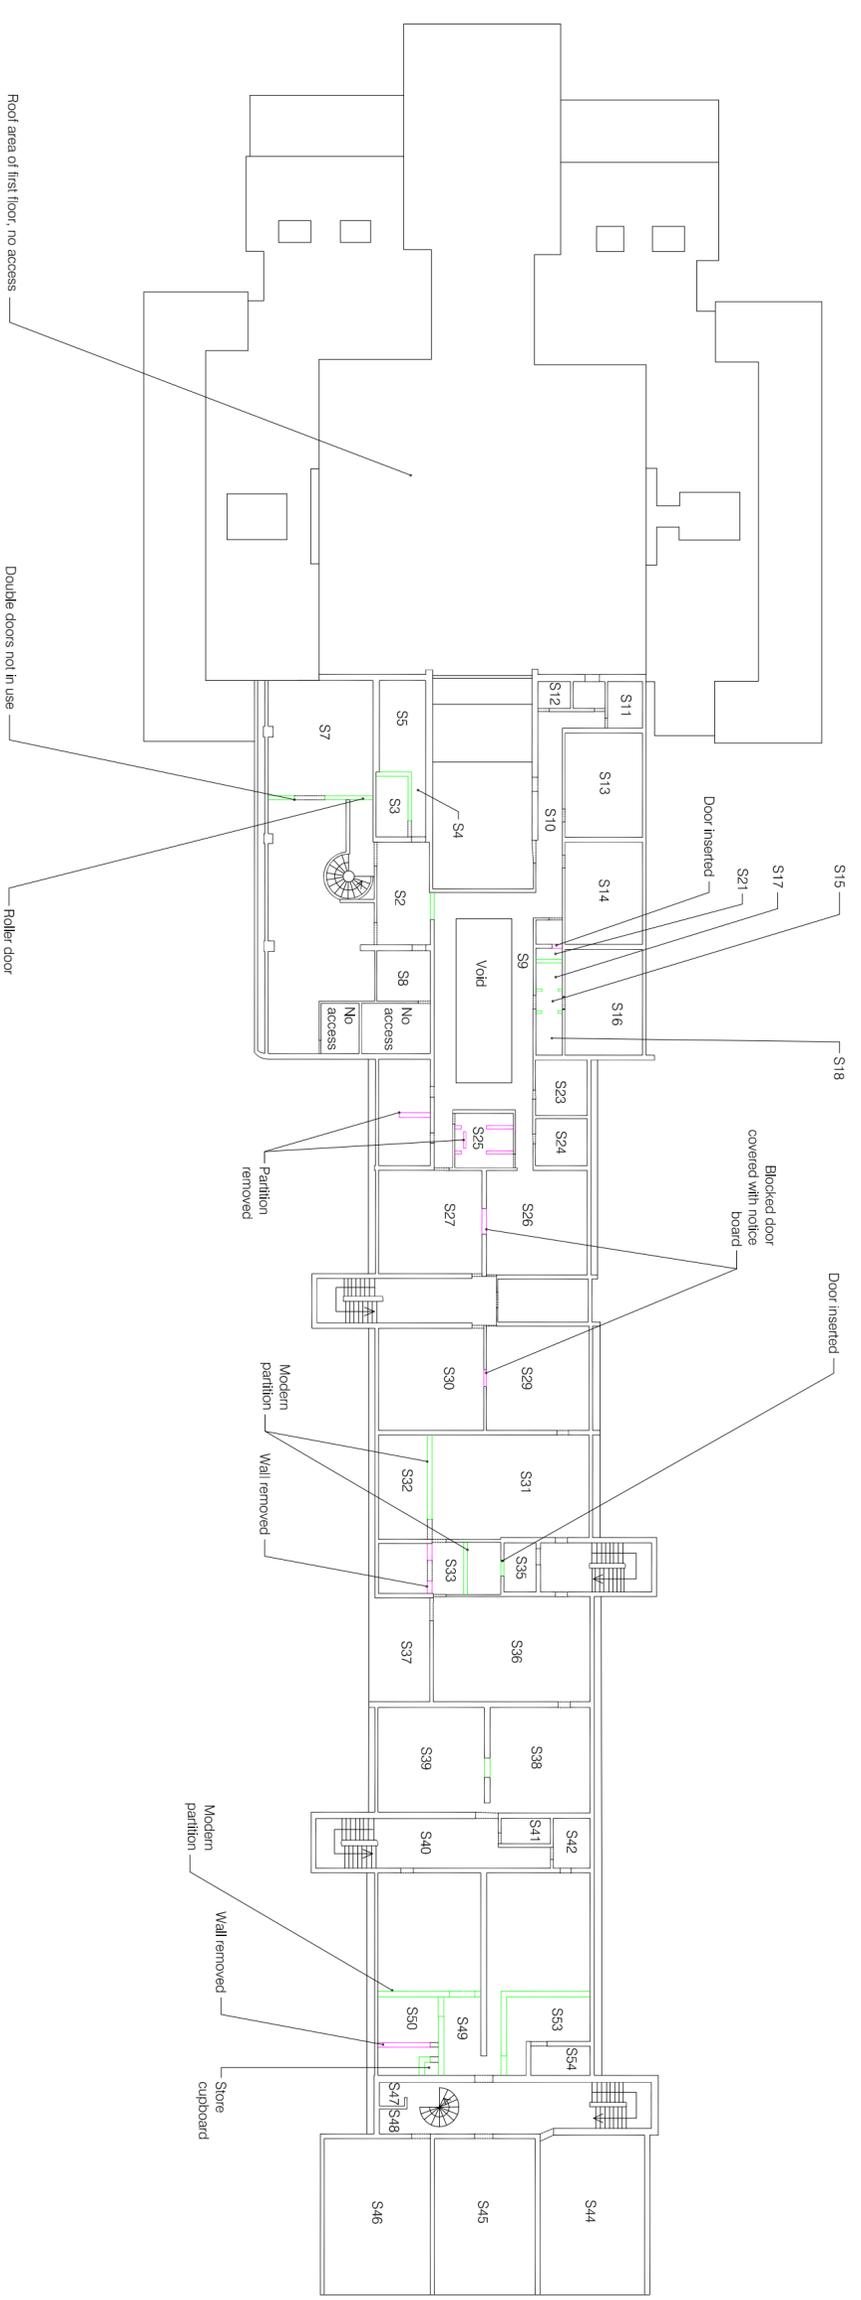

Key	
—	Additions
—	Demolitions

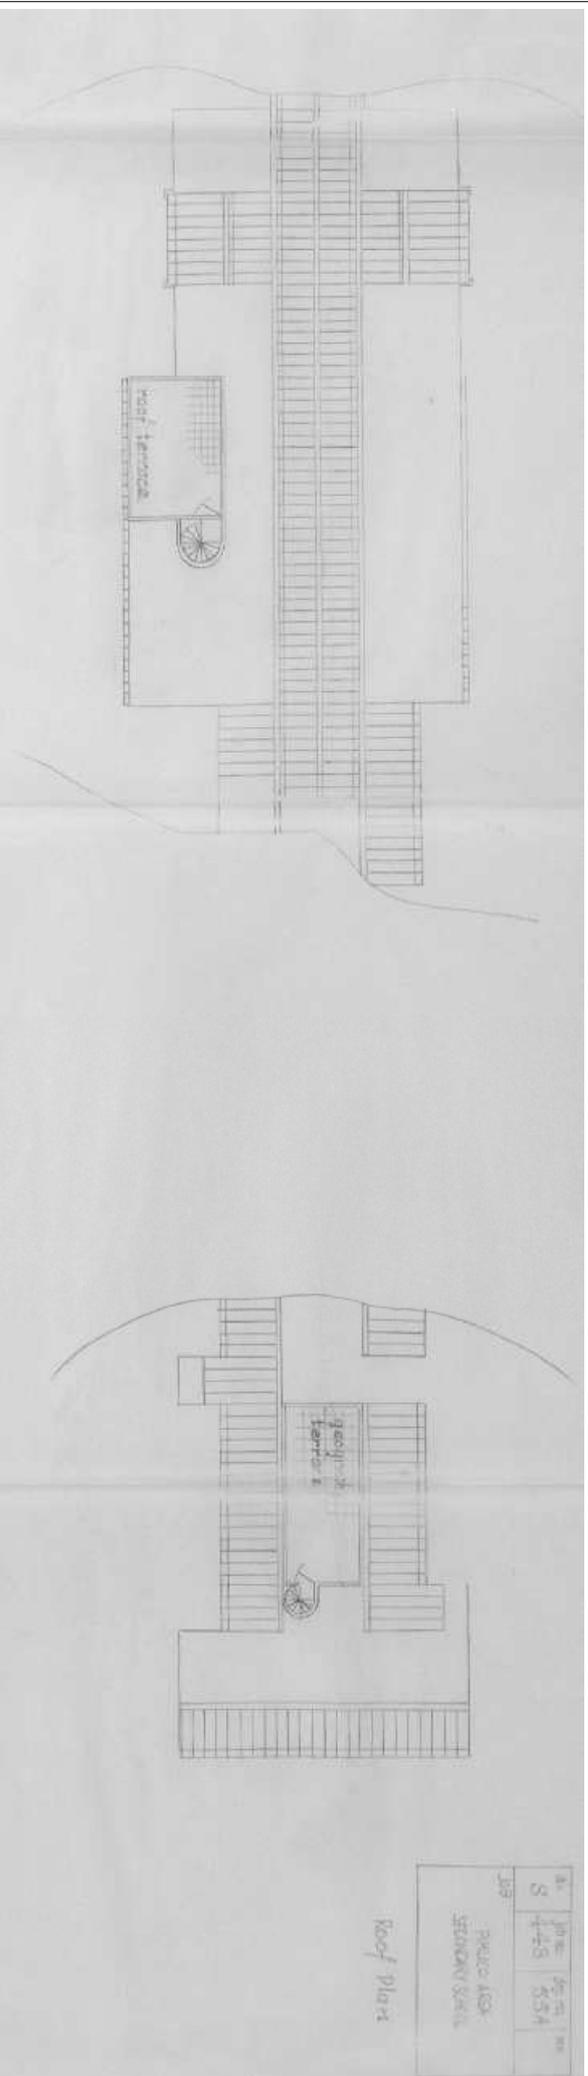

6 Historic sequence

- 6.1 The fabric of the buildings appears to be largely original, though some alterations have been made over time and most of the original fixtures and fittings have been removed.
- 6.2 Phase 1: 1600s to 1830
- 6.2.1 Before the construction of the school, the site was part of an area occupied by large gardens and orchards. The 1793 map (Fig 3) shows the layout of the gardens at that time. The land belonged to the Abbott of Westminster and the produce was regularly sold in London markets.
- 6.2.2 The gardens remained on the site until the early 1830s when the land was bought and redeveloped for housing. The 1827 map (Fig 4) shows the gardens and the associated 'Neat Houses' to the south. The northern boundary of the site is now clearly delineated by Crofs (Cross) Lane to the north which separates the original unbroken field system.
- 6.3 Phase 2: 1830 to 1960s
- 6.3.1 The first map to clearly show the boundary of the site is that recorded by Bacon in 1888 (Fig 5). The site is bounded by streets on all sides, with three streets running northwest-southeast within the site showing the buildings designed in the 1830s by Thomas Cubitt and associates. This map is slightly inaccurate, showing the southern boundary further south than it is.
- 6.3.2 Bacon also drew a later map of the area (Fig 6), showing the area of the site and its occupation by housing blocks within three streets. This time however, the north-eastern boundary of the site is inaccurate. Bacon has located the streets much closer together than in reality they would be and therefore, St George's Square which forms the north-east boundary of the site is too far to the south-west. The drawings of the structures themselves are also very basic and the map does not allow for any detail of the houses or the associated gardens and outbuildings connected to each in the row.
- 6.3.3 The raids over Britain in the 1940s did considerable damage to the area around Pimlico with several houses on the streets located within the site boundary damaged beyond repair.
- 6.3.4 The first map to show the true and correct boundary of the site occurs on the Ordnance Survey Map of 1950 (Fig 7). This goes into far greater detail for the houses that were previously located within the school site. The streets can be clearly identified as Colchester Street, Cornwall Street and Worcester Street with their individual garden areas. There are also large areas that are recorded on this map as gaps. This is likely to be due to the destruction of a number of properties around the area by bombing raids during the Second World War. A large proportion of the north-east side of Worcester Street appears to have been removed, as well as patches on the south-west of Cornwall Street, the north-west of Chichester Street and the north-east of Claverton Street. The surrounding area also appears to have suffered heavy damage with sizable blocks erased on the north-east side of Ranelagh Road to the south-west of the site, and very noticeably on the north-west side of Lupus Street to the north-west of the site.
- 6.4 Phase 3: 1960s to 2005
- 6.4.1 The demolition of the damaged structures and the general state of dilapidation amongst the remaining buildings led to the site being identified for complete redevelopment. By 1967, the design for the new school had been completed and the work onsite began. The school was completed and opened in 1970 to accommodate 1,725 children.
- 6.4.2 The first map to show a structure or structures which appear to correspond with the present-day school building is the 1973 Ordnance Survey map (Fig 8). The

detail on the map is elaborate, showing the outline of the structure and its associated outbuildings and playground area. (Plate 7)



Plate 7 View of school from Dolphin House, looking north

7 CONCLUSIONS

7.1.1 The design of the school had been subject to a number of complications and constrictions.

7.1.2 The major constriction of the design was the site. The site size was limited and a great deal smaller than those given over for the construction of schools at that time. The building had to provide teaching accommodation for 1,725 children while still leaving enough space between the new building and its surroundings.

7.1.3 On the lower ground floor of the school, particularly at the western extent, a number of partitions had been added within classrooms. When the school was built, the classrooms were designed to be spacious, and allow free movement of students and teachers between rooms and corridors through numerous interconnecting doors. The intention was for large classes to be taught in large classrooms by multiple teachers, in a flexible and interactive manner. At a later date, possibly around the 1980s, many of these large classrooms were subdivided to allow a more traditional teaching technique, and the number of interconnecting doorways reduced.

7.1.4 The school was built in the Brutalist style which was very popular in the 1950s and 60s:

“It nearly always uses concrete exposed at its roughest (Beton Brut) and handled with over-emphasis on big chunky members which collide ruthlessly” (Fleming, Honour, Pevsner 1991; 63).

7.1.5 ‘Beton Brut’ is described as ‘concrete in the raw’:

“concrete left in its natural state when the formwork has been removed. Sometimes special formwork is used to show clearly the timber graining on the concrete surface.” (Fleming, Honour, Pevsner 1991; 45)

7.1.6 It is also known as board-marked concrete. (Plate 8)



Plate 8 View of shutter marks on concrete, looking north-northwest

7.1.7 At ground floor, the original design laid out numerous cloakrooms and toilet blocks. Entrances for the children were located at the east and west ends of the school, leading into the long central corridor. At the west end were staff rooms and form rooms. The intention appears to have been for children to enter the school, store their bags, use the toilets if necessary, then go to their form rooms to start the day. Visitor's access was located at first floor level, leading from Lupus Street on an elevated walkway, separated from the functional busyness of the cloakrooms, toilets blocks, form rooms and staff rooms. In more recent years,

all of the cloakrooms and many of the toilet blocks have been changed into offices through the removal of fittings and addition of partitions and doorways. In the central hallway, a ramp has been added alongside steps in the central corridor to allow disabled access from the west to the east of the ground floor.

- 7.1.8 At first floor level, only minor alterations have taken place. A reception booth has been added next to the visitor's access, and in the assembly hall a stage has been added to the seating arena.
- 7.1.9 At second floor level, also, only minor alterations have been made. Several very large classrooms have been subdivided, as seen at lower ground floor. Access arrangements are largely original, with numerous interconnecting doors. This floor contains no large communal areas. Teachers expressed a preference for this layout, as it offered fewer opportunities for students to congregate and talk.
- 7.1.10 The swimming pool and music areas remained largely unaltered, though the pool was out of use and had been drained.
- 7.1.11 At the exterior of the school, within the revetment to the surrounding roads, were originally a number of recesses. These were re-used cellar spaces from the terraced housing which formerly occupied the site, and were intended for dry storage (bicycles, bins etc.) and shelter in wet weather. However, these were all blocked at the time of survey. Teachers told survey staff that the opportunities these spaces provided for pupils misbehaving resulted in their removal.
- 7.1.12 One of the principal design features of the school was its generous provision of windows, intended to create airy, light spaces. Many of the walls are glass infill, and the butterfly roof has numerous skylights built into it. At the time of survey, many of the windows had been blocked or painted over, to prevent glare and overheating. Glare, overheating and poor ventilation appear to have been major problems caused by the design, although these problems were most severe in the upper floors. The design was more successful in classrooms on the lower ground floor, as there were no skylights and the apertures of the windows were smaller, meaning natural light was steadier and more diffuse.
- 7.2 There were height restrictions on the structure to prevent it from overpowering its surroundings and also to prevent the introduction of passenger lifts.
- 7.3 A further condition that constrained the construction and upkeep of the building was one of cost. The cost of the site, being located in a central area of London, raised the price considerably and the total cost was estimated at nearly £1 million pounds in 1966. With this in mind, it was believed that:

"One great advantage of the central circulation route is that it will provide a space...for continuous movement of children up and down the length of the school"(Bancroft 1971; 828).

- 7.3.1 Original design features which were recorded include the integrated fire alarm system (Plate 9), which comprised an intercom system for reporting incidents rather than the traditional bell-trigger system; the public address system; a control box for the adjustable external shutters; the pulley system and runners for internal blinds; cupboards; doors; bases and emergency stop buttons for woodworking machinery (now removed), and brackets for blackboards (now removed).

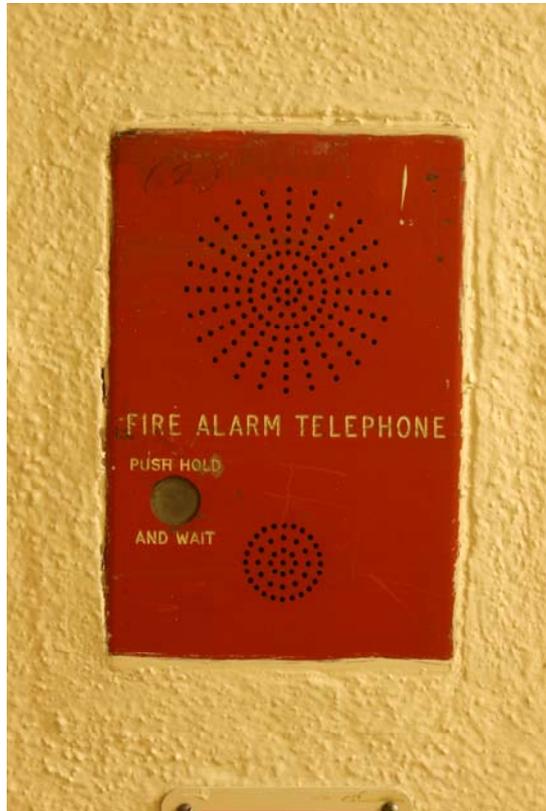


Plate 9 View of original fire alarm located on lower ground floor, kitchen, looking east-northeast

- 7.3.2 Pimlico School was designed to accommodate a progressive style of teaching, involving large classes, multiple teachers and flexibility in physical movement between classrooms and subjects. However, in later years it was altered to fit a more traditional style of teaching, with single teachers and small classes. Despite problems with many of its innovative design features, particularly the number of windows, the way in which the building forms and controls routes of movement and activity zones is still very successful. The classrooms on the lower ground floor have achieved the balance of space and light which was intended, and provide an optimal learning environment. In general, it appears that the pioneering design of the building has been let down by its materials, which have introduced functional and aesthetic problems through their poor survival and unappealing weathering.

8 Acknowledgements

- 8.1 The authors and PCA Ltd. would like to thank Bouygues UK Ltd for commissioning the work, and also the staff of the City of Westminster Archives Centre for their help.
- 8.2 The authors would like to thank Kari Bower and Strephon Duckering for their recording work on site, and Ruben Lopez for producing the CAD illustrations.

9 BIBLIOGRAPHY

Bancroft, J. 1971. Architect's Account. The Architects' Journal Information Library 14 April 1971, p826-830.

Carrington, R. 1983. *Westminster City School and its Origins*. Bath: The Pitman Press

Callway, S 2008 [Learning Manager, Discussion on Pimlico School and issues surrounding the design] (Personal communication, 8 April 2008)

Dixon, R and Muthesius, S. 1997. *Victorian Architecture*. Singapore: C.S. Graphics

Department of the Environment (DoE), 1990. Planning Policy Guidance 16: archaeology and planning (PPG16)

Department of the Environment (DoE), 1994. Planning Policy Guidance 15: planning and the historic environment

English Heritage, 1991. *Management of Archaeological Projects* (2nd edition)

English Heritage (Greater London Archaeological Advisory Service), 1998.

Archaeological guidance papers

English Heritage, 2006. Understanding Historic Buildings: A guide to good recording practice

Fleming, Honour and Pevsner, 1991 *The Penguin Dictionary of Architecture*. England; Clays Ltd

Institute of Field Archaeologists (IFA), 2001. Standards and guidance for archaeological investigation of standing buildings or structures

Museum of London, 1994. *Archaeological site manual* (3rd edition)

Museum of London, 2002. A research framework for London archaeology

Lythe, R.. 2008. 2008. An Archaeological Evaluation at Westminster City School, City of Westminster Unpublished document, PCA Ltd

Rose-Deacon, A. 2007. Written Scheme of Investigation for Historic Building Recording of Westminster City School, 51-57 Palace Street, London SW1E 5JH. Unpublished document, PCA Ltd.

Royal Commission on Historical Monuments, England, 1996. Recording historic buildings: a descriptive specification

Saunders, A. 2000. *The Art and Architecture of London*. London: Phaidon Press Limited

Cartographic Resources:

Horwood, 1793 (scale 1:2,500)

Greenwood, 1827 (scale 1:10,000)

Bacon, 1888 (scale 1:10,000)

Bacon, 1912 (scale 1:10,000)

Ordnance Survey, 1950 (scale 1:2,500)

Ordnance Survey, 1973 (scale 1:2,500)

APPENDIX 1

Oasis Form

OASIS ID: preconst1-45756

Project details

Project name Pimlico School

Short description of the project Level 2 recording of Pimlico School undertaken by Pre-Construct Archaeology in two phases, the first taking place in February this year, the second in April. The building was designed in 1964 by lead architect Hubert Bennett and group leader and job architect John Bancroft of the Architects' Department of the Greater London Council, and opened in 1970. Its radial design meant that it was received with high praise, and was given several awards for architectural quality.

Project dates Start: 11-02-2008 End: 19-04-2008

Previous/future work Not known / Not known

Any associated project reference codes PIM-07 - Sitecode

Type of project Building Recording

Site status None

Current Land use Community Service 1 - Community Buildings

Monument type SCHOOL Modern

Significant Finds NONE

Methods & techniques 'Measured Survey', 'Photographic Survey', 'Survey/Recording Of Fabric/Structure'

Prompt Direction from Local Planning Authority - PPG15

Project location

Country	England
Site location	GREATER LONDON CITY OF WESTMINSTER CITY OF WESTMINSTER Pimlico School
Postcode	SW1
Study area	1.80 Hectares
Site coordinates	TQ 2945 7819 51.4873240715 -0.135332030267 51 29 14 N 000 08 07 W Point

Project creators

Name of Organisation	Pre-Construct Archaeology Ltd
----------------------	-------------------------------

Project brief originator	GLAAS
--------------------------	-------

Project design originator	Pre-Construct Archaeology Ltd
---------------------------	-------------------------------

Project director/manager	Alex Rose-Deacon
--------------------------	------------------

Project supervisor	Helen Robertson
--------------------	-----------------

Type of sponsor/funding body	Developer
------------------------------	-----------

Name of sponsor/funding body	Bouygues UK Ltd
------------------------------	-----------------

Project archives

Physical Archive Exists?	No
--------------------------	----

Digital Archive recipient	LAARC
---------------------------	-------

Digital Archive ID	PIM 07
Digital Contents	'other'
Digital Media available	'Survey','Text'
Paper Archive recipient	LAARC
Paper Archive ID	PIM 07
Paper Contents	'other'
Paper Media available	'Drawing','Map','Photograph','Plan','Report','Survey '

Project bibliography 1	
Publication type	Grey literature (unpublished document/manuscript)
Title	Historic building recording of Pimlico School, Lupus Street, SW1, City of Westminster
Author(s)/Editor(s)	Rose-Deacon, A., Robertson, H, Rhys, R and Thompson, G
Date	2008
Issuer or publisher	Pre-Construct Archaeology Ltd.
Place of issue or publication	London
Description	A4 ringbound volume including text, illustrations and plates
Entered by	Helen Robertson (hrobertson@pre-construct.com)
Entered on	20 July 2008

APPENDIX 2

Photograph register 1

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
1	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		W-S/W		From St Saviours Church towards school
2	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		W-S/W		From St Saviours Church towards school
3	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		W-S/W		From St Saviours Church towards school
4	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		W		Shot of eastern end of school
5	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		W	Context	General shot of east end of school
6	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		E	School	shot of west end of school
7	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		E	General	Context shot of western end
8	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		S/E	General	context shot of St Saviours and school
9	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		S/E	General	Context shot for school for corner of Claverton Street and Lupus Street
10	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		S/E	General	Context shot for school for corner of Claverton Street and Lupus Street
11	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		S/E	Steps	Shot of steps and school in context
12	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		S/E	Steps	Shot of steps and school in context
13	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		S	Front of School	Façade of school
14	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		S	Front of School	Façade of school
15	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		S	Front of School	Front and East end of school
16	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		S/W	Internal shot	Internal of music room
17	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		S/W	Internal shot	Internal of music room

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
18	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		N	Internal shot	Internal of music room with window control box
19	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		N	Internal shot	Internal shot of corridor
20	PIM-07	Pimlico School	Digital Canon 400 D D100	12-Feb-08		W	Internal shot	shot of store
21	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		W	External	detail of buttress on west end
22	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		S	External	detail of buttress on west end
23	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		S	External	Detail of north-west corner of school
24	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N	External	Detail of north-west corner of school
25	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N	External	General shot of west end
26	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		E-N/E	External	General shot of west end
27	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		E-N/E	External	Shot down length of building
28	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N/W	External	Shot down length of building
29	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		W	External	Rear of swimming pool
30	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		E-N/E	External	Shot of swimming pool and rear wall
31	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		W-S/W	External	Detail of louvers by swimming pool
32	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N	External	General of south playing space
33	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N	External	General of south playing space
34	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N	External	View of length of south side of school
35	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N	External	View of length of south side of school
36	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N	External	View of length of south side of school
37	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N	External	View of length of south side of school, further along

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
38	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N	External	View of length of south side of school, further along
39	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N	External	View of length of south side of school, further along
40	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		E	External	Placement shot of south side of school
41	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N/E	External	South side of school
42	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		W-SW	External	South side looking at west end
43	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N/E	External	South side, east end
44	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N/E	External	South side, east end
45	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		E-N/E	External	South side, east end and play area
46	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		E-N/E	External	South side, east end and play area
47	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		E	External	North side, spiral stairs
48	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		E	External	North side, spiral stairs
49	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		E	External	Detail of spiral stairs
50	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N-N/W	External	Shot of space by stairs
51	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N	External	Shot of vehicular ramp
52	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		E	Detail	Shot by spiral stairs showing salt mineralization
53	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		E	Detail	Shot by spiral stairs showing salt mineralisation
54	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		S-S/E	External	Shot by spiral stairs
55	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N-N/W	External	Shot of north side by entrance
56	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N-N/W	External	Shot of north side by entrance
57	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		W-S/W	External	North side, length of school
58	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		S-S/W	External	East end of school

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
59	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		S	External	East end profile of school
60	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		S	External	East end profile of school
61	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		S-S/E	External	Central entrance north side
62	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		S-S/E	External	East entrance north side
63	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N/E	Internal, G1	Diagonal shot of swimming pool
64	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N/E	Internal, G2	Diagonal shot of girls changing room
65	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N-N/E	Internal, G4	Diagonal of hallway
66	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N/W	Internal, G3	Diagonal of boys changing room
67	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		S/E	Internal, G5	Diagonal of hallway
68	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		S/W	Internal, G6	Diagonal of office
69	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		S	Internal, G7	Diagonal of office
70	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N	Internal, G8	Diagonal of gym
71	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N	Internal, G8	Diagonal of gym
72	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		S/E	Internal, G8	Opposite diagonal of gym
73	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		S/W	Internal, G10	Diagonal of hallway
74	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		S/E	Internal, G10	Diagonal of hallway
75	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N-N/W	Internal, G9	Diagonal of gym on the right
76	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		S/E	Internal, G9	Opposite diagonal pf gym on the right
77	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		S-S/W	Internal, G11	Diagonal of shower room
78	PIM-07	Pimlico School	Digital Canon 400 D D100	13-Feb-08		N	Internal, G11	Shot of changing room
79	PIM-07	Pimlico School	Digital Canon 400 D D100	14-Feb-08		N	External	West end from roof of Dolphin Square
80	PIM-07	Pimlico School	Digital Canon 400 D D100	14-Feb-08		N/E	External	School from Dolphin Square roof
81	PIM-07	Pimlico School	Digital Canon 400 D D100	14-Feb-08		N	External	Centre of school from Dolphin Square roof

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
82	PIM-07	Pimlico School	Digital Canon 400 D D100	14-Feb-08		N	External	East end of school from Dolphin Square roof
83	PIM-07	Pimlico School	Digital Canon 400 D D100	14-Feb-08		N/W	External	School from Dolphin Square roof
84	PIM-07	Pimlico School	Digital Canon 400 D D100	14-Feb-08		S	External	Main entrance
85	PIM-07	Pimlico School	Digital Canon 400 D D100	14-Feb-08		S	External	Main entrance

Photograph register 2

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
1	PIM-07	Pimlico School	Medium Format, 120. Colour No. 100	12-Feb-08		W	General	General shot from east end
2	PIM-07	Pimlico School	Medium Format, 120. Colour No. 100	12-Feb-08		W	General	General shot from east end
3	PIM-07	Pimlico School	Medium Format, 120. Colour No. 100	12-Feb-08		W	General	General shot from east end
4	PIM-07	Pimlico School	Medium Format, 120. Colour No. 100	12-Feb-08		E	Context shot	General shot from west end
5	PIM-07	Pimlico School	Medium Format, 120. Colour No. 100	12-Feb-08		E	Context shot	General shot from west end
6	PIM-07	Pimlico School	Medium Format, 120. Colour No. 100	12-Feb-08		E	Context shot	General shot from west end
7	PIM-07	Pimlico School	Medium Format, 120. Colour No. 100	12-Feb-08		S/E	Context shot	General shot of St Saviours and school
8	PIM-07	Pimlico School	Medium Format, 120. Colour No. 100	12-Feb-08		S/E	Context shot	General shot of St Saviours and school
9	PIM-07	Pimlico School	Medium Format, 120. Colour No. 100	12-Feb-08		S/E	Context shot	General shot of St Saviours and school
10	PIM-07	Pimlico School	Medium Format, 120. Colour No. 100	12-Feb-08		E	Context shot	Shot of west end of school
11	PIM-07	Pimlico School	Medium Format, 120. Colour No. 100	12-Feb-08		E	Context shot	Shot of west end of school
12	PIM-07	Pimlico School	Medium Format, 120. Colour No. 100	12-Feb-08		E	Context shot	Shot of west end of school
13	PIM-07	Pimlico School	Medium Format, 120. Colour No. 100	12-Feb-08		S/E	General	Shot from corner of Claverton Street

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
								and Lupus Street
14	PIM-07	Pimlico School	Medium Format, 120. Colour No. 100	12-Feb-08		S/E	General	Shot from corner of Claverton Street and Lupus Street
15	PIM-07	Pimlico School	Medium Format, 120. Colour No. 100	12-Feb-08		S/E	General	Shot from corner of Claverton Street and Lupus Street

Photograph register 3

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
1	PIM-07	Pimlico School	Medium Format, 120. B/W No. 101	12-Feb-08		W	General	General shot from east end
2	PIM-07	Pimlico School	Medium Format, 120. B/W No. 101	12-Feb-08		W	General	General shot from east end
3	PIM-07	Pimlico School	Medium Format, 120. B/W No. 101	12-Feb-08		W	General	General shot from east end
4	PIM-07	Pimlico School	Medium Format, 120. B/W No. 101	12-Feb-08		E	Context shot	General shot from west end
5	PIM-07	Pimlico School	Medium Format, 120. B/W No. 101	12-Feb-08		E	Context shot	General shot from west end
6	PIM-07	Pimlico School	Medium Format, 120. B/W No. 101	12-Feb-08		E	Context shot	General shot from west end
7	PIM-07	Pimlico School	Medium Format, 120. B/W No. 101	12-Feb-08		S/E	Context shot	General shot of St Saviours and school
8	PIM-07	Pimlico School	Medium Format, 120. B/W No. 101	12-Feb-08		S/E	Context shot	General shot of St Saviours and school
9	PIM-07	Pimlico School	Medium Format, 120. B/W No. 101	12-Feb-08		S/E	Context shot	General shot of St Saviours and school
10	PIM-07	Pimlico School	Medium Format, 120. B/W No. 101	12-Feb-08		E	Context shot	Shot of west end of school
11	PIM-07	Pimlico School	Medium Format, 120. B/W No. 101	12-Feb-08		E	Context shot	Shot of west end of school
12	PIM-07	Pimlico School	Medium Format, 120. B/W No. 101	12-Feb-08		E	Context shot	Shot of west end of school

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
13	PIM-07	Pimlico School	Medium Format, 120. B/W No. 101	12-Feb-08		S/E	General	Shot from corner of Claverton Street and Lupus Street
14	PIM-07	Pimlico School	Medium Format, 120. B/W No. 101	12-Feb-08		S/E	General	Shot from corner of Claverton Street and Lupus Street
15	PIM-07	Pimlico School	Medium Format, 120. B/W No. 101	12-Feb-08		S/E	General	Shot from corner of Claverton Street and Lupus Street

Photograph register 4

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
1	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		W-S/W	Overhead shot	Shot from St Saviours Church to school
2	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		W-S/W	Overhead shot	Shot from St Saviours Church to school
3	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		W-S/W	Overhead shot	Shot from St Saviours Church to school
4	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		W	General	Shot of eastern end of school
5	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		W	General	Shot of eastern end of school
6	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		W	General	Shot of eastern end of school
7	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		W	Context shot	General of eastern end
8	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		W	Context shot	General of eastern end
9	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		W	Context shot	General of eastern end
10	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		E	General	Shot of western end of school
11	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		E	General	Shot of western end of school
12	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		E	General	Shot of western end of school
13	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		S/E	Context shot	Shot of western end of school with St Saviours and school

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
14	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		S/E	Context shot	Shot of western end of school with St Saviours and school
15	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		S/E	Context shot	Shot of western end of school with St Saviours and school
16	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		E	General	Shot of west end of school
17	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		E	General	Shot of west end of school
18	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		E	General	Shot of west end of school
19	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		S/E	General	Whole school from Claverton Street and Lupus Street
20	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		S/E	General	Whole school from Claverton Street and Lupus Street
21	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		S/E	General	Whole school from Claverton Street and Lupus Street
22	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		S	Context shot	Steps and school in context
23	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		S	Context shot	Steps and school in context
24	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		S	Context shot	Steps and school in context
25	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		S	Front of school	Front of school and east corner
26	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		S	Front of school	Front of school and east corner
27	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		S	Front of school	Front of school and east corner
28	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		S/W	Internal, F1	Shot of music room
29	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		S/W	Internal, F1	Shot of music room
30	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		S/W	Internal, F1	Shot of music room
31	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		S/W	Internal, F1	Shot of music room, with window control box
32	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		S/W	Internal, F1	Shot of music room, with window control box

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
33	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		S/W	Internal, F1	Shot of music room, with window control box
34	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		W	Internal, F2	Shot of corridor
35	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		W	Internal, F2	Shot of corridor
36	PIM-07	Pimlico School	35mm, Colour 102	12-Feb-08		W	Internal, F2	Shot of corridor

Photograph register 5

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
1	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		W-S/W	Overhead shot	Shot from St Saviours Church to school
2	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		W-S/W	Overhead shot	Shot from St Saviours Church to school
3	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		W-S/W	Overhead shot	Shot from St Saviours Church to school
4	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		W	General	Shot of eastern end of school
5	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		W	General	Shot of eastern end of school
6	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		W	General	Shot of eastern end of school
7	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		W	Context shot	General of eastern end
8	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		W	Context shot	General of eastern end
9	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		W	Context shot	General of eastern end
10	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		E	General	Shot of western end of school
11	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		E	General	Shot of western end of school
12	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		E	General	Shot of western end of school
13	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		S/E	Context shot	Shot of western end of school with St Saviours and school
14	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		S/E	Context shot	Shot of western end of school with St Saviours and school

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
15	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		S/E	Context shot	Shot of western end of school with St Saviours and school
16	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		E	General	Shot of west end of school
17	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		E	General	Shot of west end of school
18	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		E	General	Shot of west end of school
19	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		S/E	General	Whole school from Claverton Street and Lupus Street
20	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		S/E	General	Whole school from Claverton Street and Lupus Street
21	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		S/E	General	Whole school from Claverton Street and Lupus Street
22	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		S	Context shot	Steps and school in context
23	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		S	Context shot	Steps and school in context
24	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		S	Context shot	Steps and school in context
25	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		S	Front of school	Front of school and east corner
26	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		S	Front of school	Front of school and east corner
27	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		S	Front of school	Front of school and east corner
28	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		S/W	Internal, F1	Shot of music room
29	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		S/W	Internal, F1	Shot of music room
30	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		S/W	Internal, F1	Shot of music room
31	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		S/W	Internal, F1	Shot of music room, with window control box
32	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		S/W	Internal, F1	Shot of music room, with window control box
33	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		S/W	Internal, F1	Shot of music room, with window control box

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
34	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		W	Internal, F2	Shot of corridor
35	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		W	Internal, F2	Shot of corridor
36	PIM-07	Pimlico School	35mm, B/W 103	12-Feb-08		W	Internal, F2	Shot of corridor

Photograph register 6

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
1	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		S/SE	LG 4	Original fire alarm
2	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		S/E	LG 7	Typical layout with blocking
3	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		E-N/E	LG 12	Change in ceiling deadlights
4	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		W-N/W	LG 21	Original stairwell
5	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		N/E	LG 21	Other side of stairwell
6	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		N-N/E	LG 23	Original meter box and window
7	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		S/W	LG 28	General shot of room and original cupboard
8	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		S/E	LG 34	Original layout and cupboard space
9	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		E-S/E	LG 40	Original layout and water damage
10	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		E	LG 47	Scarring on floor and original feature
11	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		N	LG 47	Original electricity box
12	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		W-S/W	LG 49	Scarring of removed wall
13	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		W-S/W	LG 49	Scarring of removed wall
14	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		N/W	Outside of LG 52 and LG 54	Original machinery casing
15	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		N/W	LG 75	General shot of kitchen
16	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		E-N/E	LG 70	Original fire alarm
17	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		S	LG 79	Original dumb waiter
18	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		S	LG 79	Original dumb waiter
19	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		S	LG 79	Original dumb waiter

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
20	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		E	LG 54	Boiler room plans
21	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		E	LG 54	Boiler room plans
22	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		E	LG 54	Boiler room plans
23	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		E	LG 54	Boiler room plans
24	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		E	LG 54	Boiler room plans
25	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		S-S/E	LG 54	General shot of boiler room
26	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		W-N/W	LG 43	Modern alterations
27	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		W-N/W	G 18	Ramp and hall
28	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		W-N/W	G 18	Shot towards G 22
29	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		W-N/W	G 18	Shot towards G 22
30	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		E-N/E	G 4	Showing modern alterations
31	PIM-07	Pimlico School	Digital Canon 400 D D101	08-Apr-08		N/E	G 7	New room
32	PIM-07	Pimlico School	Digital Canon 400 D D101	12-Feb-08		N-N/W	Towards G51 and G54	Recess showing original detail
33	PIM-07	Pimlico School	Digital Canon 400 D D101	12-Feb-08		S/E	G38 towards G39	Modern partitioning
34	PIM-07	Pimlico School	Digital Canon 400 D D101	12-Feb-08		S-S/W	G 44	Original layout and window blinds
35	PIM-07	Pimlico School	Digital Canon 400 D D101	12-Feb-08		S-S/W	G 44	Original layout and window blinds
36	PIM-07	Pimlico School	Digital Canon 400 D D101	12-Feb-08		N/E	F 1	Original layout and spiral stairs

Photograph register 7

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
1	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		N-N/W	F 1	Main access and modern partition
2	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		E-S/E	F 1	Main reception hall
3	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		N/W	F 8	Assembly hall
4	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		S/E	F 8	Assembly hall

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
5	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		N-N/E	F 3	Ceiling line and window line
6	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		W	F 30	General layout in library
7	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		W	F 30	General layout in library
8	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		S/W	F 44	Pottery room with window and cupboard
9	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		E	F 45	General layout and original bench
10	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		N-N/E	F 49	General layout and modern roller door
11	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		S/E	F 50	Original blackboard and speaker
12	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		N-N/W	S 35	Top of stairwell
13	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		N-N/W	S 35	Bottom of stairwell
14	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		S	S 43	Spiral stairway
15	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		UP-N	S 43	View of stairway and skylight
16	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		UP-W	S 43	View of stairway and skylight
17	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		N	S 52	Detail of original fixtures: pulleys and hook
18	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		N	S 52	Detail of original fixtures: pulleys and hook
19	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		W-S/W	S 30	Detail of original tannoy/speaker system
20	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		E-N/E	LG 42	General layout
21	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		E-N/E	LG 42	General layout
22	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		E	S 22	Partition and original cupboard
23	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		W	S 1	Spiral stairway
24	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		W-S/W	S 6	Original toilets
25	PIM-07	Pimlico School	Digital Canon 400 D D102	09-Apr-08		S/W	S 20	General layout and stepping

Photograph register 8

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
----	-----------	-----------	-----------------	------	----------	-----------	------------	----------

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
1	PIM-07	Pimlico School	Medium Format 120. Colour No.104	12-Feb-08		S	External	Steps and school in context from Lupus Street
2	PIM-07	Pimlico School	Medium Format 120. Colour No.104	12-Feb-08		S	External	Steps and school in context from Lupus Street
3	PIM-07	Pimlico School	Medium Format 120. Colour No.104	12-Feb-08		S	External	Steps and school in context from Lupus Street
4	PIM-07	Pimlico School	Medium Format 120. Colour No.104	12-Feb-08		S	External	Front façade of school
5	PIM-07	Pimlico School	Medium Format 120. Colour No.104	12-Feb-08		S	External	Front façade of school
6	PIM-07	Pimlico School	Medium Format 120. Colour No.104	12-Feb-08		S	External	Front façade of school
7	PIM-07	Pimlico School	Medium Format 120. Colour No.104	12-Feb-08		S	External	Shot of front and east corner
8	PIM-07	Pimlico School	Medium Format 120. Colour No.104	12-Feb-08		S	External	Shot of front and east corner
9	PIM-07	Pimlico School	Medium Format 120. Colour No.104	12-Feb-08		S	External	Shot of front and east corner
10	PIM-07	Pimlico School	Medium Format 120. Colour No.104	12-Feb-08		S/W	Internal	Internal shot of music room
11	PIM-07	Pimlico School	Medium Format 120. Colour No.104	12-Feb-08		S/W	Internal	Internal shot of music room
12	PIM-07	Pimlico School	Medium Format 120. Colour No.104	12-Feb-08		S/W	Internal	Internal shot of music room
13	PIM-07	Pimlico School	Medium Format 120. Colour No.104	12-Feb-08		S	External	Shot of north-west corner of school
14	PIM-07	Pimlico School	Medium Format 120. Colour No.104	12-Feb-08		S	External	Shot of north-west corner of school
15	PIM-07	Pimlico School	Medium Format 120. Colour No.104	12-Feb-08		S	External	Shot of north-west corner of school

Photograph register 9

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
----	-----------	-----------	-----------------	------	----------	-----------	------------	----------

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
1	PIM-07	Pimlico School	Medium Format 120. B/W No.105	12-Feb-08		S	External	Steps and school in context from Lupus Street
2	PIM-07	Pimlico School	Medium Format 120. B/W No.105	12-Feb-08		S	External	Steps and school in context from Lupus Street
3	PIM-07	Pimlico School	Medium Format 120. B/W No.105	12-Feb-08		S	External	Steps and school in context from Lupus Street
4	PIM-07	Pimlico School	Medium Format 120. B/W No.105	12-Feb-08		S	External	Front façade of school
5	PIM-07	Pimlico School	Medium Format 120. B/W No.105	12-Feb-08		S	External	Front façade of school
6	PIM-07	Pimlico School	Medium Format 120. B/W No.105	12-Feb-08		S	External	Front façade of school
7	PIM-07	Pimlico School	Medium Format 120. B/W No.105	12-Feb-08		S	External	Shot of front and east corner
8	PIM-07	Pimlico School	Medium Format 120. B/W No.105	12-Feb-08		S	External	Shot of front and east corner
9	PIM-07	Pimlico School	Medium Format 120. B/W No.105	12-Feb-08		S	External	Shot of front and east corner
10	PIM-07	Pimlico School	Medium Format 120. B/W No.105	12-Feb-08		S/W	Internal	Internal shot of music room-failed shot
11	PIM-07	Pimlico School	Medium Format 120. B/W No.105	12-Feb-08		S/W	Internal	Internal shot of music room-failed shot
12	PIM-07	Pimlico School	Medium Format 120. B/W No.105	12-Feb-08		S/W	Internal	Internal shot of music room-failed shot
13	PIM-07	Pimlico School	Medium Format 120. B/W No.105	12-Feb-08		S	External	Shot of north-west corner of school
14	PIM-07	Pimlico School	Medium Format 120. B/W No.105	12-Feb-08		S	External	Shot of north-west corner of school
15	PIM-07	Pimlico School	Medium Format 120. B/W No.105	12-Feb-08		S	External	Shot of north-west corner of school

Photograph register 10

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
1	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		N	Cupboard	Shot of storage cupboard in F3

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
2	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		N	Cupboard	Shot of storage cupboard in F3
3	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		N	Cupboard	Shot of storage cupboard in F3
4	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		S	External	North-west corner of site
5	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		S	External	North-west corner of site
6	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		S	External	North-west corner of site
7	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		N	External	General shot of west end of school
8	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		N	External	General shot of west end of school
9	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		N	External	General shot of west end of school
10	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		E-N/E	External	Shot down the length of the school
11	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		E-N/E	External	Shot down the length of the school
12	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		E-N/E	External	Shot down the length of the school
13	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		N-N/W	External	Shot of space by stairs
14	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		N-N/W	External	Shot of space by stairs
15	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		N-N/W	External	Shot of space by stairs
16	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		N	External	Shot of vehicular ramp
17	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		N	External	Shot of vehicular ramp
18	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		N	External	Shot of vehicular ramp
19	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		E	Detail	By spiral stair, salt mineralization
20	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		E	Detail	By spiral stair, salt mineralization
21	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		E	Detail	By spiral stair, salt mineralisation
22	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		S-S/E	External	By spiral stairs, along corridor
23	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		S-S/E	External	By spiral stairs, along corridor
24	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		S-S/E	External	By spiral stairs, along corridor

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
25	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		N/E	Internal G 1	Diagonal shot of swimming pool
26	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		N/E	Internal G 1	Diagonal shot of swimming pool
27	PIM-07	Pimlico School	35mm Colour No. 106	13-Feb-08		N/E	Internal G 1	Diagonal shot of swimming pool

Photograph register 11

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
1	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		N	Cupboard	Shot of storage cupboard in F 3
2	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		N	Cupboard	Shot of storage cupboard in F 3
3	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		N	Cupboard	Shot of storage cupboard in F 3
4	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		S	External	North-west corner of school
5	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		S	External	North-west corner of school
6	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		S	External	North-west corner of school
7	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		N	External	General shot of west end of school
8	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		N	External	General shot of west end of school
9	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		N	External	General shot of west end of school
10	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		E-N/E	External	Shot down length of school
11	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		E-N/E	External	Shot down length of school
12	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		E-N/E	External	Shot down length of school
13	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		N/W	External	Rear of swimming pool
14	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		N/W	External	Rear of swimming pool
15	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		N/W	External	Rear of swimming pool
16	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		W	External	Swimming pool and rear boundary wall
17	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		W	External	Swimming pool and rear boundary wall
18	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		W	External	Swimming pool and rear boundary wall

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
19	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		W-S/W	External	General shot of south playing space
20	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		W-S/W	External	General shot of south playing space
21	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		W-S/W	External	General shot of south playing space
22	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		W	External	General shot of south playing space
23	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		W	External	General shot of south playing space
24	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		W	External	General shot of south playing space
25	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		N	External	View of south length of school
26	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		N	External	View of south length of school
27	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		N	External	View of south length of school
28	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		N	External	View of south length of school, further east
29	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		N	External	View of south length of school, further east
30	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		N	External	View of south length of school, further east
31	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		E	External	Placement shot of south side of school
32	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		E	External	Placement shot of south side of school
33	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		E	External	Placement shot of south side of school
34	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		N/E	External	South side of school, east end
35	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		N/E	External	South side of school, east end
36	PIM-07	Pimlico School	35mm B/W No. 107	13-Feb-08		N/E	External	South side of school, east end

Photograph register 12

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
----	-----------	-----------	-----------------	------	----------	-----------	------------	----------

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
1	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		N/E	External	Shot of south side of school, east end
2	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		N/E	External	Shot of south side of school, east end
3	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		N/E	External	Shot of south side of school, east end
4	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		E	External	Shot of north of school and spiral stairs
5	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		E	External	Shot of north of school and spiral stairs
6	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		E	External	Shot of north of school and spiral stairs
7	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		N-N/W	External	Shot of space by stairs
8	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		N-N/W	External	Shot of space by stairs
9	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		N-N/W	External	Shot of space by stairs
10	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		N	External	Shot of vehicular ramp
11	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		N	External	Shot of vehicular ramp
12	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		N	External	Shot of vehicular ramp
13	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		E	Detail	By spiral stairs, salt mineralisation
14	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		E	Detail	By spiral stairs, salt mineralisation

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
			108					
15	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		E	Detail	By spiral stairs, salt mineralisation
16	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		S-S/E	External	By spiral stairs, down corridor
17	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		S-S/E	External	By spiral stairs, down corridor
18	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		S-S/E	External	By spiral stairs, down corridor
19	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		N-N/W	External	Shot of north side by entrance
20	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		N-N/W	External	Shot of north side by entrance
21	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		N-N/W	External	Shot of north side by entrance
22	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		S-S/W	External	East end of school
23	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		S-S/W	External	East end of school
24	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		S-S/W	External	East end of school
25	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		S	External	East end profile of school
26	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		S	External	East end profile of school
27	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		S	External	East end profile of school

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
28	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		S-S/E	External	Central entrance, north side
29	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		S-S/E	External	Central entrance, north side
30	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		S-S/E	External	Central entrance, north side
31	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		S-S/E	External	East entrance, north side
32	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		S-S/E	External	East entrance, north side
33	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		S-S/E	External	East entrance, north side
34	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		N/E	Internal	Shot of swimming pool
35	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		N/E	Internal	Shot of swimming pool
36	PIM-07	Pimlico School	35mm B/W No. 109. Failed colour film No. 108	13-Feb-08		N/E	Internal	Shot of swimming pool

Photograph register 13

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
1	PIM-07	Pimlico School	Medium Format, 120. Colour No. 110	13-Feb-08		N/E	External	South side of school, east end
2	PIM-07	Pimlico School	Medium Format, 120. Colour No. 110	13-Feb-08		N/E	External	South side of school, east end
3	PIM-07	Pimlico School	Medium Format, 120. Colour No. 110	13-Feb-08		N/E	External	South side of school, east end
4	PIM-07	Pimlico School	Medium Format, 120. Colour No. 110	13-Feb-08		E	External	Spiral stairs, north end

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
5	PIM-07	Pimlico School	Medium Format, 120. Colour No. 110	13-Feb-08		E	External	Spiral stairs, north end
6	PIM-07	Pimlico School	Medium Format, 120. Colour No. 110	13-Feb-08		E	External	Spiral stairs, north end
7	PIM-07	Pimlico School	Medium Format, 120. Colour No. 110	13-Feb-08		W-S/W	External	North side, showing length of school
8	PIM-07	Pimlico School	Medium Format, 120. Colour No. 110	13-Feb-08		W-S/W	External	North side, showing length of school
9	PIM-07	Pimlico School	Medium Format, 120. Colour No. 110	13-Feb-08		W-S/W	External	North side, showing length of school
10	PIM-07	Pimlico School	Medium Format, 120. Colour No. 110	13-Feb-08		S	External	East end of school, profile
11	PIM-07	Pimlico School	Medium Format, 120. Colour No. 110	13-Feb-08		S	External	East end of school, profile
12	PIM-07	Pimlico School	Medium Format, 120. Colour No. 110	13-Feb-08		S	External	East end of school, profile
13	PIM-07	Pimlico School	Medium Format, 120. Colour No. 110	13-Feb-08		N	Internal G8	Diagonal shot of gym
14	PIM-07	Pimlico School	Medium Format, 120. Colour No. 110	13-Feb-08		N	Internal G8	Diagonal shot of gym
15	PIM-07	Pimlico School	Medium Format, 120. Colour No. 110	13-Feb-08		N	Internal G8	Diagonal shot of gym

Photograph register 14

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
1	PIM-07	Pimlico School	Medium Format, 120. B/W No. 111	13-Feb-08		N/E	External	South side of school, east end
2	PIM-07	Pimlico School	Medium Format, 120. B/W No. 111	13-Feb-08		N/E	External	South side of school, east end
3	PIM-07	Pimlico School	Medium Format, 120. B/W No. 111	13-Feb-08		N/E	External	South side of school, east end
4	PIM-07	Pimlico School	Medium Format, 120. B/W No. 111	13-Feb-08		E	External	Spiral stairs, north end
5	PIM-07	Pimlico School	Medium Format, 120. B/W No. 111	13-Feb-08		E	External	Spiral stairs, north end
6	PIM-07	Pimlico School	Medium Format, 120. B/W No. 111	13-Feb-08		E	External	Spiral stairs, north end

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
			111					
7	PIM-07	Pimlico School	Medium Format, 120. B/W No. 111	13-Feb-08		W-S/W	External	North side, showing length of school
8	PIM-07	Pimlico School	Medium Format, 120. B/W No. 111	13-Feb-08		W-S/W	External	North side, showing length of school
9	PIM-07	Pimlico School	Medium Format, 120. B/W No. 111	13-Feb-08		W-S/W	External	North side, showing length of school
10	PIM-07	Pimlico School	Medium Format, 120. B/W No. 111	13-Feb-08		S	External	East end of school, profile
11	PIM-07	Pimlico School	Medium Format, 120. B/W No. 111	13-Feb-08		S	External	East end of school, profile
12	PIM-07	Pimlico School	Medium Format, 120. B/W No. 111	13-Feb-08		S	External	East end of school, profile
13	PIM-07	Pimlico School	Medium Format, 120. B/W No. 111	13-Feb-08		N	Internal G8	Diagonal shot of gym
14	PIM-07	Pimlico School	Medium Format, 120. B/W No. 111	13-Feb-08		N	Internal G8	Diagonal shot of gym
15	PIM-07	Pimlico School	Medium Format, 120. B/W No. 111	13-Feb-08		N	Internal G8	Diagonal shot of gym

Photograph register 15

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
1	PIM-07	Pimlico School	Medium Format, 120. Colour No. 112	13-Feb-08		N	External	General shot of west end of school
2	PIM-07	Pimlico School	Medium Format, 120. Colour No. 112	13-Feb-08		N	External	General shot of west end of school
3	PIM-07	Pimlico School	Medium Format, 120. Colour No. 112	13-Feb-08		N	External	General shot of west end of school
4	PIM-07	Pimlico School	Medium Format, 120. Colour No. 112	13-Feb-08		E-N/E	External	Shot of length of building
5	PIM-07	Pimlico School	Medium Format, 120. Colour No. 112	13-Feb-08		E-N/E	External	Shot of length of building
6	PIM-07	Pimlico School	Medium Format, 120. Colour No. 112	13-Feb-08		E-N/E	External	Shot of length of building
7	PIM-07	Pimlico School	Medium Format, 120. Colour No. 112	13-Feb-08		E-N/E	External	Detail of Louvres by swimming pool

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
8	PIM-07	Pimlico School	Medium Format, 120. Colour No. 112	13-Feb-08		E-N/E	External	Detail of Louvres by swimming pool
9	PIM-07	Pimlico School	Medium Format, 120. Colour No. 112	13-Feb-08		E-N/E	External	Detail of Louvres by swimming pool
10	PIM-07	Pimlico School	Medium Format, 120. Colour No. 112	13-Feb-08		N/E	External	South side, east end of school
11	PIM-07	Pimlico School	Medium Format, 120. Colour No. 112	13-Feb-08		N/E	External	South side, east end of school
12	PIM-07	Pimlico School	Medium Format, 120. Colour No. 112	13-Feb-08		N/E	External	South side, east end of school
13	PIM-07	Pimlico School	Medium Format, 120. Colour No. 112	13-Feb-08		W-S/W	External	South side looking at west end
14	PIM-07	Pimlico School	Medium Format, 120. Colour No. 112	13-Feb-08		W-S/W	External	South side looking at west end
15	PIM-07	Pimlico School	Medium Format, 120. Colour No. 112	13-Feb-08		W-S/W	External	South side looking at west end

Photograph register 16

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
1	PIM-07	Pimlico School	Medium Format, 120. B/W No. 113	13-Feb-08		N	External	General shot of west end of school
2	PIM-07	Pimlico School	Medium Format, 120. B/W No. 113	13-Feb-08		N	External	General shot of west end of school
3	PIM-07	Pimlico School	Medium Format, 120. B/W No. 113	13-Feb-08		N	External	General shot of west end of school
4	PIM-07	Pimlico School	Medium Format, 120. B/W No. 113	13-Feb-08		E-N/E	External	Shot of length of building
5	PIM-07	Pimlico School	Medium Format, 120. B/W No. 113	13-Feb-08		E-N/E	External	Shot of length of building
6	PIM-07	Pimlico School	Medium Format, 120. B/W No. 113	13-Feb-08		E-N/E	External	Shot of length of building
7	PIM-07	Pimlico School	Medium Format, 120. B/W No. 113	13-Feb-08		E-N/E	External	Detail of Louvres by swimming pool
8	PIM-07	Pimlico School	Medium Format, 120. B/W No. 113	13-Feb-08		E-N/E	External	Detail of Louvres by swimming pool
9	PIM-07	Pimlico School	Medium Format, 120. B/W No. 113	13-Feb-08		E-N/E	External	Detail of Louvres by

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
			113					swimming pool
10	PIM-07	Pimlico School	Medium Format, 120. B/W No. 113	13-Feb-08		N/E	External	South side, east end of school
11	PIM-07	Pimlico School	Medium Format, 120. B/W No. 113	13-Feb-08		N/E	External	South side, east end of school
12	PIM-07	Pimlico School	Medium Format, 120. B/W No. 113	13-Feb-08		N/E	External	South side, east end of school
13	PIM-07	Pimlico School	Medium Format, 120. B/W No. 113	13-Feb-08		W-S/W	External	South side looking at west end
14	PIM-07	Pimlico School	Medium Format, 120. B/W No. 113	13-Feb-08		W-S/W	External	South side looking at west end
15	PIM-07	Pimlico School	Medium Format, 120. B/W No. 113	13-Feb-08		W-S/W	External	South side looking at west end

Photograph register 17

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
1	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		N	Internal G 11	Diagonal shot of changing room
2	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		N	Internal G 11	Diagonal shot of changing room
3	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		N	Internal G 11	Diagonal shot of changing room
4	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		S-S/W	Internal G 11	Diagonal shot of shower room
5	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		S-S/W	Internal G 11	Diagonal shot of shower room
6	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		S-S/W	Internal G 11	Diagonal shot of shower room
7	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		S-S/E	Internal G 10	Shot down hall
8	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		S-S/E	Internal G 10	Shot down hall
9	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		S-S/E	Internal G 10	Shot down hall
10	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		S/W	Internal G 10	Shot down hall

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
11	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		S/W	Internal G 10	Shot down hall
12	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		S/W	Internal G 10	Shot down hall
13	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		N/E	Internal G 14	Diagonal shot of hallway
14	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		N/E	Internal G 14	Diagonal shot of hallway
15	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		N/E	Internal G 14	Diagonal shot of hallway
16	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		N-N/E	Internal G 9	Diagonal shot of gym on right
17	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		N-N/E	Internal G 9	Diagonal shot of gym on right
18	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		N-N/E	Internal G 9	Diagonal shot of gym on right
19	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		S/E	Internal G 9	Diagonal shot of gym on right, opposite shot
20	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		S/E	Internal G 9	Diagonal shot of gym on right, opposite shot
21	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		S/E	Internal G 9	Diagonal shot of gym on right, opposite shot
22	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		S/E	Internal G 5	Shot of hallway
23	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		S/E	Internal G 5	Shot of hallway
24	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		S/E	Internal G 5	Shot of hallway
25	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		W-S/W	Internal G 3	Diagonal shot of boys changing room
26	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		W-S/W	Internal G 3	Diagonal shot of boys changing room
27	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		W-S/W	Internal G 3	Diagonal shot of boys changing room
28	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		N/E	Internal G 2	Diagonal shot of girls changing room

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
29	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		N/E	Internal G 2	Diagonal shot of girls changing room
30	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		N/E	Internal G 2	Diagonal shot of girls changing room
31	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		S/W	Internal G 6	Diagonal shot of office
32	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		S/W	Internal G 6	Diagonal shot of office
33	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		S/W	Internal G 6	Diagonal shot of office
34	PIM-07	Pimlico School	35mm. B/W No. 115. Failed Colour No. 114	13-Feb-08		W-S/W	Internal G 7	Diagonal shot of staff room

Photograph register 18

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
1	PIM-07	Pimlico School	35mm. Colour No. 116	13-Feb-08		W-S/W	Internal G 7	Diagonal shot of staff room
2	PIM-07	Pimlico School	35mm. Colour No. 116	13-Feb-08		W-S/W	Internal G 7	Diagonal shot of staff room
3	PIM-07	Pimlico School	35mm. Colour No. 116	13-Feb-08		W-S/W	Internal G 7	Diagonal shot of staff room
4	PIM-07	Pimlico School	35mm. Colour No. 116	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
5	PIM-07	Pimlico School	35mm. Colour No. 116	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
6	PIM-07	Pimlico School	35mm. Colour No. 116	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
7	PIM-07	Pimlico School	35mm. Colour No. 116	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
8	PIM-07	Pimlico School	35mm. Colour No. 116	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
9	PIM-07	Pimlico School	35mm. Colour No. 116	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
10	PIM-07	Pimlico School	35mm. Colour No. 116	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
11	PIM-07	Pimlico School	35mm. Colour No. 116	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
12	PIM-07	Pimlico School	35mm. Colour No. 116	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
13	PIM-07	Pimlico School	35mm. Colour No. 116	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
14	PIM-07	Pimlico School	35mm. Colour No. 116	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
15	PIM-07	Pimlico School	35mm. Colour No. 116	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
16	PIM-07	Pimlico School	35mm. Colour No. 116	14-Feb-08		S-S/E	External	Shot of front gate of school
17	PIM-07	Pimlico School	35mm. Colour No. 116	14-Feb-08		S-S/E	External	Shot of front gate of school
18	PIM-07	Pimlico School	35mm. Colour No. 116	14-Feb-08		S-S/E	External	Shot of front gate of school

Photograph register 19

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
1	PIM-07	Pimlico School	35mm. B/W No. 117	13-Feb-08		W-S/W	Internal G 7	Diagonal shot of staff room
2	PIM-07	Pimlico School	35mm. B/W No. 117	13-Feb-08		W-S/W	Internal G 7	Diagonal shot of staff room
3	PIM-07	Pimlico School	35mm. B/W No. 117	13-Feb-08		W-S/W	Internal G 7	Diagonal shot of staff room
4	PIM-07	Pimlico School	35mm. B/W No. 117	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
5	PIM-07	Pimlico School	35mm. B/W No. 117	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
6	PIM-07	Pimlico School	35mm. B/W No. 117	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
7	PIM-07	Pimlico School	35mm. B/W No. 117	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
8	PIM-07	Pimlico School	35mm. B/W No. 117	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
9	PIM-07	Pimlico School	35mm. B/W No. 117	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
10	PIM-07	Pimlico School	35mm. B/W No. 117	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
11	PIM-07	Pimlico School	35mm. B/W No. 117	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square

ID	SITE CODE	SITE NAME	FILM TYPE + NO.	DATE	PLATE NO	DIRECTION	IDENTIFIER	COMMENTS
12	PIM-07	Pimlico School	35mm. B/W No. 117	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
13	PIM-07	Pimlico School	35mm. B/W No. 117	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
14	PIM-07	Pimlico School	35mm. B/W No. 117	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
15	PIM-07	Pimlico School	35mm. B/W No. 117	14-Feb-08		N-N/E	External	Shot taken from roof of Dolphin Square
16	PIM-07	Pimlico School	35mm. B/W No. 117	14-Feb-08		S-S/E	External	Shot of front gate of school
17	PIM-07	Pimlico School	35mm. B/W No. 117	14-Feb-08		S-S/E	External	Shot of front gate of school
18	PIM-07	Pimlico School	35mm. B/W No. 117	14-Feb-08		S-S/E	External	Shot of front gate of school